

Applicability of multi-objective optimization in classroom acoustics design using analytical and geometrical acoustic models

Original

Applicability of multi-objective optimization in classroom acoustics design using analytical and geometrical acoustic models / Lombardo, Angelo; Shtrepi, Louena; Astolfi, Arianna. - ELETTRONICO. - (2020), pp. 1605-1608. (Intervento presentato al convegno e-Forum Acusticum nel December 7-11, 2020) [10.48465/fa.2020.0782].

Availability:

This version is available at: 11583/2971716 since: 2022-09-25T22:02:08Z

Publisher:

HAL open science

Published

DOI:10.48465/fa.2020.0782

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)



HAL
open science

Applicability of multi-objective optimization in classroom acoustics design using analytical and geometrical acoustic models

Angelo Lombardo, Louena Shtrepi, Arianna Astolfi

► To cite this version:

Angelo Lombardo, Louena Shtrepi, Arianna Astolfi. Applicability of multi-objective optimization in classroom acoustics design using analytical and geometrical acoustic models. Forum Acusticum, Dec 2020, Lyon, France. pp.1605-1608, 10.48465/fa.2020.0782 . hal-03235291

HAL Id: hal-03235291

<https://hal.archives-ouvertes.fr/hal-03235291>

Submitted on 26 May 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

APPLICABILITY OF MULTI-OBJECTIVE OPTIMIZATION IN CLASSROOM ACOUSTICS DESIGN USING ANALYTICAL AND GEOMETRICAL ACOUSTIC MODELS

Angelo Lombardo Louena Shtrepi Arianna Astolfi

Department of Energy, Politecnico di Torino, Torino, Italy

Corresponding author's address: ang.rose33@gmail.com

ABSTRACT

The purpose of this study is to investigate the applicability of multi-objective optimization in classroom acoustics design. Specifically, typology, extension and position of acoustic materials have been optimized in order to improve acoustic quality of classrooms. It is addressed to architects, acousticians and professionals that are involved in acoustic design. One typical sized elementary classroom has been selected for this study and a basic geometric model has been built in Grasshopper, that serves as the environment for parametric investigation and improvement of acoustic parameters. Reverberation time and STI have been determined using analytical models and geometrical acoustic (GA) simulations carried out with Pachyderm software. Finally, Octopus has been used to perform multi-objective optimization runs considering as objectives the optimization of the acoustic parameters and the acoustic design/renovation costs. The results show that the GA simulations and the analytical models are compatible for the solutions without scattering properties.

1. INTRODUCTION

Acoustics of classrooms design is still neglected worldwide, even though it is essential to guarantee effective teaching and learning processes, especially at the baseline levels of the education [1]. As in other countries, also in Italy, poor acoustic quality is common in the educational panorama; there is lack of acoustic expertise in architects, engineers, school principals and teachers. Optimization techniques have rarely been used in this specific acoustic field or, in general, for acoustic design purposes compared to structural or form-finding ones. Starting from these considerations, investigations on acoustic and cost-effective solutions for classrooms have been proposed in this study. Results allow professionals to choose different optimization sets depending on the material or on the type of acoustic treatment they have in mind, and easily define the best solutions for a classroom or similar rooms, thus allowing promotion of awareness on the consequences of their choices since the early design phases.

2. METHOD

2.1 Parametric and acoustic models

A parametric model of a typical Italian classroom has been created in Grasshopper [2] and used as case-study. By using Grasshopper sliders, the existing room within a

virtual model has been developed. Side walls were identified by a number from 0 to 3 (Fig.1). The sliders allowed to change to room dimensions and the dimensions of windows, doors, walls and ceiling areas covered by acoustic panels, etc. (Fig.1).


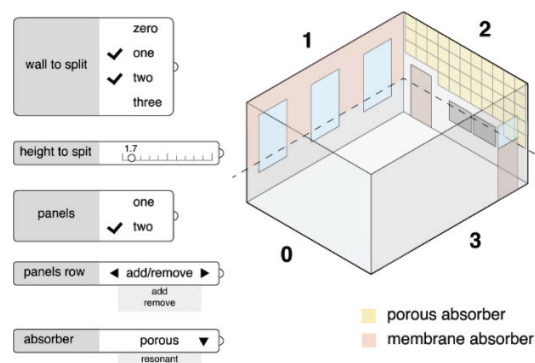


Fig. 1. Available GH slider for wall treatment.


Reverberation time (RT) and Speech Transmission Index (STI) are the acoustic descriptors chosen to characterize classroom acoustics. Ad-hoc Python [3] algorithms, which implemented Sabine and Eyring reverberation time equations and the Hopkins-Stryker formula for sound pressure level [4], with and without the Barron and Lee correction [5], have been implemented as baseline analytical models, and the GA software Pachyderm [6] has been used for simulations. The optimization process with analytical formulas also included the parametrization (and related optimization) of the sound absorption curves of acoustic materials, like porous absorbers, multiple resonators, membrane absorbers and baffles, starting from their physical and geometrical properties (Tab.1-4).

| parameter | treatment position | variability range |
|---------------|--------------------|-------------------|
| thickness - d | wall | 25 ÷ 50 mm |
| | ceiling | |
| air-gap - d' | wall | 0 ÷ 100mm |
| | ceiling | 0 ÷ hair-gap |


Tab. 1. Input-data range and sound absorption curve for porous absorbers.

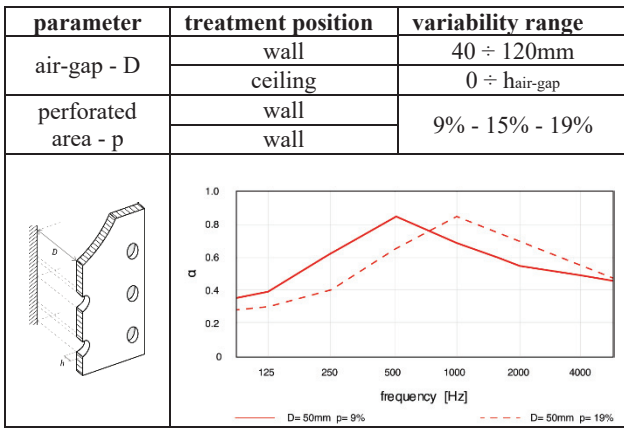

Tab. 2. Input-data range and sound absorption curve for resonant absorbers, $h=12.5\text{mm}$.

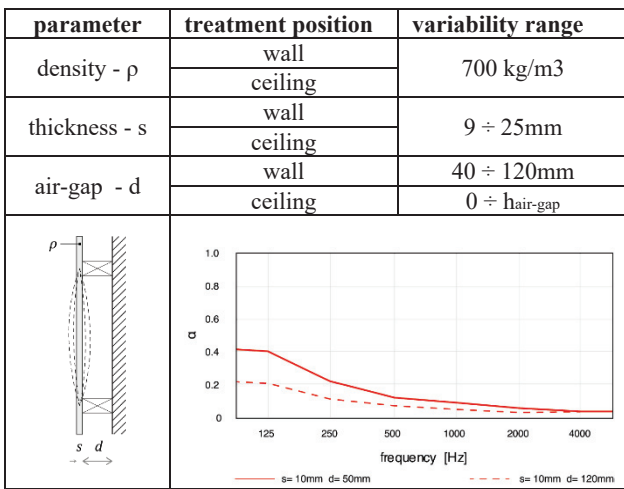

Tab. 3. Input-data range and sound absorption curve for membrane absorbers.

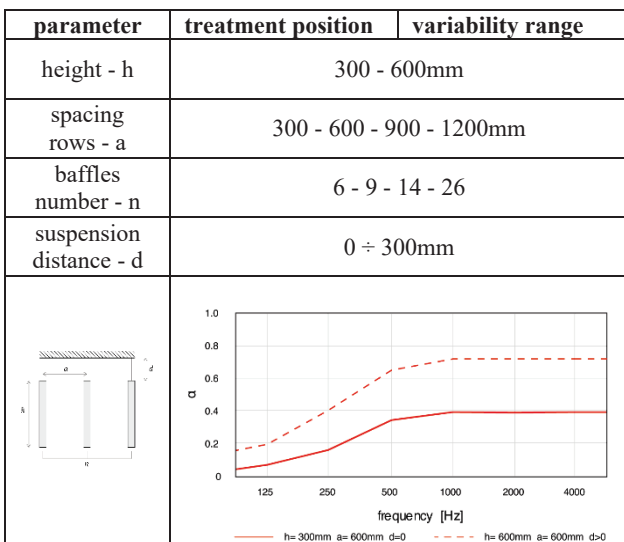

Tab. 4. Input-data range and sound absorption curve for baffle system.

The optimization process carried out with GA simulation takes into account the effect on results of the scattering

properties of surfaces [7] and of the different position of acoustic materials. In this case, absorption and scattering coefficients were not parametrized in Pachyderm and a database of acoustic materials, compatible with those available for models, has been provided to select materials suitable for the process.

2.2 Multi-objective optimization

The developed algorithms were coupled to Octopus plugin [8] and used to perform multi-objective optimization runs aiming to reach a tradeoff between acoustic performance and design costs. Octopus is an evolutionary simulator that can approach optimal solution sets through iterative tests and routines that are repeated many times. Unlike Grasshopper, it allows the flexibility to input multiple objectives instead of just one. Reverberation Time (RT) in octave bands from 0.125 to 4 kHz, Speech Transmission Index (STI) and the budget for acoustical treatment have been chosen as the objectives to optimize. Variables involved in the optimization procedure to achieve the aforementioned objectives, in the case of the analytical models, were the typology and the extension of the acoustic materials, as well as their acoustic absorption thanks to the optimization of their physical and geometrical characteristics. Particularly, the thickness of the porous layer, the thickness and density of the panel and air gap of the membrane absorbers, the holed percentage, the thickness of the massive layer and of the airgap of the resonant absorber, the geometry of the acoustic baffles. In the case of GA simulation, the optimization process included typology, extension and position of a list of acoustic materials, and also comprised sound scattering. All the runs were performed using the same experimental setup. A single source and a total of four receivers were placed in the room model at fixed positions according to the requirements of the UNI 11532 [9]. The settings within Octopus were mostly kept to their defaults, applying Hype reduction and mutation. Population size has been set to 30 instances per generation, which results in a total combined amount of over 1000 evaluated solutions.

3. RESULTS

The results show compatible acoustics for the analytical models and the GA simulations. However, significant differences in the calculation time were found. For the analytical models 1500 runs in about 2 hours was carried out, while 750 runs in about 20 hours were performed for the GA simulation. Tab. 5 shows statistics of performed optimizations in Octopus. Multi-objective optimizations have not a unique solution but have a set of optimal ones that represents the Pareto front [10]. Fig. 2 shows the Pareto front for the RT- STI - budget based optimizations for the three models. Results are quite similar for the two analytical models, while the GA algorithm shows a dispersion of solutions due to the low number of runs and the inclusion of the position of the acoustic materials in the optimization process.

| Octopus optimization | Sabine and Hopkins-Stryker | Eyring, Hopkins-Stryker, Barron and Lee | Pachyderm Acoustic |
|-----------------------------------------------|----------------------------|-----------------------------------------|--------------------|
| number of variables or genomes | 28 | 28 | 32 |
| number of objectives | 8 | 8 | 8 |
| total number of evaluated solutions | 1500 | 1500 | 750 |
| amount of completed generations | 30 | 30 | 15 |
| total runtime [h] | 1.4 | 1.8 | 20.8 |
| average evaluation time for each solution [s] | 3.4 | 4.3 | 100.1 |
| pareto optimal solutions in final gen. [%] | 78 | 89 | 33 |

Tab. 5. Statistics of performed optimizations.


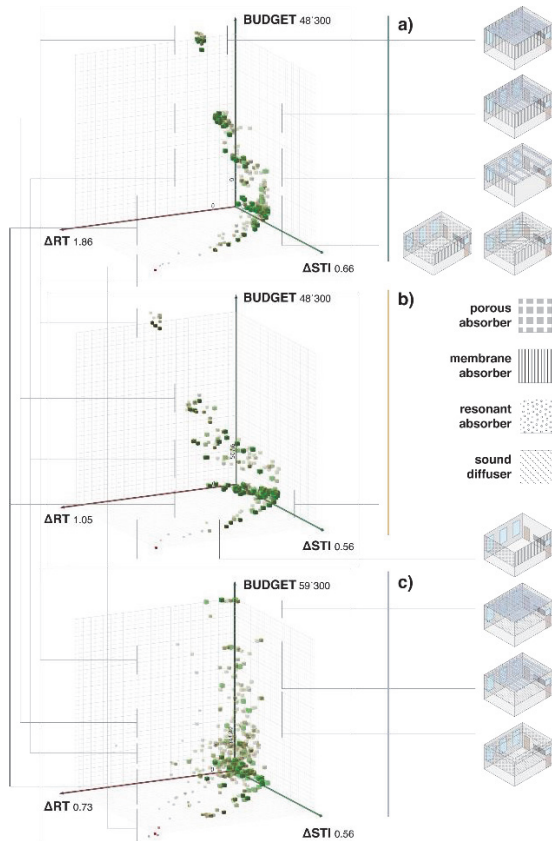



Fig. 2. Final generation of Pareto-front solutions from RT-STI-budget based optimizations: a) Sabine and Hopkins-Stryker formula, b) Eyring and Hopkins-Stryker formula with Barron and Lee correction, c) Pachyderm.

From a more detailed analysis of the Pareto front, valuable information can be obtained about the typology, position, and extension of the acoustic treatments of walls and ceiling. Figure 3 shows the results of this analysis for the best configurations found by performing the GA simulation. The most performative solutions, in the case of a ceiling acoustic treatment (Figure 3c), include baffles (8% of solutions), a totally sound-absorbing ceiling (AC100, 60%) or a sound-reflecting ceiling (RC100, 2%), a combination of sound-absorbing and sound-reflecting or sound-diffusing surfaces (AR-C, 30%). The reflective or scattering surface can be positioned above the teacher position (AR-CF, 75%) or in the center of the ceiling (AR-CC, 25%).

a) How many types of acoustic treatments on the walls?

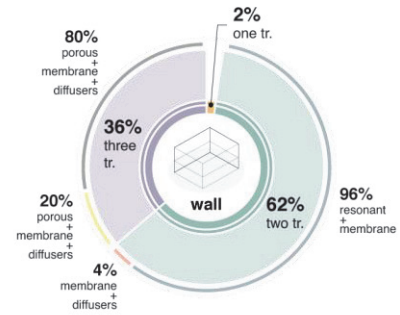

b) On how many walls do acoustic treatments extend?

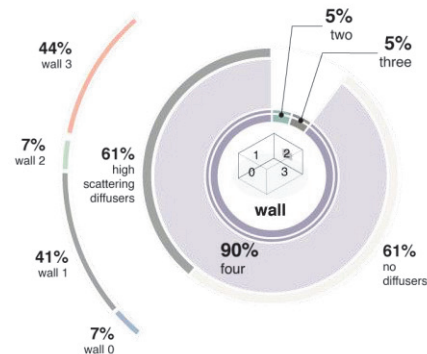

c) What are the typology of ceiling treatments?


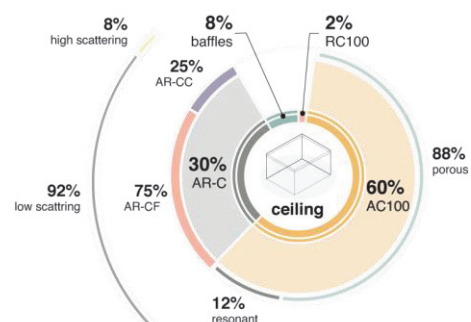


Fig. 3. Analysis of the best configurations performed by Pachyderm software.

The optimization was aimed to reach the optimal reverberation time of 0.6s, averaged across 250Hz to 2kHz, and to get the highest value of the average STI across for the measurement positions in the room. Fig. 4

shows the least expensive among the best configurations related to the different ceiling treatments, i.e. a totally sound-absorbing ceiling (AC100), a combination of sound-absorbing and sound-reflecting or sound-diffusing linings (AR-C) and baffles, for the GA model. Results in Fig.4(a, b, c) are comparable both in terms of RT and STI. A higher budget for the treatments shown in figure 4b and 4c compare the one in figure 4a is due to the high price of baffles and diffusers and does not lead to a significant improvement of the analyzed acoustic parameters.

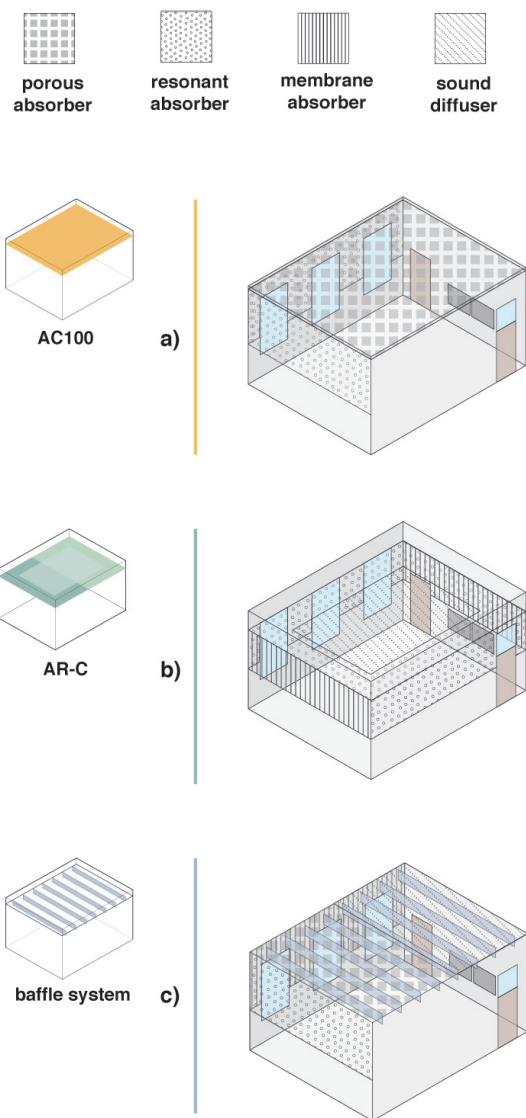

| ID configuration | RT _{0.25-2kHz} | STI | BUDGET |
|------------------|-------------------------|------|---------|
| a | 0.58s (0.04) | 0.69 | 4'300€ |
| b | 0.63s (0.02) | 0.65 | 10'300€ |
| c | 0.64s (0.06) | 0.65 | 15'500€ |

Fig. 4. Comparison among the least expensive among the best configurations related to the different ceiling treatments performed by the GA software Pachyderm.

4. CONCLUSION

Results from Pareto front show that some low-cost solutions are comparable among the three models, even though the most accurate should be considered GA simulation. Parametric optimization is far from trivial and though there is great interest in the potentials of parametric analysis, most practitioners in these fields tend not to be particularly well-versed in Grasshopper. So, further developments include a user-friendly interface to allow an easy approach for non-expert practitioners.

5. REFERENCES

- [1] A.Astolfi, G. E. Puglisi, et al., "Long-term vocal parameters of primary school teachers and classroom acoustics with and without an acoustical treatment", EAA, Krakow, 2014.
- [2] Grasshopper. Homepage: <https://www.rhino3d.com/it/6/new/grasshopper>
- [3] Python. Homepage: <https://www.python.org/>
- [4] UNI 11532-2:2020 [in Italian]: Caratteristiche acustiche interne di ambienti confinati - Metodi di progettazione e tecniche di valutazione - Settore scolastico.
- [5] A. Astolfi, V. Corrado, et al., "Comparison between measured and calculated parameters for the acoustical characterization of small classrooms", Appl. Acoust., 2008.
- [6] Pachyderm Acoustic Simulation. Homepage: <https://www.food4rhino.com/app/pachyderm-acoustical-simulation>
- [7] L. Shtrepi, "Investigation on the diffusive surface modeling detail in geometrical acoustics based simulations", J. Acoust. Soc. Am., vol. 145, 2019.
- [8] Octopus. Homepage: <https://www.food4rhino.com/app/octopus>
- [9] A.Astolfi, L. Parati, et al., "The New Italian standard UNI 11532 on acoustics for schools.", ICA, Aachen, 2019.
- [10] V. Pareto, "Manuale di Economia Politica", Società Editrice Libbraia, Milan, 1906.