

Influence of Slenderness on the Evaluation of Epistemic Uncertainty Related to Non-Linear Numerical Analysis of RC Columns

*Original*

Influence of Slenderness on the Evaluation of Epistemic Uncertainty Related to Non-Linear Numerical Analysis of RC Columns / Gino, Diego; Anerdi, Costanza; Bertagnoli, Gabriele; Giordano, Luca; Marano, GIUSEPPE CARLO. - In: IOP CONFERENCE SERIES: MATERIALS SCIENCE AND ENGINEERING. - ISSN 1757-899X. - ELETTRONICO. - 1203:(2021), pp. 1-9. (Intervento presentato al convegno 6th World Multidisciplinary Civil Engineering, Architecture: Urban Planning Symposium (WMCAUS 2021) tenutosi a Prague, Czech Republic nel 14th-18th June 2021) [10.1088/1757-899X/1203/3/032102].

*Availability:*

This version is available at: 11583/2978645 since: 2023-05-19T13:39:49Z

*Publisher:*

IOP Publishing

*Published*

DOI:10.1088/1757-899X/1203/3/032102

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)

PAPER • OPEN ACCESS

## Influence of Slenderness on the Evaluation of Epistemic Uncertainty Related to Non-Linear Numerical Analysis of RC Columns

To cite this article: Diego Gino *et al* 2021 *IOP Conf. Ser.: Mater. Sci. Eng.* **1203** 032102

View the [article online](#) for updates and enhancements.

You may also like

- [Stability of stationary strip non-linear surface waves](#)  
D Mihalache, D Mazilu, D -M Baboiu et al.
- [Metaheuristic algorithm approach to solve non-linear equations system with complex roots](#)  
A Kamsyakawuni, M P Sari, A Riski et al.
- [Non-linear Approximation for the Grain Charge Evolution](#)  
P Martín, J Puerta and E Castro



The Electrochemical Society  
Advancing solid state & electrochemical science & technology

243rd Meeting with SOFC-XVIII

Boston, MA • May 28 – June 2, 2023

Accelerate scientific discovery!

Learn More & Register



# Influence of Slenderness on the Evaluation of Epistemic Uncertainty Related to Non-Linear Numerical Analysis of RC Columns

Diego Gino<sup>1</sup>, Costanza Anerdi<sup>1</sup>, Gabriele Bertagnoli<sup>1</sup>, Luca Giordano<sup>1</sup>,  
Giuseppe Marano<sup>1</sup>

<sup>1</sup> Politecnico di Torino, Corso Duca degli Abruzzi, 10129, Turin, Italy

gabriele.bertagnoli@polito.it

**Abstract.** This investigation is devoted to quantify the epistemic uncertainty related to the non-linear analysis of reinforced concrete columns characterized by high slenderness using numerical codes. The adoption of refined numerical tools, which are able to consider both mechanical and geometric non linearities, implies to perform assumptions and approximations with respect to reality. With reference to reliability analysis, these simplifications lead, inevitably, to additional uncertainties which are of epistemic nature. In fact, these uncertainties may be reduced by the engineers/analysts by increasing the level of refinement of the numerical model and/or increasing knowledge about parameters associated to material models. However, also numerical model established by expert engineers/analysts are affected by this kind of epistemic uncertainty. Accepting that the level of uncertainty associated to the experimental tests set are minimized, the epistemic uncertainty associated to non-linear numerical simulations can be quantified characterizing the model uncertainty random variable comparing the outcomes of numerical results to the associated experimental ones. The present investigation proposes the quantification of the model uncertainty related to non-linear numerical simulations of slender RC columns. A total number of 40 experimental results known from literature are herein selected in coherence with current Eurocodes specifications. The experiments are reproduced adopting non-linear numerical analysis differentiating between several modelling hypotheses (i.e., numerical code; materials models). The comparison between experimental and numerical results is adopted to characterize the most suitable probabilistic model for the model uncertainty random variable associated to non-linear numerical simulations of RC columns subjected to significant slenderness. The outcomes of the research are useful to provide background to the characterization of partial safety factor for model uncertainty in non-linear numerical analysis using the approach of the global resistance format for safety verifications.

## 1. Introduction

The adoption of non-linear analysis (NLA) in the civil engineering field it is becoming common practice for designers, analysts and researchers [1]-[3]. The effect of non-linearities related to both material and geometric characteristics can be easily accounted for within the assessment or design of reinforced concrete (RC) members and structures, also with reference to seismic safety issues [4]-[8]. Moreover, the contribution of materials of different nature can be included within the analysis with the aim to estimate the overall structural resistance [9]-[10]. For instance, the quantification of the uncertainties associated to NLAs of RC structures and components is a relevant topic. In this framework, the characterization of the uncertainties of both epistemic and aleatory nature related to NLAs of RC




Content from this work may be used under the terms of the [Creative Commons Attribution 3.0 licence](https://creativecommons.org/licenses/by/3.0/). Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

structures have been widely investigated in the last years [11]-[16]. With reference to reliability analysis [17], the simplifications adopted within the definition of numerical models lead, inevitably, to additional uncertainties which are of epistemic nature. In particular, these uncertainties may be reduced by the engineers/analysts by increasing the level of refinement of the numerical model and/or increasing knowledge about parameters associated to material models. However, also numerical models established by expert engineers/analysts are affected by this kind of epistemic uncertainty. With reference to the mentioned above issues, the characterization and quantification of the model uncertainties (which can be classified as epistemic ones) associated to NLAs of RC members subjected to significant slenderness have not yet been carried out.

For instance, the present investigation proposes the quantification of the model uncertainty related to non-linear analysis of slender RC columns. A total number of 40 experimental results known from literature are herein selected in coherence with current Eurocodes specifications. The experiments are reproduced adopting non-linear numerical analysis differentiating between several modelling assumptions [13]-[14] (i.e., numerical code; materials models). Then, the comparison between experimental and numerical outcomes is adopted to characterize the probabilistic model for the model uncertainty random variable  $\vartheta$  associated to non-linear numerical simulations of RC columns subjected to significant slenderness ratio. The outcomes of the research are useful to provide background to the characterization of partial safety factor for model uncertainty in non-linear numerical analysis using the approach of the global resistance format for safety verifications [18].

## 2. Test cases and numerical modelling

In order to perform the quantification of modelling uncertainty for NLAs of reinforced concrete columns, the results of 40 laboratory tests realized according to different experimental campaigns [19]-[27] has been considered for comparison with the outcomes of appropriate numerical simulations. The set of experimental results has been selected in line to the provision and limitation of [28] with reference to geometry, detailing (i.e., shear reinforcements, reinforcement ratio  $\rho_l$ ) and material strengths (i.e., concrete cylinder compressive strength  $f_c$  and reinforcement yielding strength  $f_y$ ). The specifications of the tests set of slender RC columns selected for the investigation can be acknowledged in Table 1. The configuration of the laboratory tests [19]-[27] with reference to restraints and loading configuration is reported in Figure 1 differentiating between different types (i.e., A, B, C and D) of test set arrangement.

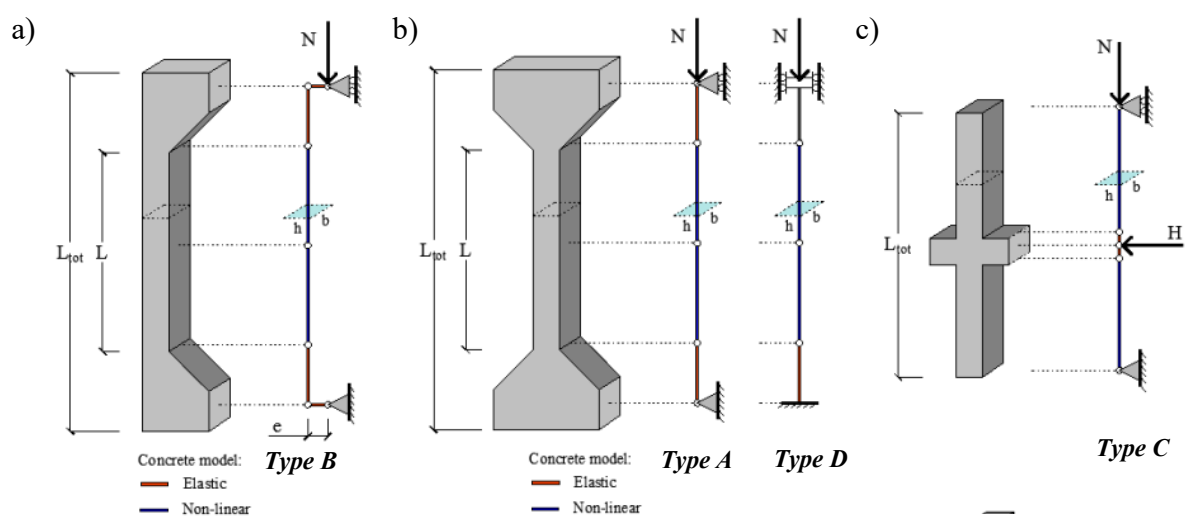

**Figure 1.** Test configuration for the different experimental investigations.

**Table 1.** Test cases considered for probabilistic calibration of model uncertainty with materials and geometrical properties, eccentricity of axial load  $e$  and experimental resistance  $R_{Test}$ .

Ref. [*]	Exp. test	Test set	$L_{tot}$ [mm]	$L$ [mm]	$b$ [mm]	$h$ [mm]	$\lambda$ [-]	$f_c$ [MPa]	$f_y$ [MPa]	$\rho = A_{sl}/A_c$ [%]	$e/h$ [mm]	$R_{Test}$ [kN]
[21]	2L20-30	B	1450	650	150	150	15	40.0	480.0	2.0	0.133	750.0
	2L20-60							43.0			0.133	700.0
	2L8-120R							56.0			0.053	1092.0
	4L8-30							43.0		4.1	0.053	1100.0
	4L20-120							40.0			0.133	900.0
	4L8-120R							56.0			0.053	1247.0
[24]	C000	A	680	600	120	120	17	27.0	347.2	4.0	-	559.6
	C020	B	1880	1800	120	180	52	27.6	355.0		0.200	327.3
	B020		3000	2920	120	180	56	31.0	360.9		0.200	271.5
	RL300		3000	2920	120	180	56	31.0	360.9		0.167	474.3
[25]	A-17-0.25	B	3400	2800	300	200	48	38.2	493.0	3.3		1181.4
	C-31.7-0.25		3800	3260	200	120	94	44.4	520.0	3.4	0.250	333.4
[19]	3.3	B	3400	2700	254	159	59	35.3	509.9	1.1	0.082	782.6
	5.1							40.6	426.8	3.1	0.165	735.5
	4.1		4500	3800	253	150	88	40.5	509.9	1.2	0.163	367.7
[26]	N30-10.5-	C	3300	2940	140	150	68	29.5	538.0	3.2		16.6
	C0-3-30											(280)* <sup>1</sup>
	H60-10.5-							58.5	531.0	1.4		17.2
	C0-1-30											(412)* <sup>1</sup>
[27]	III	A	3210	3000	140	140	74	16.1	294.2	1.4		343.2
	Va		3240	3000	178	140		26.4	281.8	1.6		684.5
	2		3230	3010	250	125	83	33.5	304.0	0.6		235.4
	I		3210	3000	200	100	104	15.2	294.2	1.6		264.8
	VI		3000		198	98	106	24.9	294.2			392.3
	15		6510	6310	247	161	136	33.0	294.2	0.8		549.2
	3	B	6510	6310	250	160	137	33.5	294.2			666.9
	8		3230	3010	250	126	83	20.4	304.0	0.6	0.200	235.4
	9							24.5	294.2			205.9
	12		6510	6310	250	162	135	29.7	294.2	0.8	0.300	112.8
	6				250	160	137	32.2	294.2		0.200	225.6
[20]	24D-2	D	2697	2697			104	20.8	247.5			198.4
	15E-2	A	3597	3597	127	90	139	20.1	247.5	2.5		161.0
[23]	S28	B	5000	5000			167	24.4	304.0			44.0
	S30				104	104		25.7	300.0	4.2	0.144	48.0
	S25		6000	6000			200	24.7	282.0			36.0
[22]	5	A	6004	6004	100	100	208	33.1	278.5	4.5		72.7
	6							35.6				72.2
	17A		4940	4940			225	25.8				31.9
	20		5327	5327			243	38.1				37.9
	18				76	76		38.2	300.4	5.4		33.9
	8							36.5				31.9
	7		6004	6004			274	39.3				29.9

(-)\*<sup>1</sup> Compressive axial load constantly applied to the RC column for the entire duration of the test.

As shown by Table 1, a significant range of slenderness values  $\lambda$  have been accounted for in order to perform comprehensive quantification of the model uncertainty and understand their influence in reliability analysis of slender RC structural components.

The 40 laboratory tests of [19]-[27] have been reproduced by means appropriate NLAs adopting nine different modelling assumptions according to the approach of [13]-[14]. In particular, the assumptions and decisions performed by the analysis during the definition of a specific numerical model (i.e., related to constitutive models, solution methods for non-linear system of equations, kinematic compatibility of displacements, type of finite elements with related formulation, convergence criteria) are able to affect the global level of uncertainty.

For instance, in this paper, the software ADINA [29], TNO DIANA [30] and OpenSees [31] have been adopted to perform NLAs of the 40 RC columns (denoted generally as program I, II, III). Moreover, 3 assumptions related to concrete tensile behavior have been adopted in line to [13]. Totally, 9 numerical models have been defined for each RC member selected from [19]-[27]. The models 1-3, 4-6 and 7-9 refers to the programs I, II and II, respectively, while, for each program, the first and the last models are related to elastic-brittle and plastic tensile behavior of concrete.

**Table 2.** Assumptions for numerical modelling of the tested RC slender components.

Program	I	II	III
Solution methods	<ul style="list-style-type: none"><li>- Method for solution of non-linear equations: full Newton-Raphson;</li><li>- Equilibrium of forces evaluated in each numerical iteration with reference to the deformed configuration (2<sup>nd</sup> order effects); maximum number of iterations: 100;</li><li>- Displacements-based criteria for convergence of load steps (tolerance between iterations to reach convergence 1%);</li><li>- Loading steps evaluated in line to laboratory loading sequence;</li></ul>		
	<ul style="list-style-type: none"><li>- 2 nodes 1D elements line to [29],[30] (force-based approach for fiber beams elements [31]);</li><li>- Mesh dimension determined in order to achieve stability of numerical solution;</li></ul>		
Constitutive relationships for materials	<i>Concrete:</i>		
	<ul style="list-style-type: none"><li>- Model for plane and confined concrete in compression defined with reference [32];</li><li>- Tensile behavior of concrete simulated with 3 hypotheses:<ul style="list-style-type: none"><li>1) Elastic – Brittle;</li><li>2) Elastic - linear tension softening (i.e., LTS);</li><li>3) Elastic – plastic;</li></ul></li></ul>		
	<i>Reinforcements:</i>		
	<ul style="list-style-type: none"><li>- Elastic – plastic with strength hardening;</li></ul>		
Other material properties (i.e., Young’s modulus, resistances, strains at failure, etc.) have been adopted according to [19]-[27] and in compliance to [28] in case of lack of data.			

In each numerical program (I, II, III), both geometrical and material non linearities has been defined including also the influence of confinement provided by stirrups [32]. The numerical simulations have been performed according to the tests loading sequence specified by the original references [19]-[27]. The details of the numerical models with the related assumptions (i.e., modelling assumptions) are summarized in Table 2.

### 3. Outcomes from NLAs and quantification of model uncertainty

This section reports the outcomes from the 360 NLAs performed on the 40 columns introduced above. The Table 3 summarize the results in terms of failure axial load with reference to experiments and the 9 numerical modelling assumptions.

**Table 3.** Ultimate resistance for RC columns with reference to modelling hypotheses 1-9.


Ref. [*]	Exp. test	Type	$\lambda$ [-]	$R_{Test}$ [kN]	$R_{NLA}$ [kN]								
					1	2	3	4	5	6	7	8	9
[21]	<b>2L20-30</b>	<i>B</i>	15	750.0	910.9	910.9	916.2	728.3	742.5	742.5	691.6	694.3	694.6
	<b>2L20-60</b>			700.0	978.8	978.8	985.5	734.8	735.8	744.0	736.4	736.4	739.5
	<b>2L8-120R</b>			1092.0	1587.0	1587.0	1587.0	1087.3	1090.9	1090.1	1152.7	1152.7	1152.7
	<b>4L8-30</b>			1100.0	1351.0	1351.0	1353.0	1110.9	1110.9	1110.9	1032.9	1032.9	1032.9
	<b>4L20-120</b>			900.0	1037.0	1037.0	1046.0	787.5	787.5	787.5	826.1	830.7	830.7
	<b>4L8-120R</b>			1247.0	1608.0	1608.0	1608.0	1211.3	1211.3	1211.3	1319.5	1319.5	1319.5
[24]	<b>C000</b>	<i>A</i>	17	559.6	611.6	611.6	611.6	545.1	545.1	545.1	560.6	560.6	560.6
	<b>C020</b>	<i>B</i>	52	327.3	396.0	396.0	402.9	319.9	336.9	338.0	325.7	328.5	329.0
	<b>B020</b>		56	271.5	298.6	298.6	308.6	219.2	227.2	227.2	257.0	263.7	263.7
	<b>RL300</b>		56	474.3	334.0	351.0	351.0	381.4	395.5	395.5	414.9	423.3	423.3
[25]	<b>A-17-0.25</b>	<i>B</i>	48	1181.4	1273.0	1273.0	1307.0	1322.1	1322.1	1346.4	1367.4	1367.4	1393.9
	<b>C-31.7-0.25</b>		94	333.4	207.4	219.6	219.6	224.8	262.8	262.8	248.4	280.1	280.1
[19]	<b>3.3</b>	<i>B</i>	59	782.6	827.3	827.3	835.9	787.5	787.5	809.4	856.4	856.4	866.5
	<b>5.1</b>		88	735.5	745.6	745.6	793.5	725.4	725.4	762.1	810.8	810.8	853.8
	<b>4.1</b>		88	367.7	297.7	346.8	346.8	210.9	403.0	403.0	397.5	391.7	455.7
[26]	<b>N30-10.5-C0-3-30</b>	<i>C</i>	68	16.6 (280)*1	11.6	11.9	11.9	23.5	23.5	24.6	16.2	16.6	17.6
	<b>H60-10.5-C0-1-30</b>			17.2 (412)*1	13.9	13.9	13.9	17.1	17.1	16.4	17.9	17.9	20.5
[27]	<b>III</b>	<i>A</i>	74	343.2	341.8	341.8	341.8	332.4	332.4	332.4	347.3	347.3	347.3
	<b>Va</b>		83	684.5	603.6	662.3	744.4	608.6	608.6	608.6	680.7	680.7	680.7
	<b>2</b>		104	235.4	197.4	217.7	217.7	191.2	224.5	224.5	216.2	236.8	247.3
	<b>I</b>		106	264.8	259.9	259.9	259.9	252.4	252.4	251.4	258.0	258.0	258.0
	<b>VI</b>		136	392.3	361.0	361.8	361.8	327.3	327.9	327.9	363.2	363.2	363.2
	<b>15</b>	<i>B</i>	137	549.2	509.4	509.4	509.4	394.4	394.4	394.4	560.3	560.3	560.3
	<b>3</b>		137	666.9	511.4	511.4	511.4	456.6	456.6	393.6	563.4	563.4	563.4
	<b>8</b>		83	235.4	197.4	217.7	217.7	191.2	224.5	224.5	216.2	236.8	247.3
	<b>9</b>		135	205.9	163.7	184.5	184.5	205.3	205.3	205.3	161.1	205.9	208.7
	<b>12</b>		137	112.8	153.5	153.5	172.5	114.7	114.7	151.5	115.2	112.2	176.8
[20]	<b>6</b>		137	225.6	185.7	204.1	204.1	153.4	223.2	223.2	187.4	227.6	244.0
	<b>24D-2</b>	<i>D</i>	104	198.4	184.6	184.6	184.6	188.0	192.1	192.1	192.8	192.8	192.8
[23]	<b>15E-2</b>	<i>A</i>	139	161.0	121.4	121.9	121.9	127.0	130.0	130.0	129.3	129.3	129.3
	<b>S28</b>	<i>B</i>	167	44.0	53.9	53.9	58.6	55.4	54.9	54.9	49.9	49.9	55.8
	<b>S30</b>		200	48.0	54.9	54.9	59.8	56.1	56.1	60.6	58.5	53.4	66.7
	<b>S25</b>		200	36.0	39.5	39.5	43.6	31.2	37.8	42.0	42.3	42.3	49.0
[22]	<b>5</b>	<i>A</i>	208	72.7	67.6	67.6	67.8	53.9	53.9	53.9	78.7	78.7	78.7
	<b>6</b>		208	72.2	70.3	70.3	70.6	52.0	52.0	52.0	82.3	82.3	82.3
	<b>17A</b>		225	31.9	32.7	32.7	32.8	20.1	26.0	24.1	37.1	37.1	37.1
	<b>20</b>		243	37.9	29.1	30.2	30.2	27.4	27.4	27.4	39.8	39.8	39.8
	<b>18</b>		243	33.9	29.1	30.2	30.2	24.4	24.4	24.4	39.8	39.8	39.8
	<b>8</b>		274	31.9	26.6	26.6	26.6	23.3	23.3	23.3	31.0	31.0	31.0
	<b>7</b>		274	29.9	27.6	27.6	27.6	20.6	20.6	20.6	32.3	32.3	32.3

(-)\*1 Compressive axial load constantly applied to the RC column for the entire duration of the test.

The outcomes from NLAs are useful to quantify the model uncertainty related simulation of response of slender reinforced concrete columns by means of comparison with experimental results. In line to [11],[13]-[14], the model uncertainty can be characterized addressing the following ratio:

$$\mathcal{G} = \frac{R_{Test}}{R_{NLA}} \quad (1)$$


where  $R_{Test}$  is the result from laboratory test and  $R_{NLA}$  is the related observed result from NLA performed with specific modelling assumption. The model uncertainty  $\mathcal{G}$  is able to quantify the level of epistemic uncertainty associated to definition of the NL numerical model and is useful to include such kind of uncertainty within reliability analysis of RC structures.

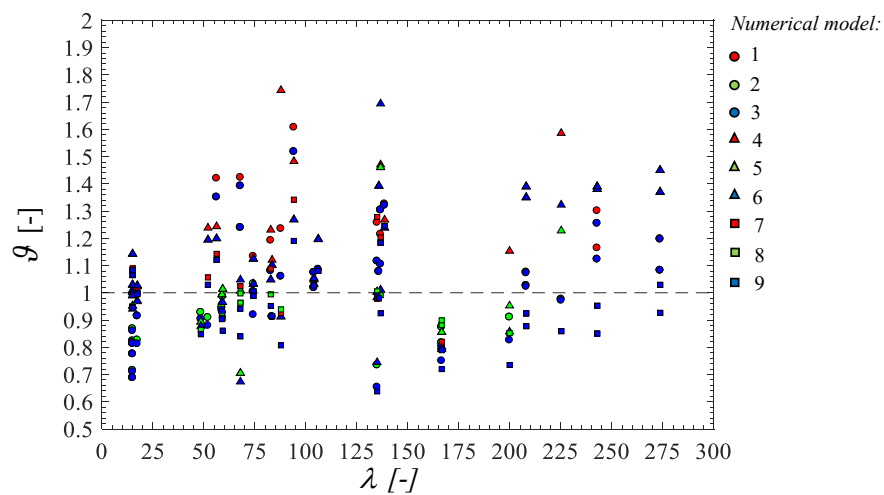

**Figure 2.** Summary of the ratios  $\mathcal{G} = R_{Test}/R_{NLA}$ .

#### 4. Statistical assessment

The observed outcomes of model uncertainty  $\mathcal{G}$  presented in previous section should be appropriately evaluated from statistical point of view. In particular, the results associated to each modelling assumption has been evaluated by means Chi-Square goodness of fit test verifying that the lognormal probabilistic model is the most likely in order to reproduce the statistical variability of the random variable  $\mathcal{G}$ , also in line to [33]. For instance, see the lognormal fit and related frequency histogram reported in Figure 3 for the modelling assumption number 3.

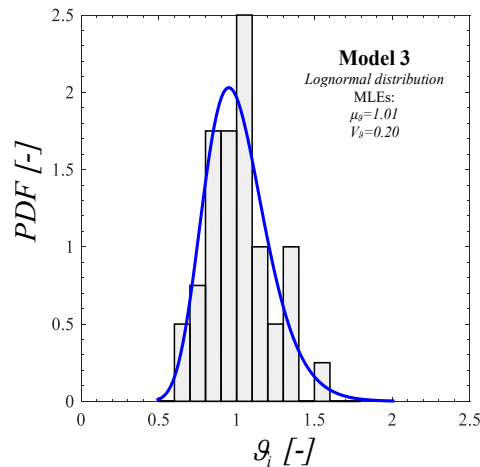

**Figure 3.** Relative frequency histogram and lognormal distribution PDF relate to the numerical model n°3.



The statistical parameters of lognormal probabilistic distribution for each modelling assumption has been evaluated using the maximum likelihood criteria [34] in order to minimize the statistical uncertainty in the estimates. The results in terms of mean value  $\mu_g$  and coefficient of variation  $V_g$  are reported in Table 4 with reference to the nine modelling assumptions.

**Table 4.** Results in terms of mean value and coefficient of variation of model uncertainty for the different modelling assumptions.

Structural Model	Statistical parameters	
	$\mu_g$ [-]	$V_g$ [-]
1	1.05	0.21
2	1.02	0.19
3	1.01	0.20
4	1.17	0.20
5	1.10	0.17
6	1.10	0.20
7	1.01	0.12
8	0.99	0.09
9	0.96	0.14

The results show that, in general, a slightly safe bias (i.e., mean value higher than 1.00) is present between the different assumptions while significant difference is present with respect to coefficient of variation that ranges between 0.09 and 0.21. In average, a value of 1.05 and 17% are recognised for the mean value  $\mu_g$  and the coefficient of variation  $V_g$ , respectively.

## 5. Conclusions

The present study proposes the characterization of the model uncertainty related to non-linear numerical simulation of reinforced concrete columns that are realized with high slenderness ratio. 40 RC columns experimentally tested has been selected from literature and reproduced by means 9 modelling assumptions performing mechanical and geometrical non-linear analysis. The comparison between the experimental and numerical results allows to determine mean value and coefficient of variation of the model uncertainty random variable that, in general, can be represented by a lognormal probabilistic model. In particular, the mean value equal to 1.05 and coefficient of variation equal to 0.15 has been determined averaging the outcomes from the different modelling assumptions. The results are useful to allow to take into account the model uncertainty variable within the reliability analysis of slender reinforced concrete columns and also to determine appropriate partial safety factors for safety formats based on semi-probabilistic methods.

## Acknowledgment(s)

This work relates to the activity developed by the authors within the Commission 3 – Task Group 3.1: “Reliability and safety evaluation: full-probabilistic and semi-probabilistic methods for existing structures” of the International Federation for Structural Concrete (*fib*).

## References

- [1] *fib* Bulletin N°45: Practitioner's guide to finite element modelling of reinforced concrete structures – State of the art report, Lausanne, 2008.
- [2] P. Castaldo, G. Alfano, "Seismic reliability-based design of hardening and softening structures isolated by double concave sliding devices", *Soil Dynamics and Earthquake Engineering*, vol. 129, 105930, 2020.
- [3] P. Castaldo, B. Palazzo, T. Ferrentino, "Seismic reliability-based ductility demand evaluation for inelastic base-isolated structures with friction pendulum devices", *Earthquake Engineering and Structural Dynamics*, vol. 46(8), pp. 1245–1266, 2017.
- [4] P. Castaldo, E. Tubaldi, F. Selvi, L. Gioiella, "Seismic performance of an existing RC structure retrofitted with buckling restrained braces", *Journal of Building Engineering*, vol. 33, 101688, 2021.
- [5] P. Castaldo, M. De Iuliis, "Optimal integrated seismic design of structural and viscoelastic bracing-damper systems", *Earthquake Engineering and Structural Dynamics*, vol. 43(12), pp. 1809–1827, 2014.
- [6] P. Castaldo, B. Palazzo, T. Ferrentino, G. Petrone, "Influence of the strength reduction factor on the seismic reliability of structures with FPS considering intermediate PGA/PGV ratios", *Composites Part B: Engineering*, vol. 115, pp. 308–315, 2017.
- [7] P. Castaldo, M. Ripani, R. L. Priore, "Influence of soil conditions on the optimal sliding friction coefficient for isolated bridges", *Soil Dynamics and Earthquake Engineering*, vol. 111, pp. 131–148, 2018.
- [8] P. Castaldo, B. Palazzo, F. Perri, "Fem simulations of a new hysteretic damper: The dissipative column", *Ingegneria Sismica*, vol. 33(1), pp. 34–45, 2016.
- [9] P. Castaldo, E. Nistri, V. Piluso, "Ultimate behaviour of RHS temper T6 aluminium alloy beams subjected to non-uniform bending: Parametric analysis", *Thin-Walled Structures*, vol. 115, pp. 129–141, 2017.
- [10] P. Castaldo, E. Nistri, V. Piluso, "FEM simulations and rotation capacity evaluation for RHS temper T4 aluminium alloy beams", *Composites Part B: Engineering*, vol. 115, pp. 124–137, 2017.
- [11] M. Engen, M. A. N. Hendrik, J. Köhler, J. A. Øverli, E. Åldtstedt, "A quantification of modelling uncertainty for non-linear finite element analysis of large concrete structures", *Structural Safety*, vol. 64, pp. 1–8, 2017.
- [12] D. Gino, G. Bertagnoli, D. La Mazza, G. Mancini, "A quantification of model uncertainties in NLFEA of R.C. shear walls subjected to repeated loading", *Ingegneria Sismica*, Anno XXXIV Special Issue, pp. 79–91, 2017.
- [13] P. Castaldo, D. Gino, G. Bertagnoli, G. Mancini, "Partial safety factor for resistance model uncertainties in 2D non-linear analysis of reinforced concrete structures", *Engineering Structures*, vol. 176, pp. 746–762, 2017, <https://doi.org/10.1016/j.engstruct.2018.09.041>.
- [14] P. Castaldo, D. Gino, G. Bertagnoli, G. Mancini, "Resistance model uncertainty in non-linear finite element analyses of cyclically loaded reinforced concrete systems", *Engineering Structures*, vol. 211, 2020, 110496, <https://doi.org/10.1016/j.engstruct.2020.110496>.
- [15] M. Sykora, M. Holicky, "Safety Format for Non-linear Analysis in the Model Code –Verification of Reliability Level" *Proceeding of fib Symposium on Concrete Engineering for excellence and efficiency*, Prague, Czech Concrete Society, pp. 943–946, 2011.
- [16] V. Cervenka, "Global safety formats in fib Model Code 2010 for design of concrete structures", *Proceedings of the 11th Probabilistic Workshop*, Brno, 2013.
- [17] G. Mancini, V. I. Carbone, G. Bertagnoli, D. Gino, "Reliability-based evaluation of bond strength for tensed lapped joints and anchorages in new and existing reinforced concrete structures",

- Structural Concrete*, vol. 19(3), pp. 904–917, 2018, <https://doi.org/10.1002/suco.201700082>.
- [18] *fib* Model Code for Concrete Structures 2010, *fib*, Lausanne, 2013.
  - [19] A. Mehmél, H. Schwarz, K. H. Karperek, J. Makovi, “Tragverhalten ausmittig beanspruchter stahlbetondruckglieder”, *institut für baustatik, eht, deutscherausschuss für stahlbeton*, heft 204, 1969.
  - [20] P. Luis, P. Saenz, I. Martin, “Test of reinforced concrete columns with high slenderness ratios”, *In Journal Proceedings*, vol. 60, pp. 589–616, 1963.
  - [21] S. J. Foster M. Attard, “Experimental tests on eccentrically loaded high strength concrete columns”, *Structural Journal*, vol. 94(3), pp. 295–303, 1997.
  - [22] V. R. Pancholi, “The Instability of Slender Reinforced Concrete Columns”, *PhD thesis*, University of Bradford, 1977.
  - [23] A. Dracos, “Long slender reinforced concrete columns”, *PhD thesis*, University of Bradford, 1982.
  - [24] S. IwaiI, K. Minami, M. Wakabayashi, “Stability of slender reinforced concrete columns subjected to biaxially eccentric loads”, 1986.
  - [25] P. H. Chuang, F. K. Kong, “Large-scale tests on slender, reinforced concrete columns”, *Structural Engineer*, vol. 75(23), pp. 410–16, 1997.
  - [26] A. C. Barrera, J. L. Bonet, M. L. Romero, P. F. Miguel, “Experimental tests of slender reinforced concrete columns under combined axial load and lateral force”, *Engineering Structures*, vol. 33(12), pp. 3676–3689, 2011.
  - [27] O. Baumann, “Die Knickung der Eisenbeton-Säulen”, *PhD thesis*, ETH Zurich, 1935.
  - [28] CEN. EN 1992-1-1: Eurocode 2 – Design of concrete structures. Part 1-1: general rules and rules for buildings, *CEN 2014*, Brussels, 2014.
  - [29] ADINA R & D. Inc.. 71 Elton Avenue Watertown, MA 02472, USA, 2014.
  - [30] DIANA FEA BV. Delftechpark 19a 2628 XJ Delft, The Netherlands, 2017.
  - [31] F. McKenna, G. L. Fenves, M. H. Scott, “Open system for earthquake engineering simulation”, University of California, Berkeley, CA, 2000.
  - [32] M. Saatcioglu, S. R. Razvi, “Strength and ductility of confined concrete”, *Journal of Structural engineering*, vol. 118(6), pp. 1590–1607, 1992.
  - [33] JCSS, JCSS Probabilistic Model Code, 2001.
  - [34] M. H. Faber, *Statistics and Probability Theory*, Springer, 2012.