

Networking Assessment of ROADM Architecture based on Photonics Integrated WSS for 800G Multi-band Optical Transport

*Original*

Networking Assessment of ROADM Architecture based on Photonics Integrated WSS for 800G Multi-band Optical Transport / Masood, MUHAMMAD UMAR; Tunesi, Lorenzo; Khan, Ihtesham; Bruno, Correia; SADEGHI YAMCHI, Rasoul; Ghillino, Enrico; Bardella, Paolo; Carena, Andrea; Curri, Vittorio. - In: JOURNAL OF OPTICAL COMMUNICATIONS AND NETWORKING. - ISSN 1943-0620. - ELETTRONICO. - 15:10(2023), pp. E51-E62. [10.1364/JOCN.489754]

*Availability:*

This version is available at: 11583/2979434 since: 2023-06-19T09:31:29Z

*Publisher:*

Optica

*Published*

DOI:10.1364/JOCN.489754

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

Optica Publishing Group (formely OSA) postprint/Author's Accepted Manuscript

“© 2023 Optica Publishing Group. One print or electronic copy may be made for personal use only. Systematic reproduction and distribution, duplication of any material in this paper for a fee or for commercial purposes, or modifications of the content of this paper are prohibited.”

(Article begins on next page)

# Networking Assessment of ROADM Architecture based on Photonics Integrated WSS for 800G Multi-band Optical Transport [Invited]

MUHAMMAD UMAR MASOOD<sup>1</sup>, LORENZO TUNESI<sup>1</sup>, IHTESHAM KHAN<sup>1</sup>, BRUNO CORREIA<sup>1</sup>, RASOUL SADEGHI<sup>1</sup>, ENRICO GHILLINO<sup>2</sup>, PAOLO BARDELLA<sup>1</sup>, ANDREA CARENA<sup>1</sup>, AND VITTORIO CURRI<sup>1</sup>

<sup>1</sup>DET, Politecnico di Torino, Corso Duca degli Abruzzi, 24, 10129, Torino, Italy

<sup>2</sup>Synopsys, Inc., 400 Executive Blvd Ste 101, Ossining, NY 10562, United States

\* Corresponding author: muhammad.masood@polito.it

Compiled June 19, 2023

The capacity of the optical transport network must be expanded to support the increasing demand due to bandwidth-intensive applications. Multiband transmission solutions can achieve this goal by exploiting the low loss optical spectrum windows while maintaining the same existing fiber infrastructure, increasing the network's capacity, and minimizing the operator capital expenditure (CAPEX) by limiting the need for a new fiber deployment. In the context of multi-band transmission, this work proposes a novel Reconfigurable-Optical-Add-Drop-Multiplexer (ROADM) architecture using a modular photonic integrated multi-band Wavelength-Selective-Switch (WSS) that operates over multi-bands (S+C+L). This study focuses on conducting a comprehensive network performance analysis of different settings, enabling operation from 400G up to 800G using the proposed multi-band WSS on two real network topologies: German and Italian. The results provide the potential benefits of transitioning from traditional C-band transmission to multi-band transmission based on overall network performance. © 2023 Optica Publishing Group

<http://dx.doi.org/10.1364/ao.XX.XXXXXX>


## 1. INTRODUCTION

It is estimated that global Internet traffic is projected to grow at a Compound Annual Growth Rate (CAGR) of 30% [1]. The introduction of 5G technology is expected to increase wireless network capacity substantially; to support this increase, all other network segments will require optical transmission over fiber infrastructures. To meet this growing demand, network operators must develop cost-effective, scalable, and flexible strategies to increase the capacity of their existing infrastructure. These efforts are essential to ensure the reliable and efficient operation of the Internet in the future. The current state-of-the-art Wavelength Division Multiplexing (WDM) optical infrastructure takes advantage of the C band, which has a bandwidth of 4.8 THz, as a transmitting window from long-haul/submarine to urban networks. By employing a preferred polarization multiplexed rectangular 16-ary quadrature amplitude modulation (PM-16QAM) scheme, this technique allows data transfer rates of around 30 Tbps per fiber. It is important to consider that the installation of new fiber to increase capacity can result in high costs, particularly in situations where fiber resources are limited [2]. Within this context, multi-band transmission, defined as transmitting data through a broader range of low-loss opti-

cal fiber spectral bandwidths, presents a favorable solution to improve network capacity and effectively repurposing existing fiber infrastructure.

However, the incorporation of components outside of the C-band spectrum can increase network costs, especially amplifiers that are potentially expensive, but this can minimize the need for a new fiber infrastructure. Moreover, Stimulated Raman Scattering (SRS) can lead to degradation and imbalanced transmission quality across multiple bands, negatively impacting network capacity, particularly on larger networks. Hence, conducting a thorough analysis of the advantages of incorporating multi-band network components in a multi-band transmission system versus single-band transmission is decisive to evaluate the overall performance of the network.


In this framework, there are two possible approaches to increase the capacity of the optical network infrastructure: Spatial Division Multiplexing (SDM), which can be deployed with Multicore (MCF), Multimode (MMF), or Multiparallel (MPF) fibers, and Band Division Multiplexing (BDM), which involves using a broader spectrum of optical fibers to enable low-loss transmission (e.g., 54 THz in ITU G.652.D fibers). However, SDM solutions such as MCF and MMF can improve transmission capacity but require a complete transformation of the optical

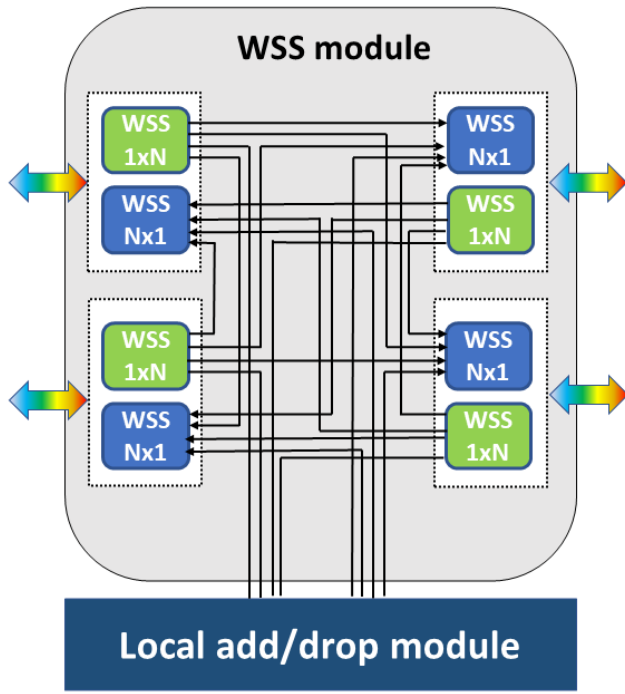

**Fig. 1.** ROADM architecture enabled by multiple WSS modules.

transport ecosystem, including new fibers and devices. On the other hand, BDM, which does not require the deployment of extra optical fibers, is the most feasible immediate option to increase the capacity of the optical network. Although optical amplification is the main issue with the BDM system, there are already several widely available prototype amplifiers that work in the extended spectrum region [3]. Transparent wavelength routing in BDM also needs filtering and switching components to be available. The first move towards putting the BDM approach into practice is the introduction of filtering and switching components. The network component such as WSS is vital because it offers autonomous management and routing of each input channel to a fiber output of the WDM comb. WSS systems are generally constructed using complex and bulky technologies like Liquid Crystal on Silicon (LCoS) and Microelectromechanical Systems (MEMS) [4].

The current study suggests a multi-band WSS implementation utilizing Photonic Integrated Circuits (PICs) technology. This approach contrasts existing bulky WSS systems based on MEMS and LCoS technologies. The proposed WSS has a modular design that can operate in a broad optical spectrum, including the C+L+S bands. It offers scalability to accommodate additional output fibers and channels with a smaller footprint than traditional MEMS-based solutions. The analysis only focuses on the switching functionality of the WSS module without considering the local add/drop module of the ROADM, as shown in Fig. 1. A preliminary network performance analysis of the proposed multi-band modular WSS is performed by operating it on a symbol rate of  $R_s = 60$  GBaud and Free spectral range (FSR) = 100 GHz WDM comb to enable 400G transmission [5]. This study begins by proposing the redesign of the WSS to support 800G transmission with FSR = 150 GHz and  $R_s = 120$  GBaud and then evaluate its detailed performance considering two different topologies: Italian and German networks. Furthermore, the performance comparison of transparent and

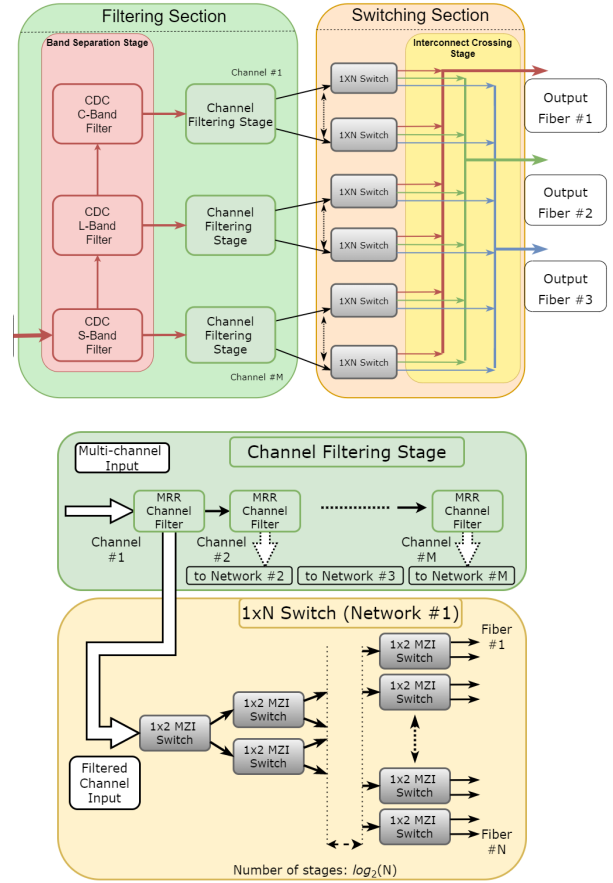


**Fig. 2.** Circuit model of the proposed WSS structure, highlighting the main operational stages and their block structure.

translucent networks is also presented for different network configurations. Finally, a detailed comparison has also been made in terms of traffic and channel allocation for multi-band transmission with respect to widely deployed single-band transmission systems.

The remaining of the paper is organized as follows. In Sec. 2, the proposed architecture of WSS is described. In Sec. 3, the WDM transport layer details are briefly described, and the Optical Signal-to-Noise Ratio (OSNR) penalty of the proposed WSS is discussed for different symbol rates. Next, in Sec. 4, the network layer details are reported along with a broad description of the tool used for the network performance analysis. Sec. 5 describes the network performance results considering different transceivers, transparent and translucent networks, and the SDM vs. BDM network configuration comparison. Finally, the conclusion of the article is stated in Sec. 6.

## 2. WAVELENGTH SELECTIVE SWITCH ARCHITECTURE

The ROADM under analysis is based on a photonic integrated WSS, enabling Dense Wavelength Division Multiplexing (DWDM) over a multi-band scenario. The underlying design principles of the PIC have been chosen to allow modularity and scalability of the structure, allowing the architecture to be adapted and simulated for various applications, envisioning different amounts of ports, channels, and spectral characteristics. This is achieved through a "divide and conquer" approach,

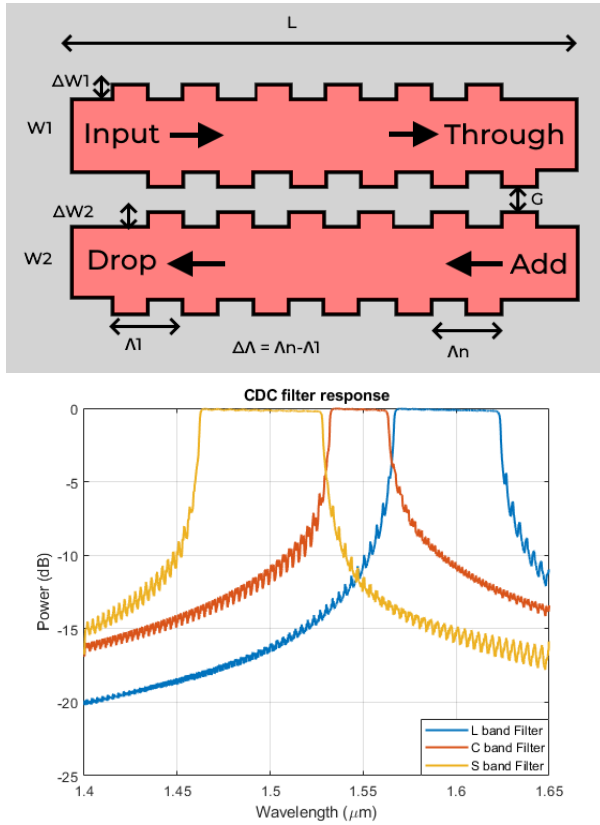

**Fig. 3.** Contra-Directional Coupler filter: (top) schematic and (bottom) frequency response.

splitting the demultiplexing and switching operations into separate sections while implementing the required functionalities through cascades of simpler integrated components.

The main results and the responses of the components are highlighted for a target application in the S+C+L bands, with channel spacing of FSR= 100 GHz: the following network analysis also considers a case with FSR= 150 GHz, although the same design principles and simulation steps are upheld. The device architecture is depicted in Fig. 2, which highlights both the general structure, the filtering cascade, and the switching network structures [6]. The response of the components has been simulated by analytical means or circuit block-based solutions, using the Synopsys Optsim simulation platform to evaluate the overall WSS performances.

#### A. Filtering section

This first section is tasked with demultiplexing the input signal into its channels, separating each into a separate waveguide while introducing minimal losses and crosstalk effects. This operation is achieved through a multistage cascaded filtering structure, which starts by separating the main bands of operations (S+C+L in the scenario under analysis) before moving to a finer filtering resolution; this stage is fundamental in both limiting the losses by reducing the following filtering cascade, as well as reducing the inter-band crosstalk, allowing the optimized design of the following components for the required band of operation. After this initial division, each spectral sub-region is demultiplexed by a filtering element cascade. Two main devices accomplish this operation: Contra-Directional Couplers (CDCs) for the band separation and Micro-Ring Resonator (MRR) based

filters for the channel demux.

These two elements achieve their wavelength filtering capabilities through different operating principles and are therefore suited for different tasks. CDCs operating principle is based on the engineering of their gratings, which allows coupling of the forward propagating mode of the first waveguide to the backward propagating mode of the second waveguide. Their main design parameters, highlighted in Fig. 3, are the waveguides and gratings geometry: by tuning the waveguide unperturbed effective index (through width  $W_{1,2}$  and height) and the perturbed one ( $\Delta W_{1,2}$ ) together with the gap  $G$ , we can suppress direct coupling and maximize the contra-directional effect. Through proper engineering of the grating periodicity ( $\Lambda_{1,n}$ ) we can tune the effect for certain bandwidths and central frequencies.


MRRs work instead on a simpler interference principle: during the round-trip in the ring structure, only certain frequencies will experience constructive interference, and as such this element can couple selective wavelengths to a second waveguide while leaving the rest of the band unchanged. Single-ring structures have unsatisfactory properties with respect to transmitted spectra flatness and stop-band attenuation, although the combination of them in more complex structures can compensate for these effects, as shown in Fig. 4. The design of these structures is mainly affected by two groups of parameters, namely the coupling coefficients between the elements ( $K_{11,12,21,22}$ ) and the radius of the rings  $R$ : by tuning the radii, we can select the target channel, while the coupling coefficients are responsible for the shape of the overall frequency response.

Due to their different operating principle, CDCs and MRRs are suitable for slightly different applications. The CDC structures are ideal for separating the central region of operation due to their flat-top wide-band properties and sharp stop-band transitions: even though they require a larger foot-print with respect to other filtering solutions, they can be tailored to cover ultra wide-band of operation [7], making them fundamental building blocks for multi-band applications. On the other hand, MRRs, which are used for channel separation, represent one of the standard integrated solutions for add-drop filtering systems, although they are more suited to channel filtering and cannot achieve ultra-wide filtering bandwidths.

In the proposed architecture, each channel is filtered by a two-stage ladder MRR filter [8]: this configuration allows a flat-top response, with a sharp stop-band transition and high extinction ratio, ideal for minimizing the inter-channel crosstalk and reducing the transmission penalties. To mitigate the issue of aliasing of MRR-based solutions, the devices have been designed and simulated considering more complex grating-assisted coupling structures [9]: these couplers allow for the reduction of the number of filtering elements needed, as additional antialiasing elements are not required unlike in previously reported implementations [5]. This change allows more precise wavelength-dependent engineering of the coupling value, which can compensate for the intrinsic period nature of the response of MRR based device: as depicted in the device frequency response, an FSR-free element can be engineered, which does not introduce channel aliasing. After the demux operation, the following section is specific for routing the signals toward the target output port.

#### B. Switching section

In order to completely avoid contention, the routing is achieved through parallel independent switching networks, with each handling an individual channel and propagating it to the target egress port.

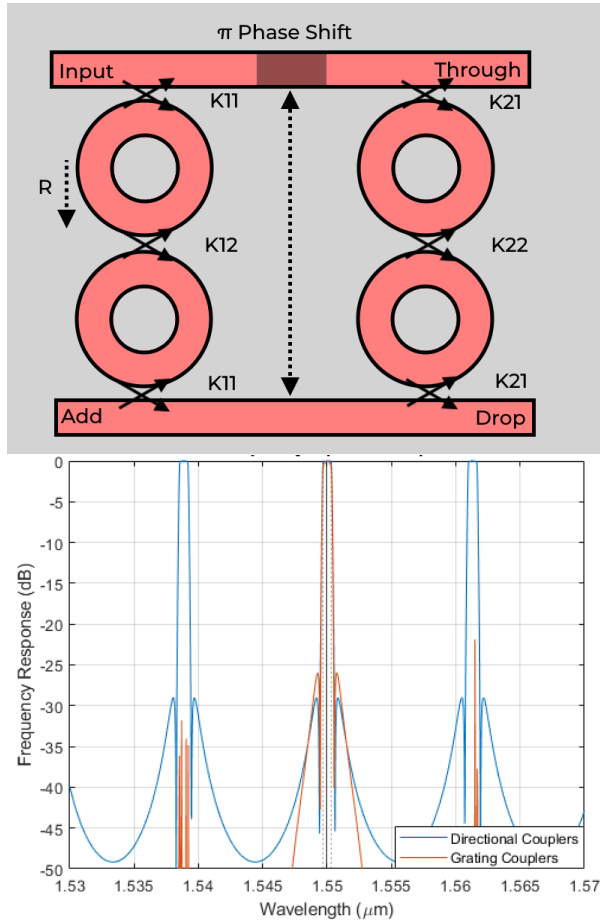


**Fig. 4.** Device schematic for the two-stage ladder MRR filter. The frequency response is shown for the individual device together with the proposed anti-aliasing solution.

These networks are implemented as  $1 \times N$  binary tree switches, comprised of  $N-1$   $1 \times 2$  Optical Switching Elements (OSEs), as depicted in the general architecture (Fig. 2). This solution has been chosen instead of a more traditional  $M \times N$  crossbar switch as it maintains the same connectivity and routing capabilities while reducing the number of elements and allowing for a more flexible design. While in traditional crossbar structures, the switches must be compatible with all input signals; using parallel independent switching networks, each sub-module can be optimally designed for the expected frequency of operation.

The OSE has been modeled as a Mach-Zehnder Interferometer (MZI) switch, as shown in Fig. 5. MZIs are a standard integrated solution for thermal and MEMS-controlled switching structures, as they can be easily implemented and provide a relatively flat wide frequency response, ideal for frequency-independent switching [10–12]. The design of the MZI is relatively straightforward, with the coupling length  $L_c$  and the gap  $G$  chosen to create 3 dB coupling regions for the wavelength of interest, while thermal control allows the introduction of a  $\pi$  phase shift, which changes the output from the through to the drop port. In our simulation, we envisioned a thermal control strategy, but the use of alternative control schemes does not lead to significant functionality differences.

The active routing section terminates with the switches. The last part of the structure comprises passive waveguide crossings

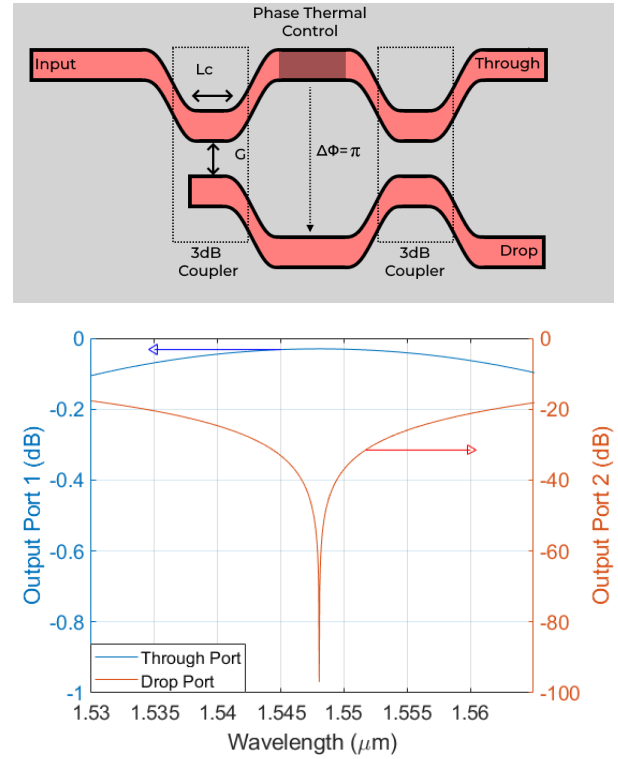

**Fig. 5.**  $1 \times 2$  Mach-Zehnder Interferometer Switch: (top) schematic and (bottom) frequency response.


and wavelength combiners to bring all the connections to the target output port, as depicted in Fig. 6. These structures have been modeled as passive lossy elements, considering reference values from the literature for experimental and state-of-the-art devices for crossings [13–15] and integrated wavelength combiners [16, 17].

### 3. WDM TRANSPORT LAYER

Having defined all the relevant components and the general architecture, to assess the proposed architecture's network effect, the transmission impairments and effects must be evaluated in a Digital Signal Processing (DSP)-aware simulation platform, allowing the characterization of the component. With respect to standard frequency response evaluation, which only addresses the insertion loss and qualitative shaping of a broadband signal, this simulation process is able to extract the impairment of the device by considering symbol transmission under a defined modulation format and telecom scenario: this method can characterize the Bit-error Rate or Symbol-error Rate introduced by the device under test.

Two main coherent transmission scenarios are considered, using a 16-QAM modulation format with a symbol rate of  $R_s = 60$  GBaud over a  $FSR = 100$  GHz WDM comb in the first case, and  $R_s = 120$  GBaud over a  $FSR = 150$  GHz WDM comb for the second one. The relevant components (filters and switching elements) have been designed for the two applications following the same principles to minimize the crosstalk and penalties. The device is then simulated in the Optisim<sup>®</sup> Photonic Circuit Simulation Suite: while the transmitter and receiver modules are implemented through the Suite library, each circuit component has been implemented based on the frequency response extracted from the device simulations, using a wide




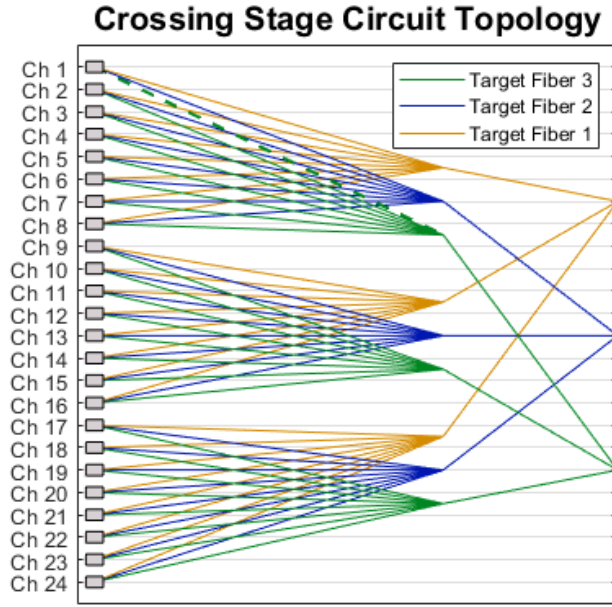

**Fig. 6.** Interconnect stage topology for a 24 channels device with 3 target output ports.

range of techniques, from Beam Propagation Method (BPM), Finite-Difference Time-Domain (FDTD), Coupled Mode Theory (CMT), and analytical models. The OSNR penalty ( $\Delta\text{OSNR}$ ) has been chosen as the QoT metric, evaluated for a target Bit-Error Rate  $\text{BER} = 10^{-3}$ . For the proposed structure, two main contributions of the penalty can be highlighted: the path-dependent penalty, due to the crossing interconnect stage, and the path-independent effects, due to the fixed filtering and switching elements. For our analysis, the response of the components has been otherwise normalized apart from the two effects, focusing on the QoT impairment and assuming the ideal recovery of the insertion losses.

The DSP simulations are executed for a 24 channels  $1 \times 3$  WSS, extracting the  $\Delta\text{OSNR}$  for all possible routing configurations in both the 60 Gbaud and 120 Gbaud case. The path-dependent or routing penalty can be highlighted by displaying the data as a function of the number of waveguide crossings encountered, as shown in Fig. 7. The average penalties are depicted for both cases and show compatible results for the two transmission scenarios: the fluctuations are justified by the probabilistic nature of the BER simulations, which can lead to slight discrepancies in the average value due to spurious results. Based on these simulation results, a general prediction model can be built to arbitrarily increase the cardinality of the WSS, i.e. the number of input channels and output fibers, relying on the path-dependent penalty estimation and the extrapolation of the data linearity. By evaluating the crossing topology for a target  $M$  channels  $1 \times N$  WSS and adjusting for the cascading effects of the components, the penalty can be predicted for any routing configuration, allowing larger-scale simulations based on a reduced data set. This expansion of the original simulation data accounts for both the filtering penalties introduced by the WSS device, which are based on the cascaded effect of the normalized components, while an additional path-dependent loss is considered due to the larger topology of the multiplexing section. The insertion losses of the de-multiplexing and switching stage are considered

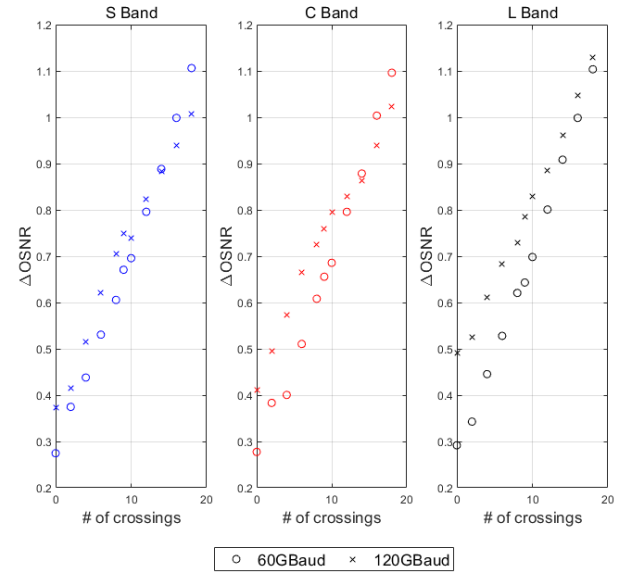

**Fig. 7.**  $\Delta\text{OSNR}$  penalty distribution for tested channel comparing the 60 Gbaud and the 120 Gbaud performance.

compensated due to their fixed nature, which is not affected by the routing configuration of the device.


The topology-based expansion of the model is necessary due to the computational cost of the DSP-enabled simulations: as the device scales up, this analysis becomes prohibitive in both required resources and computational time, as such the mathematical extrapolation of the data poses a good trade-off, using the smaller footprint results to estimate the device behavior. At the same time, some form of synthetic penalty estimation would still be required at the system level. For large-footprint circuits, the simulation would also require a careful evaluation of the manufacturing uncertainty and topology optimizations, which falls outside the scope of our current investigation.

#### 4. NETWORK PERFORMANCE ANALYSIS


The overall performance of the network is examined in order to evaluate the effect of the new WSS architecture on various optical transport solutions. The Statistical Network Assessment Process (SNAP) [18] is used for this purpose, which operates at the physical layer of the network being tested and assesses the degradation of QoT caused by each network element. In this study, a disaggregated abstraction of the physical layer is adopted, where each network element is assumed to introduce gain or loss as well as Gaussian disturbance. This includes Amplified Spontaneous Emission (ASE) noise from amplifiers and Non-Linear Interference (NLI) from fiber propagation. As a result, the GSNR for the  $i$ -th channel under test is defined as:

$$\text{GSNR}_i = \frac{P_{S,i}}{P_{\text{ASE}(f_i)} + P_{\text{NLI}(f_i)}} \quad (1)$$

where  $P_{S,i}$  denotes the signal launch power,  $P_{\text{ASE}(f_i)}$  is the amplified spontaneous emission while  $P_{\text{NLI}(f_i)}$  is fiber nonlinear interference [19, 20]. Our analysis assumes that the optical amplifiers in a multi-band optical system, including the C- and L-band channels amplified by commercial Erbium-Doped Fiber Amplifiers (EDFAs) and the S-band channels amplified with a Thulium-Doped Fiber Amplifier (TDFA), are tuned separately

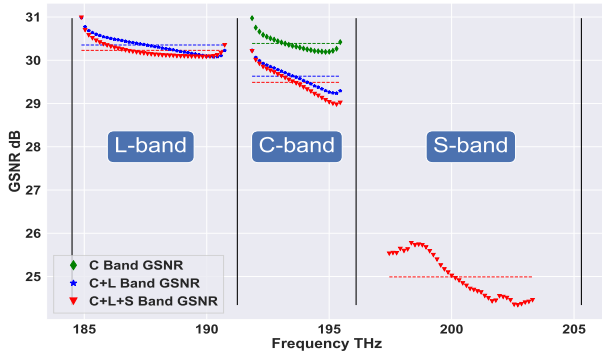


**Fig. 8.** GSNR vs. frequency for 105 channels (S+C+L-25+40+40 channels) for all scenarios (C-band only, C+L and S+C+L).

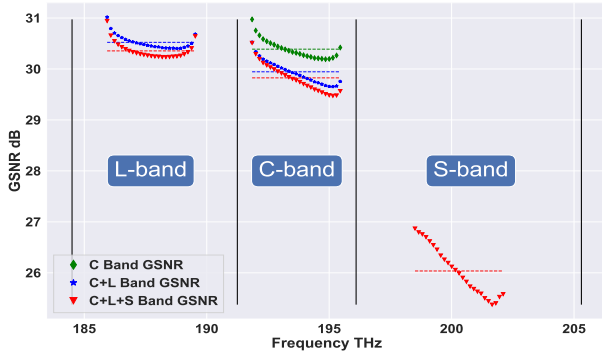


**Fig. 9.** GSNR vs. frequency for 25 channels/band for all scenarios (C-band only, C+L and S+C+L).

for each band. The amplified lines consist of identical 75 km single-mode fibers that comply with the ITU-T G.652D standard. The transceivers for each frequency operate on the ITU-T 100 GHz WDM grid with  $R_s = 60$  GBaud for 400G transceivers [5] and the 150 GHz WDM grid with  $R_s = 120$  GBaud for 800G transceivers [21]. The study adopts a span-by-span approach to optimize the input power for the C, L, and S bands, using the Local Optimization Global Optimization (LOGO) algorithm to maximize the QoT. The GSNR profile versus frequency of a single span of 75 km for the C, C + L, and S+C+L bands for FSR=100 GHz is already shown in [5]. In this analysis, we have considered reasonably loaded C, L and S bands at FSR=150 GHz which results in 105 channels (C band-25 ( $\approx 4$  THz), L band-40 (6 THz), and S band-40 (6 THz) channels) shown in Fig. 8 and also fully loaded C-band only with a normalized number of channels in other bands (C band-25 ( $\approx 4$  THz), L band-25 ( $\approx 4$  THz) and S band-25 ( $\approx 4$  THz) channels) shown in Fig. 9.

Fig. 8 illustrates the GSNR values obtained for almost the entire spectrum of C- and L- bands and partially covering the S-band represented by dotted lines indicating the average. The average GSNR for the C-band only in this case is 30.42 dB, whereas for the C+L band, the average GSNR obtained for the C-band is 29.7 dB, and for the L-band, the average GSNR is 30.3 dB. When activating all bands (S+C+L), the average GSNR value for the C-band is 29.5 dB, the average GSNR value for the L-band is 30.15 dB, and for the S-band, it is 25 dB. Similarly, Fig. 9 shows the GSNR profile for a window of approximately 4 THz for each band. The average GSNR for the C-band only is 30.4 dB, while for the C+L band, the average GSNR for the C-band drops to 29.9 dB, and the L-band GSNR average is 30.45 dB. With activa-

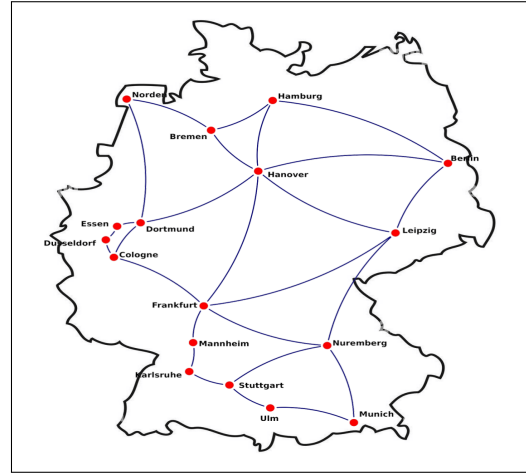

**Fig. 10.** German topology.

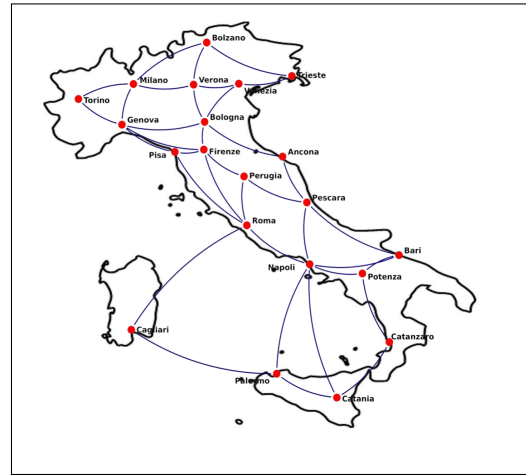


**Fig. 11.** Italian topology.

tion of the three S+C+L bands, the average GSNR for the C-band decreases to 29.7 dB, the average GSNR of the L band is 30.2 dB, and the S-band average GSNR is 26 dB. In the C+L and S+C+L band scenarios, the average GSNR of the C-band and L-band is lower than the reference C-band transmission case, mainly due to the iterative impact of SRS and NLI.

The Routing and Wavelength Assignment (RWA) algorithm is used to designate Light-Paths (LPs); specifically, the  $k$ -shortest routes with  $k = 5$  are used for routing, and the first-fit technique is used to allot spectrum. To reduce the need to establish new LPs, traffic grooming is attempted by verifying the availability of idle capacity in existing LPs. If a new LP needs to be established, the optical controller selects the appropriate modulation format based on the estimated QoT and the Required GSNR (RGSNR) for the transceiver [22]. In addition, the network evaluation is conducted with a uniform traffic distribution among all nodes in the network.

In this work, we have considered the German and Italian topologies illustrated in Fig. 10 and Fig. 11, respectively. The German topology comprises 17 optical nodes (red dots) which represent the ROADMs, where traffic request is added/dropped, and 26 edges (blue lines) which represent the optical line systems comprised of fiber pairs and in-line amplifiers, with an average node degree of 3.1, an average inter-node distance of

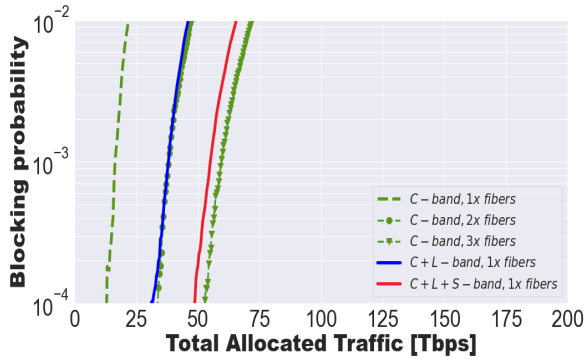

**Fig. 12.** Blocking probability evaluated over the German network ( $\approx 4$  THz/band) considering 400G transceivers.

207 km, and a maximum link length of 300 km. On the other hand, the Italian topology consists of 21 nodes and 36 edges, with an average node degree of 3.43, an average inter-node distance of 209 km, and a maximum link length of 400 km.


## 5. RESULTS AND DISCUSSION

This section shows the results obtained for the two network topologies under consideration. Throughout our analysis, we used the upgraded WSS device described in Sec. 2 and we evaluated its impact on various networking scenarios, including the multi-band scenario. We commence by comparing the performance of different transceivers, 400G and 800G, followed by assessing the utilization of regenerators and their effect on the overall network performance in terms of traffic allocation. Lastly, to ensure a fair evaluation of multi-band results when implementing the proposed WSS structure in a ROAD architecture, we compare the performance of BDM and SDM networks regarding channel allocation. Blocking probability is a key performance metric in network analysis, particularly in the context of allocation of network resources and capacity planning. It quantifies the probability that a new connection request is denied or "blocked" due to insufficient resources, such as available channels or bandwidth. The blocking probability threshold is set at  $BP = 10^{-2}$  for all the analyses and is calculated by dividing the number of blocked connection requests by the total number of connection requests attempted within the network. We assume a Core Continuity Constraint (CCC) in the single-band scenario, which requires that each LP be allocated in the same fiber from the source to the destination node and corresponds to the switching technique [23]. This method is preferred because it yields two or three times as many fiber pairs as the multi-band method in C+L and C+L+S.


### A. 400G vs. 800G transceiver

By switching to higher capacity transceivers, it is possible to achieve a lower cost per bit as more modulation levels are available, along with higher baud rates. Our analysis compared the 400G and 800G transceivers while limiting the maximum modulation format to 16QAM to ensure a fair comparison.

The simulations are executed for the German network topology for the multi-band scenario for three transceivers: 400G, 800G and ideal. The ideal case is the theoretical maximum traffic limit that can be achieved. The results of optimized transmission are utilized to conduct network-level analysis by using the GSNR values for each WDM channel to generate a topological graph. This graph is weighted by GSNR degradation

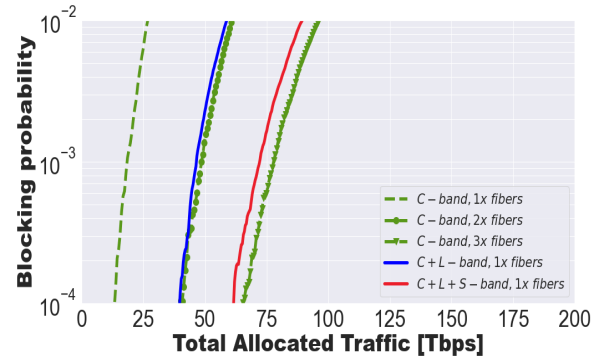

**Fig. 13.** Blocking probability evaluated over the German network ( $\approx 4$  THz/band) considering 800G transceivers.

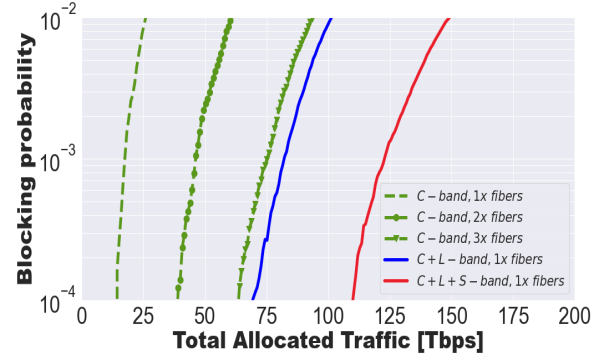


**Fig. 14.** Blocking probability evaluated over the German network (C/L/S-band  $\approx 4$  THz/6 THz/6 THz) considering 800G transceivers.

to implement SNAP. In all the cases depicted in Fig. 12, Fig. 13, Fig. 14, and Fig. 15, SNAP is applied. As a reference, we take the C-band 1x fiber and compare it to the C-band 2x fibers with the C+L multi-band and the C-band 3x fibers with the C+L+S multi-band. We employed different parameters for the 400G and 800G transceiver cases. Specifically, for the 400G transceiver, we utilized a channel spacing of 100 GHz and a baud rate of 60 Gbaud. In the case of the 800G transceiver, we employed a channel spacing of 150 GHz and a baud rate of 120 Gbaud. To maintain consistency, we normalized all frequency bands to  $\approx 4$  THz for both the 400G and 800G transceivers, shown in Fig. 12 and Fig. 13. For the 800G transceiver, we also evaluated its performance with an extended bandwidth of up to 6 THz for the L- and S-bands and  $\approx 4$  THz for the C-band, shown in Fig. 14.

The plot in Fig. 12 illustrates the traffic allocation versus the blocking probability for the 400G transceiver case. The C-band 1x fiber has a delivery capacity of approximately 23 Tbps. When we consider C-band 2x fibers and multi-band C+L 1x fiber, they perform similarly and can allocate traffic of roughly 45 Tbps. With C-band 3x fiber, we can achieve approximately 73 Tbps; with multi-band C+L+S 1x fiber, we can assign approximately 68 Tbps. The plot in Fig. 13 illustrates the traffic allocation versus the blocking probability for the 800G transceiver case. The C-band 1x fiber has a delivery capacity of approximately 27 Tbps. When we consider C-band 2x fibers and multi-band C+L 1x fiber, they perform similarly and can allocate traffic of roughly 60 Tbps. With C-band 3x fiber, we can achieve approximately 92 Tbps; with multi-band C+L+S 1x fiber, we can assign approximately 87 Tbps. In the latter scenario of both the 400G and 800G hav-



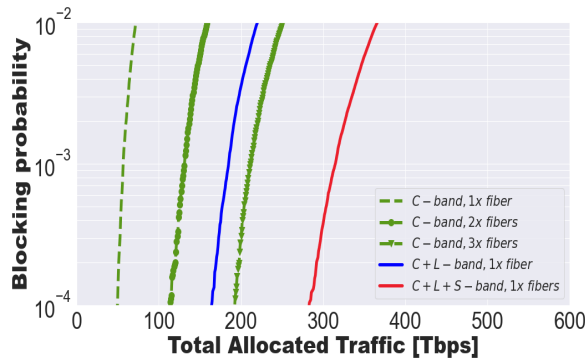

**Fig. 15.** Blocking probability evaluated over the German network considering ideal transceivers.


ing almost the same bandwidth, the traffic allocation is slightly higher in the 3x fiber than in the multi-band scenario. This is due to the introduction of a non-linear propagation penalty when transmitting three bands (C+L+S) on a single fiber.

The plot in the Fig. 14 illustrates the traffic allocation versus blocking probability for the 800G transceiver case for the extended L- and S- bands ( $\approx 6$  THz spectrum usage). The delivery capacity of the reference C-band 1x fiber is approximately 28 Tbps. For the C-band 2x fiber, the traffic allocation is nearly 55 Tbps, whereas, for the multi-band C+L 1x fiber case, the traffic allocation is slightly greater than 100 Tbps. The difference in traffic allocation is more significant in the multi-band case due to the greater spectrum usage in the C+L bands, with almost 10 THz of spectrum usage compared to the 7.5 THz in the C-band 2x fiber. With C-band 3x fiber, we can achieve approximately 94 Tbps, and with multi-band C+L+S 1x fiber, we can allocate around 148 Tbps, mainly due to the higher spectrum usage in the latter case, which is approximately 15 THz. The C+L+S-band for the 400G transceiver has a capacity of 5.67 b/Hz, while the 800G transceiver has a C+L+S-band capacity of 14.6 b/Hz. Overall, the 800G transceiver provides better traffic allocation than the 400G transceiver, with a significant difference in the multi-band C+L+S scenario due to the higher spectrum usage.


The Fig. 15 represents the ideal transceiver scenario with zero penalties, representing the maximum achievable traffic capacity, and is higher than the capacity achievable with the 800G transceiver. According to the graphs the C-band reference has a maximum attainable traffic allocation of around 75 Tbps. In comparison, the C-band 2x fiber and C-band 3x fiber have achievable capacities of 150 Tbps and 250 Tbps, respectively. The attainable capacity is around 215 Tbps for the multi-band C+L scenario, and it is slightly greater than 350 Tbps for the multi-band C+L+S scenario. When comparing these ideal transceiver scenarios, it can be observed that the 800G transceiver can still effectively distribute traffic despite penalties. Additionally, in the comparison between the 400G and 800G transceivers, the 800G model demonstrates better traffic allocation and a higher bits per Hertz ratio.

## B. Transparent vs Translucent

In the context of a transparent network, our approach involves establishing a new LP that spans end-to-end, utilizing the highest achievable modulation format without intermediate regeneration and adhering to the wavelength continuity constraint across all links in the path. However, in translucent scenarios, this constraint is eliminated at nodes where regeneration occurs,

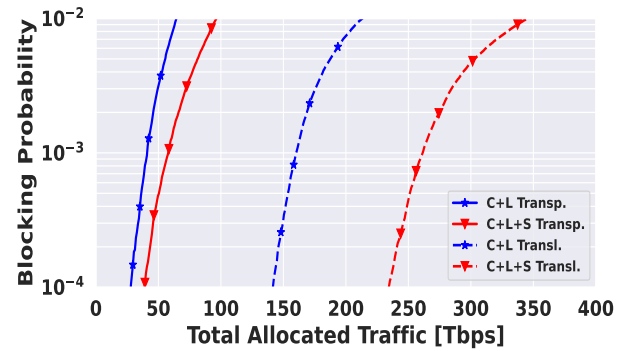

**Fig. 16.** Network capacity for transparent and translucent network design for the C-, C+L-, and S+C+L-band with 800 Gb/s traffic request size in the Italian network topology.

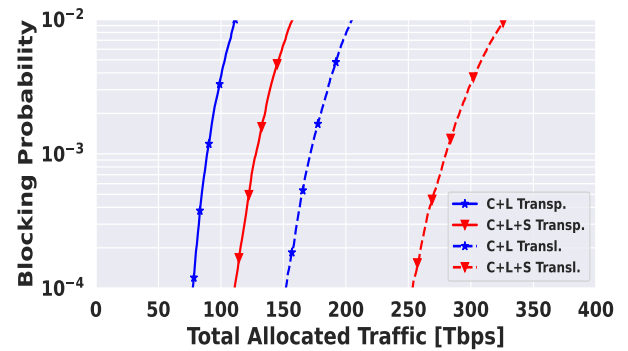


**Fig. 17.** Network capacity for transparent and translucent network design for the C-, C+L-, and C+L+S-band with 800 Gb/s traffic request size in the German network topology.

which involves using a pair of back-to-back transceivers. To ensure that the maximum bit rate of 800 Gbps (16QAM) is maintained for the LP, our controller activates an additional pair of transceivers at intermediate nodes when necessary.

The results are obtained for the multi-band (C+L- and C+L+S-bands) scenario for both the Italian and German networks shown in Fig. 16 and Fig. 17, respectively. The Italian network has slightly greater link lengths than the German network. In Fig. 16, it can be observed that in the transparent scenario, the total traffic allocated for the C+L-band is 65 Tbps, whereas, for the translucent scheme, it is 220 Tbps. Similarly, for the C+L+S-band, the allocated traffic is almost 100 Tbps in the transparent scenario, while it is around 350 Tbps in the translucent scenario. Likewise, the data presented for the German network in Fig. 17 reveals that in the transparent scenario, the total traffic assigned to the C+L-band amounts to 120 Tbps, whereas in the translucent setup, it rises to 210 Tbps. Additionally, in the case of the C+L+S-band, the allocated traffic is approximately 155 Tbps in the transparent scenario, whereas it reaches around 330 Tbps in the translucent design.

The higher traffic allocation in the translucent scenario compared to the transparent procedure is due to removing the wavelength continuity constraint at the intermediate nodes where regeneration is performed. This allows for more flexibility in traffic routing and enables the use of additional wavelengths, leading to higher traffic capacity. Additionally, activating ex-

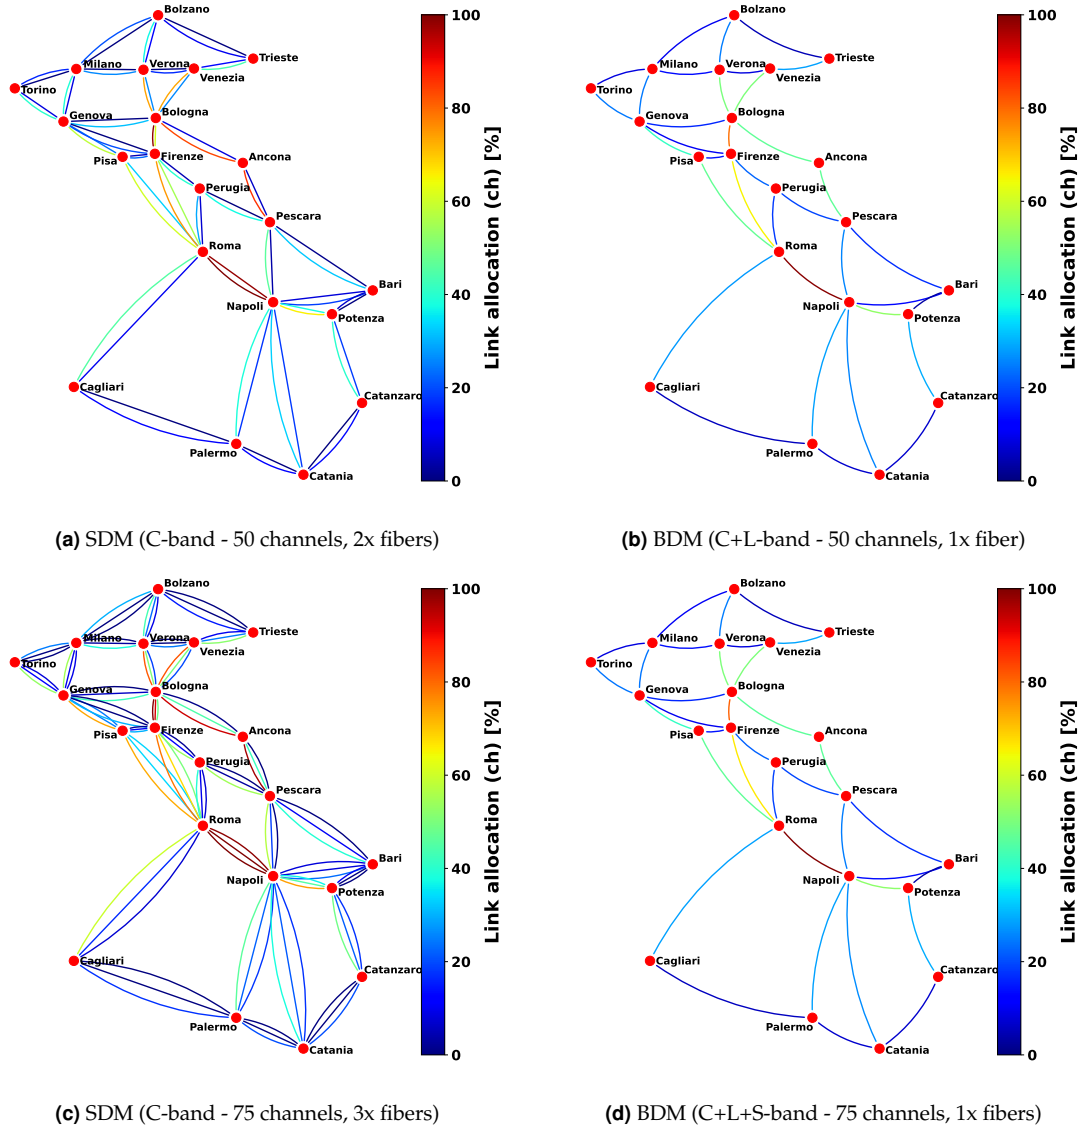

**Fig. 18.** Italian topology channel allocation comparison - 800G transceiver.

tra pairs of transceivers on intermediate nodes when necessary to maintain the maximum bit rate for that LP (800 Gbps) also contributes to the higher traffic allocation in the translucent scenario.

### C. SDM vs. BDM comparison in terms of channels

To ensure a fair comparison, we evaluated multi-band results using the proposed WSS structure integrated into the ROADM architecture to assess the performance of BDM and SDM networks [24]. While the BDM method used multi-bands (C+L and C+L+S), our study used the SNAP network performance analysis, presuming SDM with numerous fibers in the C-band on the same total spectrum. We took into account different fibers (2x and 3x) for SDM and maintained the L- and S-band channel limit at 25 while utilizing almost 4 THz of spectrum per band to effectively compare the link capabilities. The evaluation is carried out on both the network topologies (Italy and German) by considering the allocation of channels (25 channels per band) in both scenarios of SDM with multiple fibers and BDM for 800G transceiver. The comparison between SDM (2x fibers, 50

channels) and BDM (C+L, 50 channels per fiber) is depicted in Fig. 18 (a) and (b), while Fig. 18 (c) and (d) illustrate the comparison between SDM (3x fibers, 75 channels) and BDM (C+L+S, 75 channels per fiber) for the Italian topology. Likewise, the comparison between SDM (2x fibers, 50 channels per fiber) and BDM (C+L, 50 channels per fiber) is depicted in Fig. 18 (a) and (b), while Fig. 18 (c) and (d) illustrate the comparison between SDM (3x fibers, 75 channels) and BDM (C+L+S, 75 channels per fiber) for the German topology. The allocation of links based on channel utilization is visualized as a heat map, where a darker shade of orange indicates a higher percentage of channel allocation, while blue represents a lower percentage of channel allocation.

The link allocation in terms of channel for the SDM and BDM scenarios for both network topologies is shown in Table 1. The multi-band BDM scenario has slightly lower channel allocation in both network scenarios than the single-band SDM scenario. However, the difference between SDM and BDM increases slightly in the case of SDM with three fibers and multi-band BDM (S+C+L bands) due to nonlinear propagation caused by transmitting all three bands on a single fiber.

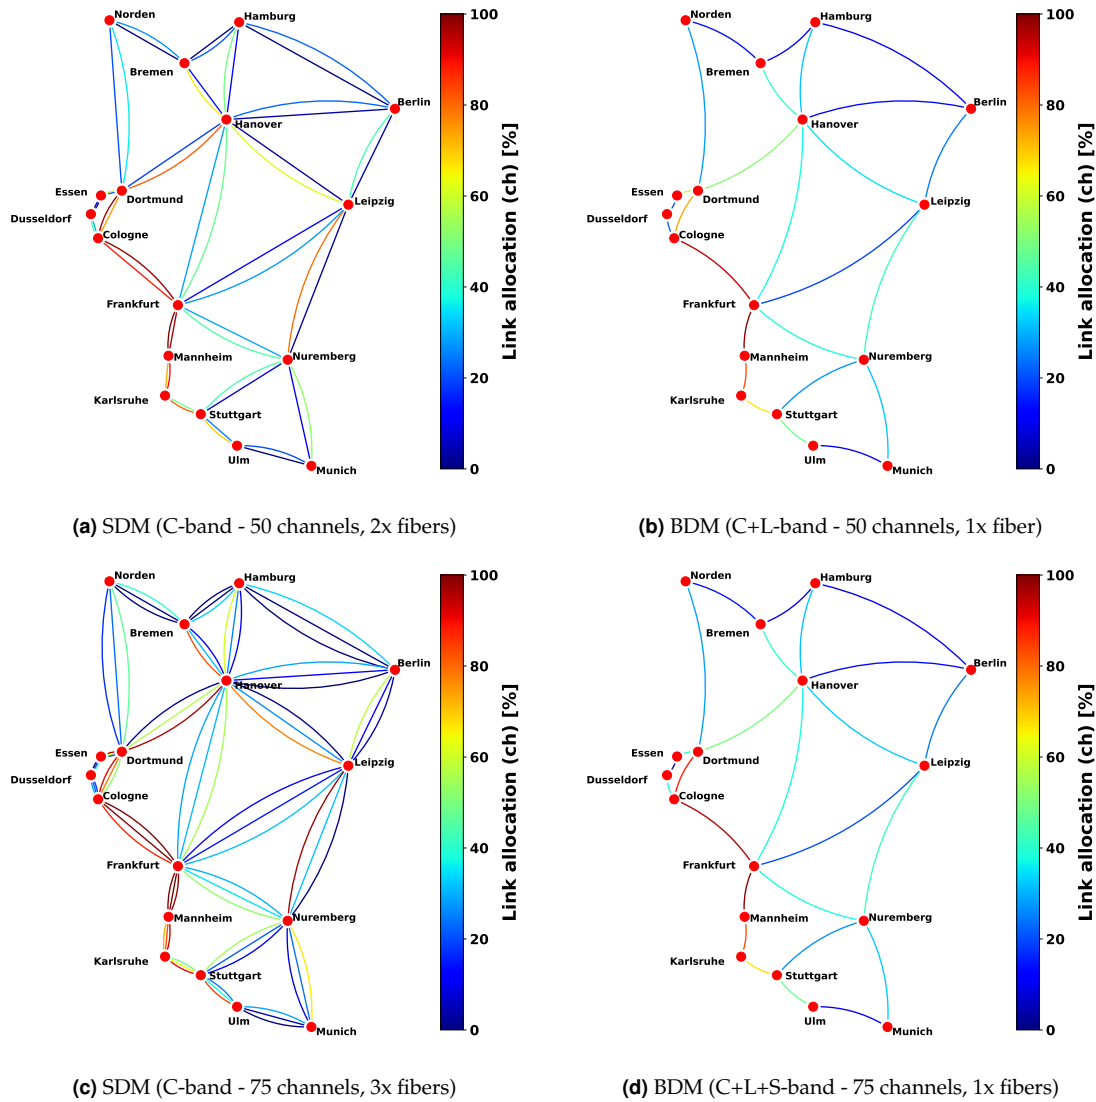


Fig. 19. German topology channel allocation comparison - 800G transceiver.

Table 1. SDM vs. BDM link allocation details.

	Link allocation (channel) %			
Topology	C-band, 2x fibers	C+L- band	C-band, 3x fibers	C+L+S band
Italian	28.17	27.95	29.38	28.16
German	39.62	38.83	40.2	39.58

## 6. CONCLUSION

This work proposed a networking performance evaluation for a modular photonic integrated wideband WSS that supports multi-band operation across different spectral regions. Our proposed multi-band WSS serves as a switching section of a ROADM architecture, and we analyzed the performance of different transceivers and the impact of regenerators on network performance. Our findings reveal that higher capacity transceivers result in improved traffic allocation when considering the same bandwidth, and specifically, the 800G transceiver outperforms the 400G transceiver in terms of traffic allocation. Additionally, we have shown the impact of regenerators on the network using the 800G transceiver and the proposed multi-band WSS on the network traffic allocations. We also conducted

a fair evaluation of multi-band (C+L- and C+L+S- bands) results with the widely deployed C- band and its impact on the channel allocation, keeping the same number of channels for each band. Our study provides valuable insights into optimal network configurations that maximize network capacity and performance.

## ACKNOWLEDGMENTS

Portions of this work were presented at the Globecom 2022 conference, in a work with title "Network Performance of ROADM Architecture Enabled by Novel Wideband-integrated WSS". The presented work has been supported by the EU within the Italian National Recovery and Resilience Plan (NRRP) of NextGenerationEU, partnership on "Telecommunications of the Future" (PE00000001 - program "RESTART")

## REFERENCES

1. Cisco, "CAGR Cisco prediction 2018–2023," <https://www.cisco.com/c/en/us/solutions/collateral/executive-perspectives/annual-internet-report/white-paper-c11-741490.html> (2020).

2. A. Ferrari, A. Napoli, J. K. Fischer, N. Costa, A. D'Amico, J. Pedro, W. Forysiak, E. Pincemin, A. Lord, A. Stavdas *et al.*, "Assessment on the achievable throughput of multi-band ITU-T G. 652. D fiber transmission systems," *J. Light. Technol.* **38**, 4279–4291 (2020).
3. V. Curri, "Multiband optical transport: a cost-effective and seamless increase of network capacity," in *PND*, (OSA, 2021), pp. NeTu2C–3.
4. T. A. Strasser and J. L. Wagener, "Wavelength-selective switches for ROADMs applications," *IEEE J. Sel. Top. Quantum Electron.* **16**, 1150–1157 (2010).
5. M. U. Masood, I. Khan, L. Tunesi, B. Correia, E. Ghillino, P. Bardella, A. Carena, and V. Curri, "Network performance of roadm architecture enabled by novel wideband-integrated wss," in *GLOBECOM 2022 - 2022 IEEE Global Communications Conference*, (2022), pp. 2945–2950.
6. L. Tunesi, I. Khan, M. U. Masood, E. Ghillino, A. Carena, V. Curri, and P. Bardella, "Modular photonic-integrated device for multi-band wavelength-selective switching," in *2022 27th OptoElectronics and Communications Conference (OECC) and 2022 International Conference on Photonics in Switching and Computing (PSC)*, (2022), pp. 1–3.
7. M. Hammood, A. Mistry, H. Yun, M. Ma, S. Lin, L. Chrostowski, and N. A. F. Jaeger, "Broadband, silicon photonic, optical add-drop filters with 3 dB bandwidths up to 11 THz," *OL* **46**, 2738–2741 (2021).
8. A. P. Masilamani and V. Van, "Design and realization of a two-stage microring ladder filter in silicon-on-insulator," *Opt. Express* **20**, 24708–24713 (2012).
9. N. Eid, R. Boeck, H. Jayatileka, L. Chrostowski, W. Shi, and N. A. F. Jaeger, "Fsr-free silicon-on-insulator microring resonator based filter with bent contra-directional couplers," *Opt. Express* **24**, 29009–29021 (2016).
10. X. Tu, C. Song, T. Huang, Z. Chen, and H. Fu, "State of the art and perspectives on silicon photonic switches," *Micromachines* **10** (2019).
11. N. Dupuis, A. V. Rylakov, C. L. Schow, D. M. Kuchta, C. W. Baks, J. S. Orcutt, D. M. Gill, W. M. J. Green, and B. G. Lee, "Ultralow crosstalk nanosecond-scale nested 2 × 2 mach-zehnder silicon photonic switch," *Opt. Lett.* **41**, 3002–3005 (2016).
12. Z. Lu, D. Celo, H. Mehrvar, E. Bernier, and L. Chrostowski, "High-performance silicon photonic tri-state switch based on balanced nested Mach-Zehnder interferometer," *Sci. Reports* **7**, 12244 (2017).
13. D. Yi, W. Zhou, Y. Zhang, and H. K. Tsang, "Inverse design of multi-band and wideband waveguide crossings," *Opt. Lett.* **46**, 884–887 (2021).
14. Z. Yu, A. Feng, X. Xi, and X. Sun, "Inverse-designed low-loss and wideband polarization-insensitive silicon waveguide crossing," *Opt. Lett.* **44**, 77–80 (2019).
15. S. Wu, X. Mu, L. Cheng, S. Mao, and H. Fu, "State-of-the-art and perspectives on silicon waveguide crossings: A review," *Micromachines* **11** (2020).
16. S. Singh, K. Kojima, T. Koike-Akino, B. Wang, K. Parsons, S. Nishikawa, and E. Yagyu, "An MMI-based wavelength combiner employing non-uniform refractive index distribution," *Opt. Express* **22**, 8533–8540 (2014).
17. J. Mu, S. A. Vázquez-Córdova, M. A. Sefunc, Y.-S. Yong, and S. M. García-Blanco, "A low-loss and broadband MMI-based multi/demultiplexer in Si<sub>3</sub>N<sub>4</sub>/SiO<sub>2</sub> technology," *J. Light. Technol.* **34**, 3603–3609 (2016).
18. V. Curri, M. Cantono, and R. Gaudino, "Elastic all-optical networks: A new paradigm enabled by the physical layer. How to optimize network performances?" *J. Light. Technol.* **35**, 1211–1221 (2017).
19. A. Carena, V. Curri, G. Bosco, P. Poggiolini, and F. Forghieri, "Modeling of the impact of nonlinear propagation effects in uncompensated optical coherent transmission links," *J. Light. technology* **30**, 1524–1539 (2012).
20. M. Cantono, D. Pileri, A. Ferrari, C. Catanese, J. Thouras, J.-L. Augé, and V. Curri, "On the interplay of nonlinear interference generation with stimulated raman scattering for qot estimation," *J. Light. Technol.* **36**, 3131–3141 (2018).
21. Z. Qiang, Y. Hong, W. Longbao, X. Zhuopeng, and Z. Huijian, "Single-carrier 800 Gbit/s and 1.2 Tbit/s transmission using 96 GBaud commercial optoelectronic components," in *Asia Communications and Photonics Conference 2021*, (Optica Publishing Group, 2021), p. T1B.4.
22. R. Sadeghi, B. Correia, E. Virgillito, A. Napoli, N. Costa, J. Pedro, and V. Curri, "Performance comparison of translucent C-band and transparent C+L-band network," in *Optical Fiber Communication Conference*, (Optical Society of America, 2021), pp. M3E–4.
23. P. S. Khodashenas, J. M. Rivas-Moscoco, D. Siracusa, F. Pederzoli, B. Shariati, D. Klonidis, E. Salvadori, and I. Tomkos, "Comparison of spectral and spatial super-channel allocation schemes for SDM networks," *J. Light. Technol.* **34**, 2710–2716 (2016).
24. M. U. Masood, I. Khan, L. Tunesi, B. Correia, R. Sadeghi, E. Ghillino, P. Bardella, A. Carena, and V. Curri, "Networking analysis of photonics integrated multiband WSS based ROADMs architecture," in *2022 International Conference on Software, Telecommunications and Computer Networks (SoftCOM)*, (IEEE, 2022), pp. 1–6.