

Refinement of Structural Theories for Composite Shells through Convolutional Neural Networks

Original

Refinement of Structural Theories for Composite Shells through Convolutional Neural Networks / Petrolo, M.; Iannotti, P.; Trombini, M.; Melis, M.. - (2023). (Intervento presentato al convegno 27th Congress of the Italian Association of Aeronautics and Astronautics, AIDAA 2023 tenutosi a Padova nel 4-7 September 2023).

Availability:

This version is available at: 11583/2982232 since: 2023-09-17T14:23:59Z

Publisher:

AIDAA

Published

DOI:

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

???

??

????????

Original

????????????

????????????

????????

Availability

??????

Publisher

?

Published

?

Terms of use

????????????

?

Publisher copyright

????

??

comparison with the outcome expected from the AAM. For the structural case presented here, the best models were selected based on the accuracy in estimating different natural frequencies and failure indexes, with the results summarized through the Best Theory Diagram (BTD).

CUF and FEM Formulation

CUF efficiently obtains the governing equations and the finite element formulations for virtually any higher-order theory. For shells, the displacement field is expressed as

$$u(\alpha, \beta, z) = F_\tau(z)u_\tau(\alpha, \beta) \quad \tau = 1, \dots, M \quad (1)$$

$F_\tau(z)$ are the expansion functions adopted along the thickness, $u_\tau(\alpha, \beta)$ is the vector of the generalized unknown displacements, and M is the total number of expansion terms. The Einstein notation is used on τ . As an example of displacement field formulation stemming from a higher-order theory, a complete fourth-order model (E4) is reported herein extended format,

$$\begin{aligned} u_\alpha &= u_{\alpha_1} + zu_{\alpha_2} + z^2u_{\alpha_3} + z^3u_{\alpha_4} + z^4u_{\alpha_5} \\ u_\beta &= u_{\beta_1} + zu_{\beta_2} + z^2u_{\beta_3} + z^3u_{\beta_4} + z^4u_{\beta_5} \\ u_z &= u_{z_1} + zu_{z_2} + z^2u_{z_3} + z^3u_{z_4} + z^4u_{z_5} \end{aligned} \quad (2)$$

From the geometrical and constitutive relations described in [8], and by applying the Principle of Virtual Displacements (PVD), the governing equation for the free-vibration problem can be derived for the k -th layer:

$$m_{\tau sij}^k \ddot{u}_{\tau i}^k + k_{\tau sij}^k u_{\tau i}^k = 0 \quad (3)$$

$k_{\tau sij}^k$ and $m_{\tau sij}^k$ are 3x3 matrices known as fundamental nuclei of the stiffness and mass matrices, respectively. By assembling all nodes and elements and introducing the harmonic solution, the complete formulation of the eigenvalue problem can be obtained,

$$(-\omega_n^2 M + K)U_n = 0 \quad (4)$$

Using the same approach for the static case, the governing equation reads:

$$k_{\tau sij}^k u_{\tau i}^k = p_{sj}^k \quad (5)$$

Here, p_{sj}^k is the fundamental nucleus for the external mechanical load. Similarly, the well-known static problem formulation is derived through the assembly procedure.

$$KU_n = P \quad (6)$$

For a more in-depth description of the assembly procedure and other mathematical details, the reader can refer to [8].

Axiomatic/Asymptotic Method

AAM selects the optimal set of expansion terms, or generalized variables, to adopt for a specific problem configuration. The aim is to find the most convenient structural theory to provide the best accuracy at the lowest computational cost. Dealing with polynomial expansions, this procedure's

first step is defining the maximum order allowed. For the work presented in this paper, a maximum order of four was considered, leading to a total amount of possible theories equal to 2^{15} . This number was reduced to 2^{12} by always considering the constant terms for each of the three displacement components. The accuracy of each model can be evaluated by choosing a reference solution, e.g., the full fourth-order expansion, E4, and a control parameter. The first one considered in this paper was the percentage error over the single natural frequency, defined as follows:

$$\%E_{f_i} = 100 \times \frac{|f_i - f_i^{E4}|}{f_i^{E4}} \quad (7)$$

where f_i^{E4} is the i -th frequency evaluated using the reference full fourth-order Taylor expansion. The second indicator adopted was the percentage error over a failure index evaluated at a specific location in the structure. The 3D Hashin criterion [9] was selected for this purpose. For example, the percentage error over the index for the matrix tension (MT) mode is

$$\%E_{MT} = 100 \times \frac{|MT - MT^{E4}|}{MT^{E4}} \quad (8)$$

The outcome of this selection procedure is summarized by the BTD, a graphical representation of the accuracy achievable by varying the number of generalized variables adopted. Each point of the BTD corresponds to the best theory, given the number of active expansion terms.

Convolutional Neural Network

A CNN able to handle multi-dimensional inputs and outputs was used. The input is represented by the set of active generalized variables identifying a specific structural theory. This information is first encoded into a series of 0 and 1, corresponding to a deactivated and active term, respectively. An example of this procedure is presented here,

$$\begin{aligned} u_\alpha &= u_{\alpha_1} + zu_{\alpha_2} + z^4u_{\alpha_5} \\ u_\beta &= u_{\beta_1} + zu_{\beta_2} + z^3u_{\beta_4} \\ u_z &= u_{z_1} + zu_{z_2} + z^2u_{z_3} \end{aligned} \quad \Rightarrow \quad [111001010100] \quad (9)$$

Note that the three constant terms were not included in the sequence because they were always considered active. This sequence is then re-shaped into a 3×4 matrix, constituting the actual input to the network. The output consists of the percentage errors over the first ten natural frequencies or the two evaluated failure indexes. The complete architecture is presented in Table 1. The training of the network was performed only using 10% of all possible theories and related errors.

Table 1. Parameters and architecture of the adopted CNN.

Layer Type	Filters (Size) / Neurons	Activation Function
Convolutional	128 (3x3)	ReLU
Convolutional	128 (3x3)	ReLU
Convolutional	128 (3x3)	ReLU
Flatten	-	-
Dense	128	ReLU
Dense	128	ReLU
Output	10 or 2	Sigmoid

Numerical Results

A simply-supported shell with $[0^\circ/90^\circ/0^\circ]$ stacking sequence was considered. The curvature radii were kept equal along the two curvilinear coordinates α and β , imposing $R/a=5$. A thickness ratio $a/h=10$ was used, and the following material properties were employed: $E_{11}/E_{22}=25$, $G_{12}/E_{22}=G_{13}/E_{22}=0.5$, $G_{23}/E_{22}=0.2$, $\nu_{12}=\nu_{13}=\nu_{23}=0.25$. Only a quarter of the shell was modeled to reduce computational costs further. This choice required the use of symmetry boundary conditions, thus allowing to consider symmetrical vibration modes exclusively. A 4×4 mesh of Q9 elements was adopted.

Starting with the free-vibration problem, Figs. 1 and 2 show the BTDs for the first and third natural frequencies, respectively. In each of them, the results obtained from the direct application of the AAM are compared to those obtained by the CNN. Table 2 shows the best theories provided by CNN for the first five frequencies having eight active degrees of freedom; an active term is indicated by a black triangle, with their order increasing from left to right, up to the fourth.

In the case of failure indexes as control parameters, a static analysis was performed on the same structure. A bi-sinusoidal pressure of unit amplitude was applied to the top surface. Failure indexes were evaluated at the center of the top and bottom edges, for the compressive and tensile modes, respectively. Figure 3 shows the resulting BTD. In each diagram, some of the resulting best models are presented.

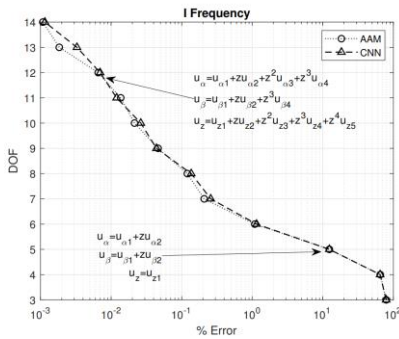


Figure 1. BTD for the 1st frequency.

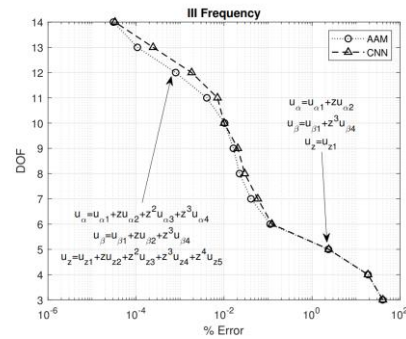


Figure 2. BTD for the 3rd frequency.

For the free-vibration case, the CNN accurately reproduced the BTD for different frequencies while also correctly providing indications regarding the relevance of specific terms. The results obtained over the failure indexes show similar levels of accuracy, with just a slight reduction when dealing with larger amounts of degrees of freedom. This behavior is related to the influence of each expansion term on the various stress components involved in the failure index estimation.

Table 2. Best models with eight active terms for the first five frequencies.

	I				II				III					
u_α	▲	▲	△	△	u_α	▲	▲	△	△	u_α	▲	▲	△	△
u_β	▲	▲	△	△	u_β	▲	▲	△	△	u_β	▲	▲	△	△
u_z	▲	△	▲	△	u_z	▲	△	△	△	u_z	▲	▲	△	▲
	IV				V									
u_α	▲	▲	△	△	u_α	▲	▲	△	△	u_α	▲	▲	△	△
u_β	▲	▲	△	△	u_β	▲	▲	△	△	u_β	▲	▲	△	△
u_z	▲	△	△	△	u_z	▲	▲	△	△	u_z	▲	▲	△	▲

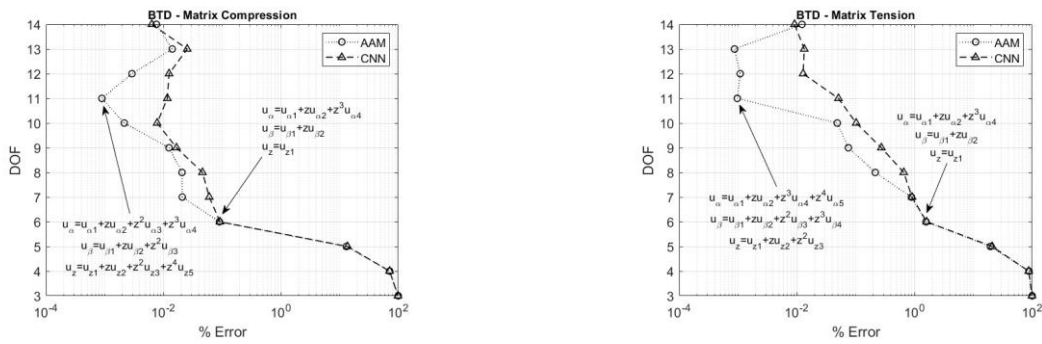


Figure 3. BTD based on the failure index

Summary

This paper explores the use of Convolutional Neural Networks in the analysis of composite shells. Focusing on higher-order theories obtained through polynomial expansions, CNN can identify the best models for various structural configurations with a fraction of the computational overhead required by the Axiomatic/Asymptotic Method. This new efficient approach can be extended to different families of problems maintaining consistent precision levels in providing the optimal modeling strategy.

References

- [1] F.B. Hildebrand, E. Reissner, G. B. Thomas, Notes on the foundations of the theory of small displacements of orthotropic shells, Technical Report, Massachusetts Institute of Technology, 1949.
- [2] J. N. Reddy, A simple higher-order theory for laminated composite plates, *Journal of Applied Mechanics*, December 1984, 51(4) 745–752.
- [3] D. S. Mashat, E. Carrera, A. M. Zenkour, S. A. Al Khateeb, Axiomatic/asymptotic evaluation of multilayered plate theories by using single and multi-points error criteria, *Composite Structures*, 106 (2013) 393–406.
- [4] M. Petrolo, M. Cinefra, A. Lamberti, E. Carrera, Evaluation of mixed theories for laminated plates through the axiomatic/asymptotic method, *Composites Part B: Engineering*, 76 (2015) 260–272.
- [5] M. Petrolo, P. Iannotti, Best Theory Diagrams for Laminated Composite Shells Based on Failure Indexes, *Aerotecnica Missili & Spazio*, In Press, DOI: 10.1007/s42496-023-00158-5
- [6] M. Petrolo, E. Carrera, Best Spatial Distributions of Shell Kinematics Over 2D Meshes for Free Vibration Analyses, *Aerotecnica Missili & Spazio*, 99 (2020) 217-232, DOI: 10.1007/s42496-020-00045-3
- [7] S. Albawi, T. A. Mohammed, S. Al-Zawi, Understanding of a convolutional neural network, 2017 International Conference on Engineering and Technology (ICET), Antalya, Turkey, 2017.
- [8] E. Carrera, M. Cinefra, M. Petrolo, E. Zappino, *Finite element analysis of structures through unified formulation*, Wiley, Chichester, 2014.
- [9] Z. Hashin, Failure criteria for unidirectional fiber composites, *Journal of Applied Mechanics*, 47 (1980) 329–334.