

Steel Frames Optimization Considering Beam-Column Joint Stiffness and Geometric Constraints

*Original*

Steel Frames Optimization Considering Beam-Column Joint Stiffness and Geometric Constraints / Rosso, M. M.; Sotiropoulos, S.; Greco, R.; Marano, G. C.. - 437:(2024), pp. 129-138. ( 2nd Italian Workshop on Shell and Spatial Structures, IWSS 2023 Turin (Ita) 26-28 June 2023) [10.1007/978-3-031-44328-2\_14].

*Availability:*

This version is available at: 11583/2984680 since: 2023-12-22T11:20:10Z

*Publisher:*

Springer

*Published*

DOI:10.1007/978-3-031-44328-2\_14

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

Springer postprint/Author's Accepted Manuscript

This version of the article has been accepted for publication, after peer review (when applicable) and is subject to Springer Nature's AM terms of use, but is not the Version of Record and does not reflect post-acceptance improvements, or any corrections. The Version of Record is available online at: [http://dx.doi.org/10.1007/978-3-031-44328-2\\_14](http://dx.doi.org/10.1007/978-3-031-44328-2_14)

(Article begins on next page)

# Steel frames optimization considering beam-column joint stiffness and geometric constraints<sup>★</sup>

Marco M. Rosso<sup>1,\*</sup>[0000-0002-9098-4132], Stefanos Sotiropoulos<sup>1</sup>[0000-0001-5669-1320], and Giuseppe C. Marano<sup>1,2</sup>[0000-0001-8472-2956]

<sup>1</sup> Politecnico di Torino, DISEG, Department of Structural, Geotechnical and Building Engineering, Corso Duca Degli Abruzzi, 24, Turin 10128, Italy

<sup>2</sup> College of Civil Engineering, Fuzhou University, Fuzhou 350108, China.

\* Corresponding Author: marco.rosso@polito.it

**Abstract.** Structural optimization is an active research branch in engineering, especially dealing with complex and concomitant aspects likewise in seismic design. Capacity design criteria for seismic design and detailing must be respected, e.g. according to the "strong-column weak-beam" principle. In steel structures, the choice of a specific beam-column joint typology may strongly affect its behavior under horizontal actions. In this study, the authors investigated the role of beam-column joint stiffness within an optimization paradigm related to steel structure frames. Specifically, the authors adopted simplified modeling assumptions for analysis under lateral loads in the Python environment and Computer and Structures inc. SAP2000 finite element software. Indeed, the main focus hitherto is oriented toward the problem definition accounting for geometric constraints and beam-column rotational stiffness capacity. Future investigations will adopt more realistic modeling procedures accounting for the typical non-linearities involved during strong dynamic actions.

**Keywords:** steel structures · geometric constraints · beam-column joints · meta-heuristic algorithms · optimization.

## 1 Introduction

In the civil engineering field, structural optimization procedures play a crucial and significant role nowadays with the final purpose of minimizing the various costs items involved in the design, construction, and maintenance phases [18,16,15]. Three main branches can be evidenced within the structural optimization field. Size optimization involves the definition of the optimal size of structural elements within the domain under investigation, whereas

---

<sup>★</sup> Supported by project ADDOPTML


shape optimization studies the optimal shape of the structural members without varying their relative positions and structural layout [18,20]. The latter aspect is indeed investigated by the topology optimization branch [18,20].

With a growing consciousness and concerns for the environmental impact of the architecture and construction industry (AEC), in recent years life-cycle cost assessment posed the structural optimization area in a new perspective to globally account for optimizing cost-effective solutions considering the entire life-cycle of a structure [12,11]. However, this approach requires tremendous efforts to carefully evaluate many complex related aspects concurring with the definition of representative cost objective functions (OF) [1]. Nonetheless, as a first approximation, and in the absence of precise requirements and prescription, the weight minimization may still be successfully used as an indirect indicator of the construction cost, directly related to the minimum material consumption [18,6,20,14]. Furthermore, the minimum self-weight optimization has other benefits besides the material consumption criterion, e.g. it may aid to reduce the inertial effects due to a reduction of the mobilized mass during earthquake conditions [17].

Mainly focusing on steel structures, one of the main aspects to account for is fulfilling capacity design criteria for seismic design and detailing, in which, e.g., the principle of "strong-column weak-beam" must be respected [5,21]. Furthermore, the technical choice of a specific beam-column joint typology may strongly affect the steel frame's behavior under horizontal actions. Numerous beam-column connection typologies exist and they affect the beam's ultimate rotational capacity behavior evaluated on the moment-rotation plane, thus permitting the formation of plastic hinges and safer ductile global mechanisms [8,10,7,3]. The stiffest connections are represented by the welded ones, but they entail increased complexities from a constructive point of view [23], therefore the less stiff bolted ones are often preferred. The specific technical solution adopted for the connection directly affects the rotational stiffness denoted as  $K_\theta$ , thus determining a semi-rigid beam-column joint. In the present study, the authors investigated in a global and simplified manner how the various limit modeling approaches of the beam-column joint [9] affect the results of a size optimization problem of a steel plane frame. Since the current focus is oriented toward global frame optimization results, linear dynamic analyses were herein conducted. Future studies should further explore the rotational stiffness effects by adopting more detailed nonlinear analyses to account for the entire moment-rotation behavior of the specific technically adopted connections.

## 2 Steel frame case study description

The two-bay three-story plane steel frame analyzed in the current document is inspired by the steel frame example presented in [19], and it is illustrated in Fig.1 (a). The black numbers represent the nodes' numbering system whereas the blue ones are referred to the structural finite element (FE) beams and columns members. The positions of semi-rigid joints are indicated with orange spirals, simulating the partial bending moment release due to the actual connection typology. Using a steel S275 material grade, the FE model has been implemented

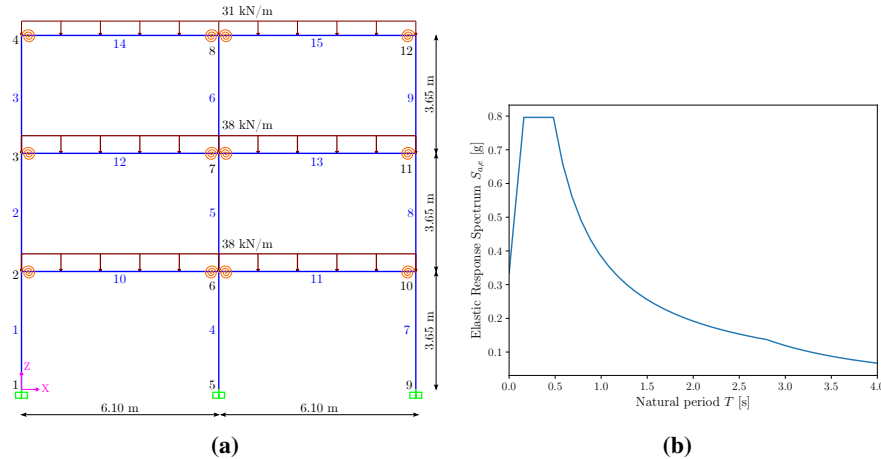

**Fig. 1.** View of the steel frame case study (a) and the adopted elastic response spectrum (b).

in the Computer and Structures inc. SAP2000 commercial software [2]. Specifically, the dead loads are automatically computed by the software after choosing the specific cross-section profile for the beams and for the columns. These latter are selected directly from the available cross sections in SAP2000 according to the Europe area commercially available standard steel profiles. Specifically, 70 different profiles for the HE steel profiles are available for the columns (HE100A, HE100B, etc., until HE1000M), and 50 different IPE cross sections are available for the beams (IPE100, IPE120, etc., until IPE600V). In order to account for seismic conditions for the optimal design of the size of each structural element, the authors hypothetically located the steel frame in the Abruzzi region in Italy, precisely in L'Aquila city. The seismic analyses have been conducted with the dynamic linear modal analysis with elastic response spectrum for the life-safety limit state (SLV), which is depicted in Fig.1 (b). The depicted response spectrum has been determined based on the geographical location of the structure, accounting for a ground typology B (typical of L'Aquila city), considering a commercial building class, with a nominal life of 50 years, an usage class III, thus a usage coefficient of  $c_U = 1.5$ , a topographical typology T1 for flat land, and considering a standard damping ratio of  $\xi = 5\%$  [21]. The complete quadratic combination (CQC) has been performed to define the action effects envelope coming from the modal superposition of the first natural modes mobilizing a modal mass ratio greater than 85%. The mass considered in the modal analysis was accounted for quasi-permanent vertical load conditions, i.e. considering the dead load and the live load multiplied for a combinatorial factor  $\psi_{2,1} = 0.6$  [21].

### 3 Discrete size optimization strategy with genetic algorithm

The authors implemented a Python script to deal with the *SAP2000 OAPI* module [2] in order to parametrize and automatically run the FE model. Specifically, the size optimization of the steel frame can be stated as a constrained problem in which the OF  $f(\mathbf{x})$  is represented by the dead load total base vertical reactions. The constraints are thus represented by the unitless ratios associated with the structural checks according to the NTC18 Italian structural design code regulations, which incorporate the EN1993 Eurocode 3 for steel structures. The assessment of the constraints has been performed with the *SAP2000 Steel Design* module [2]. The design vector  $\mathbf{x}$  is a discrete-integer-value array whose components referred to the index of the steel profiles associated with the various structural members, thus spanning between 0 and 70 for selecting a specific HE profile, and varying between 0 and 50 for identifying a specific IPE profile.

$$\left\{ \begin{array}{l} \min \quad f(\mathbf{x}) \\ s.t. \quad g_1(\mathbf{x}) = \sum_{i=1}^{15} \max\{r_{NMM,i}, 0\} \leq 1 \\ \quad \quad g_2(\mathbf{x}) = \sum_{i=1}^{15} \max\{r_{V,i}, 0\} \leq 1 \\ \quad \quad g_3(\mathbf{x}) = \delta_{max} \leq L/250 \\ \quad \quad g_4(\mathbf{x}) = \delta_2 \leq L/300 \end{array} \right. \quad (1)$$

The constraint  $g_1$  in Eq.(1) accounts for the combined bending and axial force cross-section checks ratios ( $r_{NMM,i}$ ) according to Eq.(C4.2.37) of Method B of the NTC18 commentary [22]. This ratio also accounts for compression buckling and lateral torsional buckling checks.  $g_2$  consider the shear design checks ratios ( $r_{V,i}$ ) according to NTC18 Eq.(4.2.16) [21]. On the other hand,  $g_3$  and  $g_4$  account for deformability checks respectively related to the maximum deflection  $\delta_{max}$  and to the deflection under live loads only  $\delta_2$ . SAP2000 steel design module automatically accounts for special seismic provisions such as the "strong-column weak-beam" principle by defining an over-strength check of the beam-column joint, see NTC18 Eq.(7.5.11) [21].

To address the current size optimization problem, the authors adopted the meta-heuristic well-established population-based *genetic algorithm* (GA) method [13]. Specifically, the available Python library *pymoo* [4] has been successfully employed within the current framework. Specifically, a population of 50 individuals (various samples of design vectors) has been considered, and the GA termination criterion was set to 50 generations, thus determining 2500 OF evaluation calls. The implemented Python script has been made freely available at the following GitHub repository: <https://github.com/marco-rosso-m/SAP2000-python-for-structural-optimization>.

## 4 Results and discussion

In order to explore the effects of various beam-column joint modeling strategies on the size optimization optimal solutions, the authors analyzed three structural configurations. The first configuration is related to a limit condition with perfect hinges between beams and columns, the second one is another limit condition with perfect fixity constraints between beams and columns. The third condition accounts for a more proper modeling condition referring to a realistic value of rotational stiffness  $K_\theta$ . Based on the quite extensive experimental tests provided in the existing literature [8,10,7,3], the authors have identified that a reasonable range of  $K_\theta$  values broadly spans between  $10 \times 10^3$  (bolted connections, e.g. web cleats to column flanges) and slightly lower than  $100 \times 10^3$  kNm/rad (welded connections, e.g. flush end plate to column web). Based on this quite wide range, the authors adopted a discrete range strategy to contain the search space complexity, i.e. by assuming only integer multiples of  $10^3$ , e.g.  $0 \times 10^3$ ,  $10 \times 10^3$ ,  $20 \times 10^3$ , etc.


The above-mentioned three modeling approaches have been analyzed into two main cases. In the first main case, a simplified optimization strategy has been performed, thus considering the same beams' and the same columns' profiles for every floor level. Therefore, in general, the design vector appears as a three-component array  $\mathbf{x} = [x(1), x(2), x(3)]^T$ . The first two components indicate respectively the steel profiles for the columns and for the beams for the whole elevation, whereas the third one considers a discrete possible value for  $K_\theta$  for every beam-column joint. In the second main case, instead, a more complete optimization strategy has been implemented with an extended search space, i.e. based on adopting different profiles for both columns and beams at every floor level. In that case, in general, the design vector appears in general as a nine-components array. The first three components account for different columns' HE profiles for every level, the next three ones designated the different beams' IPE profiles for every level, whereas the latter three components identify the  $K_\theta$  values for every single floor. Furthermore, two additional constraints have been introduced in order to account for geometric reasons. Indeed, when the column section varies with the elevation, it is typical that it tapers from the bottom to the top of the building. Therefore:

$$g_5(\mathbf{x}) = x(1) - x[0] \leq 0 \quad \text{and} \quad g_6(\mathbf{x}) = x(2) - x(1) \leq 0 \quad (2)$$


The summary of optimal results for all the analyzed cases is reported in Tab.1.

### 4.1 Same beams' and columns' profiles for every floor case

In this section, the results of the first main case are presented, i.e. the ones with the same beams' and columns' profiles for every floor. In particular, the above-mentioned three modeling strategies sub-cases have been explored, as depicted in Figs.2-4 respectively. In all three sub-cases, the best optimal solution was found within the first 500 OF evaluations. Since the search space is composed of two design variables only, except when considering the

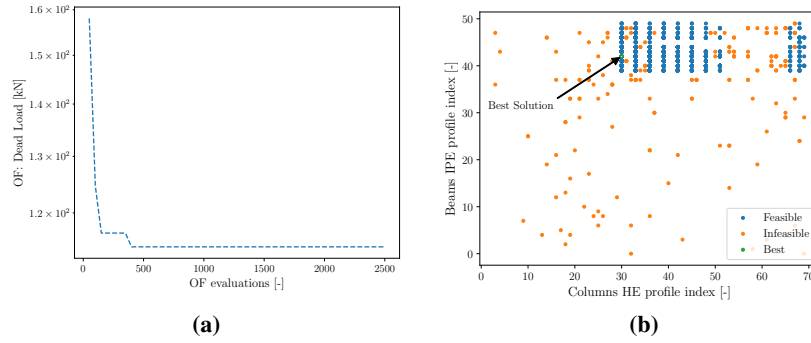


**Fig. 2.** Perfectly-hinged case with the same columns' and beams' profiles at every floor: OF history (a) and analysis of the GA's explored search space (b).

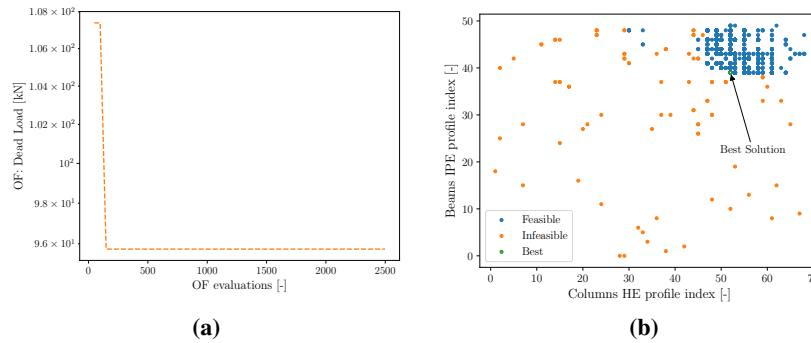

**Fig. 3.** Perfectly-fixed case with the same columns' and beams' profiles at every floor: OF history (a) and analysis of the GA's explored search space (b).


optimization of the rotational stiffness, it is worthy to visualize how the GA explored the search space of possible combinations of steel profiles, evidencing the existence of a feasible region (blue) and an unfeasible one (blue). The feasible region appears noisy in Fig.2 (b) and Fig.4 (b), probably because of the imposed respectfulness of the special seismic provisions. Between the two limit case, the fixed one better exploited the load-carrying capacities redistribution, thus ensuring the minimum OF value. A similar finding was obtained in the  $K_\theta$  sub-case, achieving an optimal remarkably large value of  $90 \times 10^3$  kNm/rad.

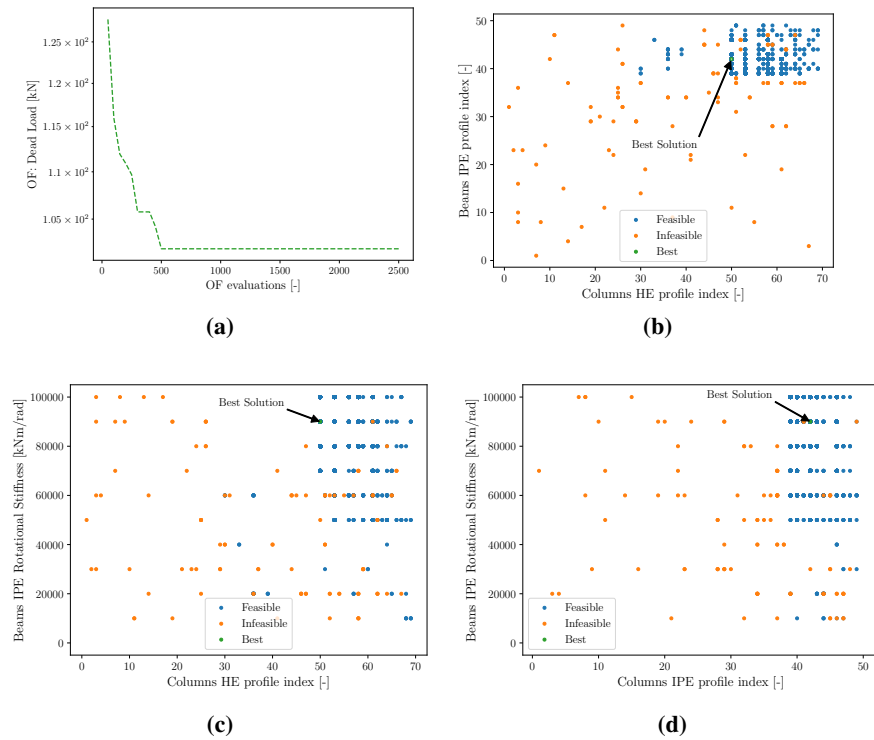

**Fig. 4.** Partially-released case with the same columns' and beams' profiles at every floor: OF history (a) and analysis of the GA's explored search space in terms of profiles (b), columns' profiles vs rotational stiffness (c), and beams' profiles vs rotational stiffness(d)

## 4.2 Different beams' and columns' profiles for every floor case

The results of the second main case are herein discussed, i.e. the one adopting different beams' profiles and different columns' profiles for every floor level. Specifically, the previously-mentioned three modeling strategies sub-cases have been analyzed, and their individual OF history during the optimization process have been gathered in Fig.5. Specifically, sub-figures (a) and (b) revealed that, during the initial 200 function evaluations, the entire population was unfeasible, and only from that point forward the GA founded the right feasible region and effectively started the actual optimization process. On the other hand, the semi-rigid connection  $K_{\theta}$  sub-case revealed that, probably the optimization procedure should have been prolonged much more than 50 iterations, since the still decreasing trend of the OF. Finally,

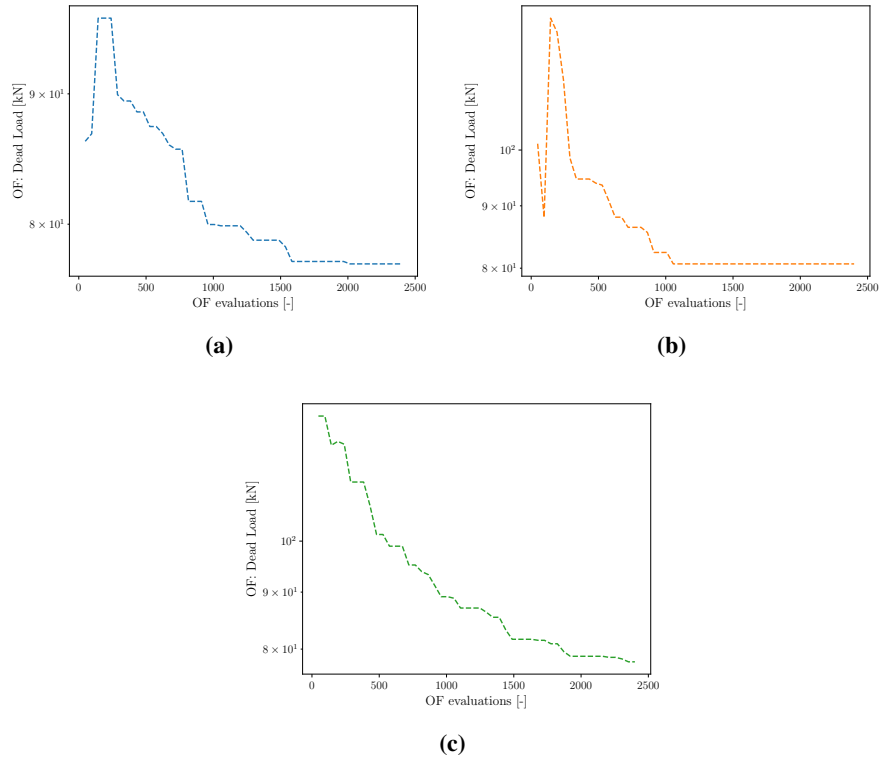

**Fig. 5.** Different columns' and beams' profiles at every floor case: OF history for perfectly-hinged beams (a), for perfectly-fixed beams (b), and for partially-released beams (c).

comparing the final results in Tab.1, this latter second main case with a more refined and comprehensive size optimization problem delivered in virtually all the cases a considerable reduction of the OF. In this occasion, the three optimal solutions are quite comparable (around 80 kN), and it is worth noting that the semi-rigid case preferred an optimal solution with almost fixed connections at the first level ( $80 \times 10^3$  kNm/rad) and almost fully hinged to the other two floor levels (0 and  $10 \times 10^3$  kNm/rad respectively).

## 5 Conclusions

The current study permitted analyzing in a simplified and linear manner the effects of three beam-column joint modeling strategies and how it affects the size optimization of a steel

**Table 1.** Summary and comparison of the optimal results.

Elements	Same profiles for every floor			Rot.Stiff. $K_{\theta}$ [kNm/rad]	Different profiles for every floor			Rot.Stiff. $K_{\theta}$ [kNm/rad]
	Hinged case profiles	Fixed case profiles	Partially released profiles		Hinged case profiles	Fixed case profiles	Partially released profiles	
Columns:								
1-4-7					HE600A	HE600A	HE500A	
2-5-8	HE300M	HE600A	HE550B		HE400A	HE400A	HE450A	
3-6-9					HE280A	HE320A	HE280A	
Beams:								
10-11					IPE550	IPE550	IPE550	$80 \times 10^3$
12-13	IPE550	IPE500O	IPE550	$90 \times 10^3$	IPE550	IPE550	IPE500O	0
14-15					IPE450R	IPE550	IPE550	$10 \times 10^3$
OF [kN]	114.366	95.741	101.976		77.181	80.652	77.925	

frame under seismic loading. As expected, the results evidenced that optimal semi-rigid joints at lower-level floors should tend to be stiffer likewise welded joints, whereas at higher levels they may tend toward hinged connections. Future studies should further explore the rotational stiffness effects by adopting more detailed nonlinear analyses to account for the entire moment-rotation behavior of the specific technically adopted connections.

## Supplementary material

The implemented code is made freely available at the following GitHub repository: <https://github.com/marco-rosso-m/SAP2000-python-for-structural-optimization>.

## Acknowledgments

This research has been supported by the **ADDOPTML project**: "ADDitively Manufactured OPTi-mized Structures by means of Machine Learning" (No: 101007595) belonging to the Marie Skłodowska-Curie Actions (MSCA) Research and Innovation Staff Exchange (RISE) H2020-MSCA-RISE-2020. Their support is highly acknowledged.

## References

1. Adeli, H., Sarma, K.C.: Cost optimization of structures: fuzzy logic, genetic algorithms, and parallel computing. John Wiley & Sons (2006)
2. Berkeley, C.: Csi analysis reference manual for sap2000. Computers and Structures, Inc., Berkeley, California (2007)
3. Bing, G., Lei, W., Ying, W., Yan, S., Hailan, T.: Experimental study on rotational stiffness of steel frame beam-column connections. Journal of Building Structures **32**(10), 82 (2011)
4. Blank, J., Deb, K.: pymoo: Multi-objective optimization in python. IEEE Access **8**, 89497–89509 (2020)

5. CEN: Eurocode 3—design of steel structures—. BS EN 1993-1 **1**, 2005 (2006)
6. Cucuzza, R., Rosso, M.M., Aloisio, A., Melchiorre, J., Giudice, M.L., Marano, G.C.: Size and shape optimization of a guyed mast structure under wind, ice and seismic loading. *Applied Sciences* **12**(10), 4875 (2022)
7. Daniūnas, A., Urbonas, K.: Analysis of the steel frames with the semi-rigid beam-to-beam and beam-to-column knee joints under bending and axial forces. *Engineering structures* **30**(11), 3114–3118 (2008)
8. Davison, J., Kirby, P., Nethercot, D.: Rotational stiffness characteristics of steel beam-to-column connections. *Journal of Constructional Steel Research* **8**, 17–54 (1987)
9. Díaz, C., Martí, P., Victoria, M., Querin, O.M.: Review on the modelling of joint behaviour in steel frames. *Journal of constructional steel research* **67**(5), 741–758 (2011)
10. Du, H., Zhao, P., Wang, Y., Sun, W.: Seismic experimental assessment of beam-through beam-column connections for modular prefabricated steel moment frames. *Journal of Constructional Steel Research* **192**, 107208 (2022)
11. Gencturk, B.: Life-cycle cost assessment of rc and ecc frames using structural optimization. *Earthquake Engineering & Structural Dynamics* **42**(1), 61–79 (2013)
12. Guillen-Gosalbez, G., Caballero, J.A., Jimenez, L.: Application of life cycle assessment to the structural optimization of process flowsheets. *Industrial & Engineering Chemistry Research* **47**(3), 777–789 (2008)
13. Jh, H.: *Adaptation in natural and artificial systems*. Ann Arbor (1975)
14. Kirsch, U.: *Structural optimization: fundamentals and applications*. Springer Science & Business Media (2012)
15. Marano, G.C., Rosso, M.M., Melchiorre, J.: Optimization as a tool for seismic protection of structures. In: *Seismic Isolation, Energy Dissipation and Active Vibration Control of Structures: 17th World Conference on Seismic Isolation (17WCSD)*. pp. 100–113. Springer (2023)
16. Melchiorre, J., Manuello, A., Marmo, F., Adriaenssens, S., Marano, G.: Differential formulation and numerical solution for elastic arches with variable curvature and tapered cross-sections. *European Journal of Mechanics-A/Solids* **97**, 104757 (2023)
17. Plevris, V.: *Structural seismic design optimization and earthquake engineering: formulations and applications: formulations and applications*. IGI Global (2012)
18. Rao, S.S.: *Engineering optimization: theory and practice*. John Wiley & Sons (2019)
19. Simoes, L.: Optimization of frames with semi-rigid connections. *Computers & structures* **60**(4), 531–539 (1996)
20. Spillers, W.R., MacBain, K.M.: *Structural optimization*. Springer Science & Business Media (2009)
21. delle infrastrutture e dei Trasporti, M.: *Norme tecniche per le costruzioni (ntc18)*. Decreto Ministero Infrastrutture. GU Serie Generale (42) (2018)
22. delle Infrastrutture e dei Trasporti, M.: *Circolare 21 gennaio 2019 n. 7 cs ll. pp. istruzioni per l'applicazione dell'aggiornamento delle 'norme tecniche per le costruzioni' di cui al dm 17/01/2018. Suppl. Ord. Alla GU n. 35 Del 11/2/19* (2019)
23. Viana, D.D., Tommelein, I.D., Formoso, C.T.: Using modularity to reduce complexity of industrialized building systems for mass customization. *Energies* **10**(10), 1622 (2017)