

Performance analysis of TBM excavation parameters related to small-diameter horizontal and inclined tunnels

Original

Performance analysis of TBM excavation parameters related to small-diameter horizontal and inclined tunnels / Cardu, Marilena; Todaro, Carmine; Farzay, Oveis; Di Giovanni, Alfio; Saltarin, Simone. - ELETTRONICO. - (2024), pp. 1669-1674. (Intervento presentato al convegno ITA-AITES WORLD TUNNEL CONGRESS 2024 (WTC 2024) tenutosi a SHENZHEN, CHINA nel 19-25 April 2024).

Availability:

This version is available at: 11583/2988886 since: 2024-05-21T15:07:20Z

Publisher:

Taylor & Francis

Published

DOI:

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository


Publisher copyright

Taylor and Francis postprint/Author's Accepted Manuscript con licenza CC by-nc-nd

This is an Accepted Manuscript version of the following article: Performance analysis of TBM excavation parameters related to small-diameter horizontal and inclined tunnels / Cardu, Marilena; Todaro, Carmine; Farzay, Oveis; Di Giovanni, Alfio; Saltarin, Simone. - ELETTRONICO. - (2024), pp. 1669-1674. (Intervento presentato al convegno ITA-AITES WORLD TUNNEL CONGRESS 2024 (WTC 2024) tenutosi a SHENZHEN,

(Article begins on next page)

Tunnelling for a Better Life

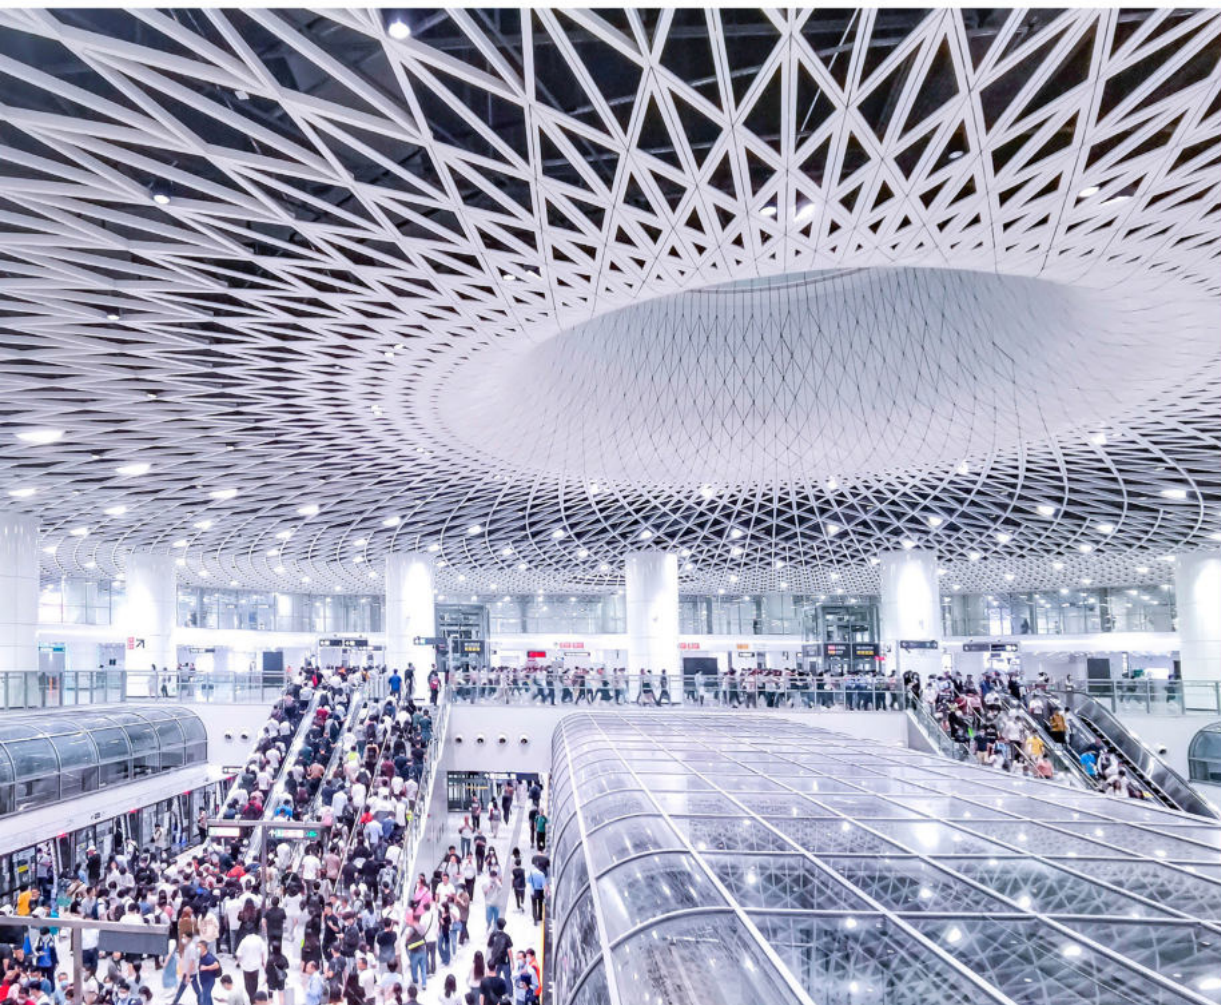

EDITED BY

Jinxiu Yan
Tarcisio Celestino
Markus Thewes
Erik Eberhardt



CRC Press
Taylor & Francis Group

TUNNELLING FOR A BETTER LIFE

Tunnelling for a Better Life contains the contributions presented at the ITA-AITES World Tunnel Congress 2024, which was held from 19-25 April 2024 in Shenzhen, China. As urbanization accelerates, the pivotal role of tunnels and underground spaces in fostering environmental sustainability and improving quality of life becomes ever more pronounced. These underground structures serve as sustainable solutions to the challenges posed by rapid urban growth. By seamlessly integrating into urban landscapes, they alleviate congestion, reduce pollution, and enhance overall mobility, thus contributing to a greener and more sustainable urban environment. Moreover, tunnels and underground works provide vital support for various urban functions, such as accommodating economic activities, providing safe shelters during emergencies or disasters, and facilitating efficient utility management. They address immediate urban needs and lay the foundation for a better and more resilient future.

By focusing on the latest trends in tunnelling and underground engineering, and looking ahead to the era of low-carbon and intelligent technology, the papers in this book illustrate the transformative potential of tunnels and underground works in shaping a better life for present and future generations. The contributions cover a comprehensive range of topics on tunnel engineering, showcasing the latest advancements, insights, and innovations across the following areas:

1. Planning and General Aspects
2. Design and Methodology
3. Geotechnics, Geology and Geophysical Prospecting
4. Ground Stability and Consolidation
5. Support and Lining
6. Conventional Tunnelling
7. Mechanized Tunnelling (TBM, shield)
8. Immersed Tunnels
9. Waterproofing and Drainage
10. Instrumentation and Monitoring/Testing and Inspection
11. Digital and Information Technology
12. Machine Learning
13. Underground Caverns/Underground Space Use
14. Operational Safety, Maintenance and Repair
15. Contractual Practices and Risk Management

Tunnelling for a Better Life is a must-read for professionals, engineers, owners, and other stakeholders worldwide in tunnelling and underground engineering.



Taylor & Francis

Taylor & Francis Group
<http://taylorandfrancis.com>

PROCEEDINGS OF THE ITA-AITES WORLD TUNNEL CONGRESS 2024 (WTC 2024),
19–25 APRIL 2024, SHENZHEN, CHINA

Tunnelling for a Better Life

Edited by

Jinxu Yan

China Railway Academy

Tarcisio Celestino

Universidade de São Paulo

Markus Thewes

Ruhr-University Bochum

Erik Eberhardt

University of British Columbia



CRC Press

Taylor & Francis Group

Boca Raton London New York Leiden

CRC Press is an imprint of the
Taylor & Francis Group, an **informa** business

A BALKEMA BOOK

Designed cover image: Gangxia North Station of Shenzhen Metro Line 14. (c) Shenzhen Metro Group Co., Ltd. Used with permission

First published 2024
by CRC Press/Balkema
4 Park Square, Milton Park, Abingdon, Oxon, OX14 4RN

and by CRC Press/Balkema
2385 NW Executive Center Drive, Suite 320, Boca Raton FL 33431

CRC Press/Balkema is an imprint of the Taylor & Francis Group, an informa business

© 2024 selection and editorial matter, Jinxiu Yan, Tarcisio Celestino, Markus Thewes and Erik Eberhardt; individual chapters, the contributors

Typeset by Integra Software Services Pvt. Ltd., Pondicherry, India

The right of Jinxiu Yan, Tarcisio Celestino, Markus Thewes and Erik Eberhardt to be identified as the authors of the editorial material, and of the authors for their individual chapters, has been asserted in accordance with sections 77 and 78 of the Copyright, Designs and Patents Act 1988.

The Open Access version of this book, available at www.taylorfrancis.com, has been made available under a Creative Commons Attribution-Non Commercial-No Derivatives (CC-BY-NC-ND) 4.0 license.

Although all care is taken to ensure integrity and the quality of this publication and the information herein, no responsibility is assumed by the publishers nor the author for any damage to the property or persons as a result of operation or use of this publication and/or the information contained herein.

British Library Cataloguing-in-Publication Data

A catalogue record for this book is available from the British Library

Library of Congress Cataloging-in-Publication Data

A catalog record has been requested for this book

ISBN: 978-1-032-80042-4 (hbk)

ISBN: 978-1-032-80113-1 (pbk)

ISBN: 978-1-003-49550-5 (ebk)

DOI: 10.1201/9781003495505

Table of contents

| | |
|--|--------|
| Preface | xxxvii |
| Acknowledgements | xxxix |
| WTC 2024 Organization | xli |
| <i>Planning and general aspects</i> | |
| Multilateral institutions and governance of urban underground space <i>N. Bobylev, Y.-K. Qiao & F.-L. Peng</i> | 3 |
| Forecast and trends related to key personnel for mechanised excavation with TBMs <i>F. Bove</i> | 8 |
| The common duct in New Taipei City <i>H.C. Chao, C. Song, T. Ko, I.K. Chiu & Y.C. Lin</i> | 13 |
| Progress and prospect of urban tunnel engineering in China <i>X. Chen</i> | 20 |
| New chemicals with reduced carbon footprint <i>F. Couturier, D. Matioszek & T. Boursier</i> | 28 |
| City Rail Link – City Rail Link: Managing challenges on the pioneer underground metro project in New Zealand <i>F. Dudouit</i> | 33 |
| Nuclear decommissioning in the UK: Cross-sector collaboration and learning with the tunnelling and underground space sector investigating alternative approaches to reactor dismantling and graphite retrievals <i>D. Garbutt & M. Knights</i> | 41 |
| Planning of alignment & proposed actions for tunnel collapse in diverse ground conditions on the steepest railway curves in the Eastern Ghats, India <i>R. Gupta, L. Kumar & A. Kumar</i> | 47 |
| Comparison of carbon footprint emissions in tunneling projects using innovative methods <i>P. Jarast & V. Nasri</i> | 57 |
| Collaboration in Moscow Metro development: Analysis of joint construction efforts by Russian and Chinese builders <i>V.P. Kivlyuk, A.I. Paschenko, D.S. Konyukhov, L. Xue, J. Zhou, S.N. Vinogradov, K.V. Orlov, Y. Song, J. Huo, Y. Lyu, Z. Gu & T. Wang</i> | 65 |

| | |
|---|-----|
| The application of technology for resource utilization, reduction, and harmless treatment of subway shield tunneling waste soil | 72 |
| <i>J. Lei, H. Long, K. Jia, T. Song & H. Pan</i> | |
| Development and prospects of railway tunnels in China | 78 |
| <i>X. Li, S. Tian, W. Wang, J. Gong & H. Wang</i> | |
| Differentiated driving effects of China's green transportation facilities assessment policy | 87 |
| <i>Y. Liu & W. Qiu</i> | |
| Planning and execution of horizontal directional coring method for future tunnelling works | 96 |
| <i>F. Mahony, K. Goh & C. Veeresh</i> | |
| Theory meets practice: Evaluating discrepancies between theoretical settlement projections and actual measurements in tunnelling projects with tunnel boring machines | 101 |
| <i>E. Navarro, E. Salvador & F. Diez</i> | |
| Geotechnical and tunnel engineer's role on the success of major tunnel projects delivery | 109 |
| <i>J. Pan, D. Och, A. Kuras & G. Bateman</i> | |
| TBM traffic tunnels for sustainable infrastructure | 116 |
| <i>S. Pompeu-Santos</i> | |
| Underground space use layout planning using multi-source spatial data | 125 |
| <i>Y.K. Qiao, Z. Y. Li, N. Bobylev & F.L. Peng</i> | |
| Tunnelling in a green country – Brenner Base Tunnel study case: Decision and solutions in construction lot H41 Sill Gorge-Pfons | 132 |
| <i>I. Zamberlan & C. Schwarz</i> | |
| Technical challenges and countermeasures of plateau railway tunnels | 139 |
| <i>Y. Zhao, T. Zhu & G. Yan</i> | |
| <i>Design and methodology</i> | |
| Observational method and calibration of design safety factors to optimize technical-economical solutions in tunnelling projects | 149 |
| <i>A. Antiga, M. Lorenzi & A. Lucia</i> | |
| Design of Ontario Line South Tunnel | 158 |
| <i>M. Bakhshi, V. Nasri, T. Maalouf</i> | |
| Design challenges in conventional tunnelling on the Sotra Link Project in Norway | 164 |
| <i>G. Barbieri, G. Bella, E. Trivellato, S. Agrillo & M. Giani</i> | |
| (I)-TM: I-System's tunnelling method – four years of application in most challenging ground in India | 173 |
| <i>H. Bineshian</i> | |
| Segment design for Australia's largest diameter TBM tunnel | 182 |
| <i>S.F. Chau, H. Asche, D. Oliveira, J. Shepherd & C. D'Hondt</i> | |
| Review of key technologies for design of Dalian Bay Undersea Tunnel | 193 |
| <i>Z. Chen, H. Chen & M. Lu</i> | |
| Design of tunnel brace and retaining structure on East Artificial Island of Shenzhen-Zhongshan Link | 200 |
| <i>H. Chen, C.N. He, X.D. Lai & L. Yu</i> | |

| | |
|---|-----|
| Sustainability of Shihmen reservoir by desilting tunnel in Taiwan <i>C.E. Chiang, P.S. Kuo, H.T. Chiang & Y.J. Lin</i> | 209 |
| Advanced countermeasure for encountering heavy gas influx in new Wu-shan-ling divert water tunnel <i>K.H. Chou, S.H. Wang, C.H. Chen & T.H. Chen</i> | 214 |
| The “hybrid” tunnel. An innovative solution for urban tunnel in soils. The case of Américo Vespucio Oriente AVO1, in Santiago de Chile <i>J.M. Galera, M. de Cabo & G. Ibarra</i> | 220 |
| The effect of the movement joint on the seismic response of the cross-passage intersection in segmental tunnel lining <i>G. Giordano, D. L’Amante & G. Fantauzzi</i> | 228 |
| Development of sustainable criteria for the Italian railway tunnel design <i>F. Iacobini & A. Pranno</i> | 235 |
| Analysis on applicability of seismic calculation methods for shield tunnel in Shanghai area <i>X.X. Li & H. Chen</i> | 240 |
| Validation of joint non-linear numerical analysis with large-scale physical testing for arched cut and cover tunnels at HS2 project (UK) <i>M. Li, S. Psomas & N. Al Haddid</i> | 247 |
| Innovative application of low-carbon and energy-saving technology in underground space: A case study of erlangshan tunnel on Sichuan-Tibet expressway <i>G. Lin, J. Zheng, J. Wang & F. Yang</i> | 256 |
| Low carbon emission design concept and method for tunnels and underground engineering <i>G. Lu, J. Liu, Y. Zhao, S. Shi & Z. Zhang</i> | 261 |
| Design of the REM Aéroport de Montreal’s P5 ventilation shaft <i>M. Mains, J. Lee & V. Nasri</i> | 270 |
| Tunnels and stations design of Montreal Blue Line <i>V. Nasri</i> | 277 |
| Influence of calculation method on the design of the secondary lining <i>J. Ortuta & M. Bakoš</i> | 285 |
| Research on smart design and innovation of Jiaozhou bay second tunnel <i>L. Qu, X. Li, M. Tan, H. Jiang, M. Xiao & W. Sun</i> | 292 |
| Application of a confinement-dependent spalling criterion for tunnels in highly stressed brittle rock <i>M. Rahjoo & E. Eberhardt</i> | 300 |
| Practical considerations of shale swelling impact on underground structures liner design for Ontario Line transit project in Toronto, Canada <i>M. Rahjoo & V. Nasri</i> | 308 |
| How to consider the effects of longitudinal joint imperfections on internal forces in segmental tunnel linings <i>F. Rauch & O. Fischer</i> | 315 |
| Athens metro “Piraeus” station: Numerical analysis versus observational method <i>K. Sampsakis-Bakopoulos & N. Gerolymos</i> | 323 |

| | |
|--|-----|
| Karanga-a-Hape Station MC21 Junction – Collaborative solutions for complex geology and geometrical constraints - Tackling the challenges at Karanga-a-Hape Station caverns <i>A. Sarathchandran, G. Charlesworth & R. Graafhuis</i> | 329 |
| Design of temporary cofferdam and deep excavation for cofferdam tunnel of Shenzhen-Zhongshan Link <i>Z. Shi, C.N. He, L. Yu & Q.W. Xia</i> | 337 |
| Comparative effects of twin-stacked tunnel excavation on adjacent structure using different simulation models <i>N. Sittiamornporn, P. Jongpradist, C. Phutthananon, A. Chayaroon & P. Malaisree</i> | 345 |
| Key technology of Submarine railway tunnel in complex environment and high-water pressure <i>C. Song, W. He, S. Lv & Y. Yu</i> | 352 |
| Development and innovation of design method for railway tunnel support system in China <i>S. Tian, D. Liu, Y. Zhang & X. Li</i> | 360 |
| Maungawhau mined tunnels - Collaborative design – Management of design amendments for Maungawhau mined tunnels for improved construction schedule outcomes <i>H. Toi, R. Gong, D. Wang & G. Charlesworth</i> | 368 |
| “SINTEF-TriPOD” in underground design – A demonstration for two projects in Norway <i>N. Trinh & E. Grov</i> | 377 |
| Automatic computation for design of tunnel shafts <i>C.K. Tsang, A. Koay & T. Sia</i> | 385 |
| Case study about adjacent three-arch tunnel <i>H. Tseng, K. Kuo & T. Chu</i> | 390 |
| Optimizing the tunnel ventilation design related to respirable dust in tunnelling by using CFD <i>R. Wei, R. Galler & C. Weiß</i> | 396 |
| Study on the mechanism of tunnel structure damage under the combined effects of fault creep and earthquakes <i>Z. Xia, S. Jia, J. Wang & Q. Wang</i> | 402 |
| Theory and practice of total safety factor method for tunnel support structure design <i>M. Xiao, B. Xie, C. Xu, K. Wang & Z. Deng</i> | 406 |
| Considerations of the coefficient of subgrade reaction forces on seismic response displacement method of a double-circular shield tunnel <i>M. Xu & T. Manabe</i> | 416 |
| Analysis of key technologies in structural design of prefabricated station of Shenzhen Metro <i>Z. Xu, D. Meng, R. Liu & M. Li</i> | 424 |
| Addressing design challenges in large diameter tunnels with big openings in deep soft ground: Innovative solutions and analysis techniques <i>J. Yuan, V.C.S. Goh & C. Maxcia</i> | 432 |
| Aseismic mechanism of laminated shear energy dissipation structure in tunnels during an earthquake <i>X. Zhang, A. Cao, Y. Jiang & X. Wang</i> | 441 |

Geotechnics, geology and geophysical prospecting

| | |
|---|-----|
| An improved simplified solution for the characteristic line of tunnels in strain-softening rocks <i>M. Anthi, Th. Pferdekämper & G. Anagnostou</i> | 451 |
| Estimation of tunnel support loads due to large deformation in squeezing ground conditions <i>K. Arora & M. Gutierrez</i> | 457 |
| Tunnelling in weak sandstone: A case study of Subansiri Lower Hydroelectric Project (2000 MW) <i>M.S. Chouhan & S. Potnis</i> | 467 |
| Correlation of empirical classification systems in squeezing anisotropic environment and optimisation of underground supports in a headrace tunnel; a case study from Tanahu Hydropower, Nepal <i>E. Christakis, B. Parajuli, P. Yao & R.K. Adhikari</i> | 476 |
| Hydro-geo-mechanical properties for water flow prediction in tunnelling <i>M. Coli & R.E. Rizzo</i> | 485 |
| 3D Geological reconstruction and application of tunnel face <i>D. Duan, H. Bai, W. Li & W. Qiu</i> | 493 |
| Study of microgravity survey to predict the Bukit Timah rock head for tunnelling in Singapore <i>T.E.S. Ernest, C. Veeresh, J. Kumarasamy & K.H. Goh</i> | 501 |
| Rock drilling aerosol deslagging technology and CFD-DEM two-way coupling numerical simulation of weak surrounding rock geology <i>S. Guo</i> | 509 |
| Uninterrupted continuous forecasting in mechanized tunnelling in rock <i>J. Hecht-Méndez, T. Dickmann & D. Krueger</i> | 517 |
| Limits on the estimation of the EPB face pressure. A concrete example based on Kalman filter approach <i>C. Iasiello, A. Flor & P. Fantini</i> | 523 |
| Experimental study of rheological characteristics of bentonite-based drilling fluids <i>S. Javarone, M. Palombini, M. Cinelli, I. Bavasso & D. Sebastiani</i> | 529 |
| Optimized electrical exploration for predicting geological transitions ahead of a tunnel based on harmony search algorithm <i>M. Kang, K. Kwon, S. Park, Y. Choe & H. Choi</i> | 536 |
| High resolution resistivity imaging for assessment of geological conditions ahead of tunnel face in a complex geology <i>S.L. Kapil</i> | 542 |
| Tunnel engineering application of assessment technology of karst development degree based on hydrochemical kinetics and fractal theory <i>C. Li, J. Wu, Q. Li, W. Yu & S. Lu</i> | 548 |
| Model test and analysis of failure mechanism of deep high sidewall tunnel from splitting failure to zonal disintegration <i>F. Li, Q. Zhang, G. Xin & G. Long</i> | 556 |
| Development and test of directional coring drilling system for advanced geological exploration <i>J. Liu</i> | 565 |

| | |
|---|-----|
| Geological risks in TBM tunneling and its prediction by HSP method <i>S. Lu, Y. Xiao & X. Wang</i> | 572 |
| Rock abrasiveness in the studies of são paulo metro: Tests, classification systems, parameters obtained from various lithotypes and their relationship with weathering degree <i>M.D. Monteiro, H.C. Rocha, G.B. Robbe & A.M. de Almeida</i> | 579 |
| Phased prediction method for construction period of secondary lining construction time of tunnel in squeezed rocks <i>L. Ning</i> | 584 |
| Ground characterisation of the Sydney Basin for tunnelling works <i>D.J. Och, J. Pan, I.T. Graham, N. Walker, A. Kuras & G. Alvarado</i> | 591 |
| Chengdu-Guiyang High-speed railway—Yujingshan Mountain Tunnel crossing giant karst cave and underground river <i>W. Qing, Y. Yu, J. Zheng, Y. Zhu & Y. Wang</i> | 598 |
| Tunnel behavior in soft soils subjected to pore water pressure drawdown <i>A. Santos, R. Pérez-Léon, J. Rodríguez-Rebolledo & B. Caicedo</i> | 608 |
| The deformation characteristics of soft soil layers with different sand content and the time and space effects of foundation pit excavation on the tunnels below <i>C. Shen, M. Miao, C. Huang, Y. Dong & J. Fan</i> | 616 |
| Non-invasive tunnelling investigations using muon tomography <i>C. Steer & L.F. Thompson</i> | 625 |
| Empirical correlations between ground's mechanical properties and I-system <i>C. Upadhye, S. Potnis & B. Hoss</i> | 629 |
| Research on key technology of design of long tunnel in water-rich karst platform of compound syncline basin <i>H. Wang, M. Wang, H. Fu, P. Li & Z. Li</i> | 638 |
| Numerical simulation of the mechanism of strain rockburst under true triaxial loading and unloading conditions <i>Y. Xue & H. Tian</i> | 647 |
| Sequential 3D geological information system using re-grid of voxel model based on exploration data ahead of the tunnel face <i>S. Yoshikawa, Y. Aono, K. Saito & T. Nishi</i> | 655 |
| HSP Method-based advanced geological prediction and tunneling parameter pre-control technology for super-large diameter pipe-jacking project <i>Z. Zhao, F. Lan, B. Wang, L. Meng, X. Wang & S. Lu</i> | 660 |
| <i>Ground stability and consolidation</i> | |
| Excavation induced settlement in Sydney area <i>G. Alvarado, S. Sadeghian & Y. Dong</i> | 671 |
| A modified approach to assess tunnel excavation stability <i>S. Anwar & G. Charlesworth</i> | 678 |
| Study on crosslink-induced Xanthan Gum biopolymer treated soil as a subsea tunnel backfill grout for saline condition permeability control <i>J. Bang, D.-Y. Park, J. Kim, S. Im & G.-C. Cho</i> | 685 |

| | |
|---|-----|
| Fixing of unstable water-saturated soils by artificial freezing for construction of inter-tunnel joints during metro construction | 689 |
| <i>E.A. Deplagni, V.P. Kivliuk & D.S. Konyukhov</i> | |
| Factors impacting thawing-refreezing around tunnels in permafrost soils | 695 |
| <i>S. Gavhane & S. Potnis</i> | |
| Deformation characteristics of long and narrow deep foundation pit with partition walls | 705 |
| <i>H. Geng, S. Guan, Z. Chen, G. Dai & Z. Li</i> | |
| Disturbance effect and surrounding rock pressure characteristics of loess shield tunnels | 711 |
| <i>X. Han, P. Wang, Z. Chen, H. Feng, H. Cui & F. Ye</i> | |
| Numerical simulation of polymer grouting for rock fracture: Influence of isocyanate index on grout propagation | 718 |
| <i>M. Hao, J. Zhang, L. Zou & X. Li</i> | |
| Dynamic soil response around a shallow rectangular tunnel and adjacent building | 726 |
| <i>Z. He & S.P. Gopal Madabhushi</i> | |
| Chemical-combined jet grouting for mass treatment of break-in area in Vietnamese urban underground construction | 732 |
| <i>H.Q. Le, H. Oyama & P.N. Do</i> | |
| A systematic deformation control methodology for underground space construction in close proximity to an existing metro station | 740 |
| <i>J. Li, R. Wen, W.W. Yang & W.F. Mou</i> | |
| Study on diffusion mechanism of backfill grouting in sand and clay stratum | 747 |
| <i>S. Li, F. Ye, T. Xia, K. Ying & X. Han</i> | |
| Influences of stress-dilatancy rule on the derivation of ground response curve for deep-buried tunnels | 755 |
| <i>J. Liang, J. Chen, J. Ma, H. Yang & L. Huang</i> | |
| The use of jet grouting technology: An overview of the different applications in tunnelling | 760 |
| <i>P. Lunardi, G. Lunardi, G. Cassani, M. Gatti, L. Bellardo & C.L. Zenti</i> | |
| Stability analysis of surrounding rock in a highway tunnel crossing a Water-Rich fault fracture zone | 769 |
| <i>S. Luo, X. Xie & D. Zhu</i> | |
| Selection of an ontological model for phyllite tunnel based on on-site measured | 777 |
| <i>J. Ma & J. Zhang</i> | |
| Analysis of stability of rock column between cut & cover metro station and NATM tunnels | 783 |
| <i>S. Maiti, M. Khare & S. Potnis</i> | |
| The freezing technique for the world's longest railway tunnel | 789 |
| <i>A. Marottoli, M. Ianeselli, R. Marrazzo, A. Gallotto, G. Vecchione, M. Cavolo & F. Gallo</i> | |
| Stability of portal slopes of a diversion tunnel after the Kahramanmaraş, Turkey (Türkiye) February 6, 2023 Earthquakes | 798 |
| <i>A.A. Mert & F. Caliskan</i> | |
| Numerical analysis of the deformation of undersea tunnel crossing fault zone | 806 |
| <i>J. Ni, J. Zhang, H. Huang, D. Zhang, & L. Zhang</i> | |

| | |
|--|-----|
| Research on surrounding rock by shallow tunnelling in Boulder-Cobble Mixed formation: Instability characteristics and control strategies | 813 |
| <i>Y. Qin</i> | |
| Practical approach for the control of surface settlements due to TBM tunnelling during excavation by following up of monitoring | 822 |
| <i>V. Rattia, H. Rocha, A. Dantas, T. Mendes & A. Assis</i> | |
| Jet grouting soil improvement to excavate a tunnel under passing the A4 Milano-Venezia motorway for the extension of the line 1 of the Milan metro | 828 |
| <i>M. Silvestri, D. Chirulli, A. Antiga & P. Coppola</i> | |
| Study on the mechanical behavior of the vertical pre-reinforcement | 836 |
| <i>Y. Tatebayashi, N. Tamura, T. Amemiya, K. Kawata & N. Isago</i> | |
| Marble sludge in two-component grout applications | 842 |
| <i>C. Todaro, A. Carigi, M. Cardu & D. Peila</i> | |
| Study of support design and construction results of unconsolidated in Aso Caldera | 848 |
| <i>T. Tomita, T. Ano, H. Nagamatsu, H. Hirano & H. Tabata</i> | |
| State of the art of soil conditioning technology for earth pressure balance shield tunnelling | 857 |
| <i>Z. Wan, S. Li, S. Zhao, K. Qiu & S. Hao</i> | |
| Numerical prediction of tunnelling-induced displacement field in large and very shallow tunnels | 865 |
| <i>W. Yang, D. Zhang & D. Boldini</i> | |
| Stability numerical investigation of laminated and randomly discontinuous flat roof | 871 |
| <i>P. Yiouta-Mitra & E. Vougioukas</i> | |
| Responses of a shallow tunnel in liquefiable ground subject to multiple shakings | 877 |
| <i>J. Zhang, E. Bilotta, Y. Yang & Y. Yuan</i> | |
| Failure mechanism of reinforced faces and design method of advanced supports for tunnels excavated by the full-face mechanized method | 882 |
| <i>X. Zhang, M. Wang & L. Yu</i> | |
| Key technologies and safety analysis of deep foundation pit construction in a sea area | 890 |
| <i>Z. Zhao & S. Gao</i> | |
| Data-driven stability analysis and uncertainty quantification of surrounding rock mass for tunnel | 897 |
| <i>H. Zhao & L. Zhang</i> | |
| Study on settlement deformation of existing structures under ultra-large diameter shield tunnel | 906 |
| <i>M. Zou, C.L. Zhen & X. Xie</i> | |
| <i>Support and lining</i> | |
| Rock bolt design, A numerical parametric study | 917 |
| <i>S. Anwar, A. Mann & S. Sadeghian</i> | |
| The effect of a frictional interface in a preliminary yielding support for a deep tunnel | 926 |
| <i>L. Batocchioni, V. González & S. Miliziano</i> | |
| Numerical calculation approach for the design of segmental tunnel lining equipped with inflatable O-ring sealing | 932 |
| <i>M. Bazzani, F.D. Santis, P. Fantini, M. Daniele & S. Pesa</i> | |

| | |
|---|------|
| The mechanism, functioning and installation of reinforced ribs of shotcrete in Norwegian Method of Tunnelling (NMT) | 941 |
| <i>R. Bhasin & M. Shabanimashcool</i> | |
| Shotcrete structural behaviours as tunnel support in hard jointed rocks – Swedish state of the art | 946 |
| <i>Y. Chang & C. Höök</i> | |
| Study on the influence of cracks on mechanical behaviors of tunnel lining of high speed railway with a speed of 400 km/h | 953 |
| <i>P. Chen, K. Liu & C. Yan</i> | |
| Design and verification of shear key support system for segmental lining openings at cross passages using non-linear finite element model | 962 |
| <i>J.T. Chong</i> | |
| Environmental and economic advantages in using HPFRSCC in tunnelling | 969 |
| <i>M. Coli, M. Francini, L. Martelli & M. Tanzini</i> | |
| Structural and sustainability requirement with high performance fibre reinforced precast segment carbon counting example | 977 |
| <i>B. de Rivaz</i> | |
| Research on reinforcement measures for soft plastic loess tunnel base | 983 |
| <i>Q. Deng</i> | |
| Analytical solution to failure history of segment joint with inclined steel bolt | 991 |
| <i>X. Dong, B. Du & X. Chen</i> | |
| Numerical analysis of two deep circular shafts at a former gas works site on the London Power Tunnels Phase 2 scheme | 1000 |
| <i>J. Ellis, O. Brown, A. Simic, R. Kundan & J. Coupland</i> | |
| Comparative analysis of simplified solutions for the radial joint behaviour of segmental tunnel linings with finite element numerical modelling | 1008 |
| <i>A. Emadi & A.R. Gomes</i> | |
| Steel lining support in headrace tunnel of Uma Oya Project, Sri Lanka | 1015 |
| <i>A.R. Farshbar, A. Noorzad, P.V. Yuvaraju & B. Rejith Kumar</i> | |
| Durability of two-component backfill grout: An experimental study | 1021 |
| <i>M.D. Felice, A.D. Giulio & N. Valiante</i> | |
| Tangential resistance between primary and secondary lining with PVC waterproofing sheet membrane | 1027 |
| <i>L. Forlingieri, C. Hu, M. Morosi & A. Zanichelli</i> | |
| Carbon reduction in conventional tunnelling by advanced design | 1036 |
| <i>A. Gakis, P. Salak & F. Wilhelmstoetter</i> | |
| Advanced joint non-linear design analysis and verification of the arched cut and cover tunnels at high speed 2 project (UK) | 1044 |
| <i>N.A. Haddid, S. Psomas & M. Li</i> | |
| The stiffness of circular joints and its effect on the deformation of the tunnel segmental lining along the longitudinal direction | 1053 |
| <i>X. Han, F. Ye & P. Oreste</i> | |

| | |
|--|------|
| Comparison of structural load-bearing performance between precast and cast-in-place permanent linings <i>K. Kikuchi, A. Kusaka, Y. Koizumi, T. Watanabe & Y. Tatsumi</i> | 1062 |
| Development and application of highly adaptable lining equipment for complex tunnels with variable sections <i>J. Liu</i> | 1071 |
| Mechanism of anchor cable in super-span tunnel and its design method <i>J. Liu, G. Lu, Y. Zhao & S. Shi</i> | 1078 |
| Using orthogonal flexible support structure to deal with large deformation of soft surrounding rock tunnel: A case study <i>Y. Liu & W. Qiu</i> | 1086 |
| Study on railway tunnel lining anti-crack surface reinforcement strengthening and design method <i>Z. Liu, X. Xing & L. Gong</i> | 1092 |
| An innovative primary support system of steel shotcrete composite structure in the tunnel <i>J. Lu & M. Li</i> | 1098 |
| Stress analysis of high geothermal tunnel lining structures considering different cooling measures <i>M. Luo, Z. Yuan, L. Fan, L. Tao & Y. Zeng</i> | 1105 |
| Thrust jack loading of large diameter precast segmental tunnel lining <i>M.A. Mooney, H. Zheng, C. Naito, S. Quiel & Z. Ouyang</i> | 1112 |
| Computational approaches towards segmental linings with a reduced environmental impact <i>G.E. Neu, V. Gudžulić & G. Meschke</i> | 1118 |
| Snowy 2.0 - Support design for intersections between access tunnel and caverns <i>X.-P. Nguyen, P.-L. Tonioni, A.-N. Blaise, R. Taherzadeh, D. Galli & G. Cardone</i> | 1126 |
| Research on high-quality and high-durability of tunnel lining by mixing volcanic glass powder <i>M. Nomura, S. Tomoto, T. Shiina, N. Mitsui, S. Yoshida & D. Hanaoka</i> | 1135 |
| Achieving high load-bearing capacity linings in sprayed concrete and segmental linings with high-performance steel fibres <i>D. Oliveira</i> | 1144 |
| EN 14488-3 notched panel versus EN 14651 notched beam testing for pre-construction trial conformance testing of Sprayed Concrete Linings (SCL) <i>C. Peaston & B.D. Rivaz</i> | 1151 |
| Tunnel lining design in hard rock conditions. application of observation method. A case study of a large-scale tunnel cavern for underground train station <i>M. Petkov, P. Hansson & J. Pilbacka</i> | 1159 |
| Risk assessment and large diameter segmental lining design in swelling ground <i>S. Sánchez, M. Mains, C. Álvarez, E. Barrouillet, C. Garrido & M. Ferreres</i> | 1167 |
| The numerical analysis for the segments floating mechanism of the large-diameter shield tunnel in the Rich Water Strata <i>Z. Shi, J.-F. Xu & X.-Y. Xie</i> | 1174 |

| | |
|---|------|
| Analysis of composite shell lining based on laminated theory <i>W. Shuyi</i> | 1183 |
| Singapore's land transport authority: 25 years of sprayed concrete lining tunnelling <i>A. Sim, K.B. Chang, M. Marotta, C.K. Poh & M. Mohiadeen</i> | 1189 |
| Design of precast bolted universal segmental tunnel lining for the London Power Tunnels phase 2 scheme <i>A. Simic, O. Brown & J. Ellis</i> | 1199 |
| Value engineering of concrete mix to save 230 tonnes of steel fibre for the west section of the Thames Tideway Tunnel <i>J. Su, S. Sheth, A. Ellison & C. Barret</i> | 1207 |
| Dynamic response characteristics of ultra-shallow buried metro station structures under surface vibration load <i>L. Tao, L. Deng, Y. Zhang & Z. Jia</i> | 1216 |
| Mechanical response and fault-resistant design of urban shallow subway tunnel under normal fault <i>L. Tao, J. Liu, Z. Wang & M. Shi</i> | 1224 |
| Analytical solution for longitudinal response of cross-fault mountain tunnels based on foundation beam model <i>L. Tao, M. Qiu, H. Zhang, Z. Jia, C. Shi</i> | 1231 |
| Experimental study on mechanical properties of grouted π -type SCCS arch <i>Z. Wang, W. Li & Y. Cai</i> | 1238 |
| Study on deformation joint width of mining tunnel under the operation of a normal fault <i>Q. Wang, D. He, J. Chen, P. Geng & H. Shen</i> | 1244 |
| Analysis of issues in the theory and calculation methods of composite lining for hard rock tunnels <i>N. Wang & X. Yang</i> | 1250 |
| Analysis of mechanical behavior and engineering suggestions for double-arch tunnel without middle drift <i>C. Wang, D. Zhang & Y. Li</i> | 1258 |
| A mechanical analysis model for tunnels crossing active fault zones <i>M. Wang, X. Zhang & L. Yu</i> | 1267 |
| Study on mechanical characteristics of a DDCI connection structure for longitudinal joints <i>M. Xiao, J. Chen, G. Xue, Z. Yan & S. Wang</i> | 1276 |
| Research on support parameters of the second Jiaozhou Bay Subsea tunnel based on the total safety factor method <i>M. Xiao, W. Sun, L. Chen & L. Jin</i> | 1282 |
| Research on the airproof performance of shield tunnel segment sealing gasket based on laser surface microstructure <i>M. Xiao, G. Xue, J. Chen, C. Zhang & S. Wang</i> | 1291 |
| Research on the application of marine engineering mass concrete with anti-cracking agent <i>B. Xie, W. Xu, Y.J. Wang, J. Zhang, W. Jin & J. Liu</i> | 1297 |

| | |
|--|------|
| Development and application of wall-climbing grinding robot for tunnel lining steel formwork <i>K. Yan</i> | 1303 |
| Retrospective analysis of the design and manufacture of a case of steel fibre reinforced segmental lining in view of the actual behaviour of some rings on site <i>Z. Yang, Z. Gu & P. García de Haro</i> | 1312 |
| Robustness evaluation on non-circular segmental tunnel linings: Case study on quasi-rectangular shield tunnel <i>Y. Ye, Z. Liu & X. Liu</i> | 1321 |
| The effect of polypropylene fiber on the strength and crack propagation of foam concrete <i>R. Yin, Q. Li, X. Zeng & W. Qiao</i> | 1326 |
| Research on construction technology of drilling and blasting tunnel based on load adjustment control technology <i>G. Ying, R. Zheng, Y. Xing & W. Chen</i> | 1333 |
| Construction and applicability of using double supports in a large overburden ground conditions as a countermeasure to suppress displacements <i>S. Zhai, D. Abeyawardena, H. Aoki, S. Ohmori & N. Isago</i> | 1340 |
| Mechanical evolution mechanism of primary support under steel arch frame corrosion in subsea tunnel <i>Y. Zhang, S. Tian, M. Wang & L. Yu</i> | 1347 |
| Effect of excavation on the pipe roof deformation under the action of the pipe roof-beam support system <i>W. Zhao, Q. Bai & D. Pi</i> | 1356 |
| Study on horizontal earth pressure of segment considering the influence of backfill grouting pressure <i>J.-L. Zhong, X.-C. Zhong, Y.-Z. Jian & F.-D. Li</i> | 1365 |
| Impact of base rock deterioration on the mechanical characteristics of loess-expansive mudstone tunnel lining structure <i>H. Zhu</i> | 1373 |
| <i>Conventional tunnelling</i> | |
| Crystalline silica exposure in tunnel construction: Identifying barriers to safe practices <i>F. Anlimah, V. Gopaldasani, C. MacPhail & B. Davies</i> | 1383 |
| Design and construction optimisation of the Karanga-a-Hape Station mined tunnels and bored tunnel cross passages on the City Rail Link project <i>V. Balakumarsingham, P. Daudibertières, E. Chatoux & W. Okada</i> | 1390 |
| Experiences during tunnelling in extreme ground conditions in the Himalayas - Excavation of Rohtang Tunnel, India <i>R. Bernard</i> | 1399 |
| The impact of ramp width on tunnel face stability during ramp excavation <i>Q. Chen & Y. Cui</i> | 1405 |
| Deep underground mined cavern excavations in Auckland city centre, New Zealand <i>T. Cheung, W. Okada & S.F. Chau</i> | 1412 |

| | |
|---|------|
| Construction of Girgaon Station of Mumbai metro line – 3, a combination of cut & cover and conventional tunnelling and mix of social and technical challenges in congested urban environment | 1418 |
| <i>S.G. Dalvi, R.R. Kumar, S.K. Gupta & A. Rawat</i> | |
| Challenges in the conventional tunnel mixed-face execution | 1424 |
| <i>T. de Sá Lima, B. Scodeler & E.P. Filho</i> | |
| Research on key technologies for the construction of extra long tunnels on green roads in karst peak cluster areas | 1429 |
| <i>Z. Dong, B. Guo, Y. Zhou, Mengyan & S. Xing</i> | |
| Challenges and lessons learned from 100 km of major hydropower tunnels in Bhutan | 1437 |
| <i>T. Dorji, D. Brox & S. Wangdi</i> | |
| Design and construction considerations for cross passages in Bangkok subsoil | 1446 |
| <i>O. Duangsano, A. Sramoon, A. Asanprakit, A. Chayaroon & N. Phienwej</i> | |
| Construction of underground rail tunnel above deep tunnel sewerage system | 1455 |
| <i>H.M. Fong, Q. Li & C. Veeresh</i> | |
| A study of merits and demerits of steel decking verses concrete decking for traffic management and construction logistics during construction of underground metro stations for Colaba-bandra-seepz (line 3) in Mumbai, India | 1461 |
| <i>S.K. Gupta, R.R. Kumar, D. Binnar & S. Vishwakarma</i> | |
| Automatic blasting design and construction system optimized for geological conditions | 1469 |
| <i>R. Hemmi, Y. Ide, K. Kakimi, T. Shizawa & F. Ito</i> | |
| Effect of focusing tube geometry and abrasive flow rate on rock drilling width | 1475 |
| <i>H.-J. Hwang, Y. Cha, J. Kim, C. Park & G.-C. Cho</i> | |
| Development of advanced tunnel blasting and shotcrete as automated tunnel construction system | 1479 |
| <i>K. Iwano, T. Aoyagi, T. Yamagishi, T. Mega & T. Inuzuka</i> | |
| Unforeseen excavation of mixed face soil conditions in a hard rock drill and blast road tunnel | 1486 |
| <i>P.D. Jakobsen, H. Nilsen & A.K. Lund</i> | |
| Evaluation of removable time of tunnel lining formworks using surface wave techniques | 1492 |
| <i>K. Kato, C. Kuroda, N. Utagawa & K. Ohno</i> | |
| Construction of desilting chambers and connecting tunnels for Vishnugad Pipalkoti He Project (444mw) in adverse geological conditions and very remote location - A case study | 1499 |
| <i>R.K. Khali</i> | |
| Construction of tunnel T-49A on Dharam – Qazigund section of Udhampur-Srinagar-Baramulla New BG railway line project in highly adverse geological conditions- A case study | 1507 |
| <i>R.K. Khali & S. Yalal</i> | |
| Construction of a new tunnel in proximity to an in-service tunnel by implementing measures to control blasting vibration and ground displacement | 1517 |
| <i>Y. Kobayashi, T. Ishii, T. Koma, K. Nakano & Y. Kinomura</i> | |
| Cross passage tunnel excavation by core cutting machine (Stitching) and hydraulic rock splitters in hard rock at Mumbai Metro Station Line-03 (Aqua Line) | 1526 |
| <i>A. Kumar Saw, S. Potnis, M.J.C. & M. Roy</i> | |

| | |
|--|------|
| Test and research on load spectrum of tunnel drill jumbo <i>X. Liu</i> | 1532 |
| Experimental study of step method construction in soft and broken surrounding rock section of super-long and large section tunnels <i>Y. Liu, Y. Wang, T. Zhu, M. Tian & Q. Cheng</i> | 1540 |
| Innovative practice of mechanized and intelligent construction technology for railway mountain tunnel drilling and blasting method <i>K. Liu, Y. Yu, Y. Li & X. Liu</i> | 1549 |
| The Brenner Base Tunnel: An overview of the excavation types used in the project <i>D. Marini, G. Venditti, D. Unteregger, R. Insam & R. Marazzo</i> | 1561 |
| Key construction technologies for high-speed railway tunnels that with shallow buried depth and gentle slope in loess platform <i>W. Mi, Y. Wang, H. Zhang, X. Miao, J. Zhang & M. Zhang</i> | 1569 |
| Construction procedures of the tunnel for the extension works of Madrid Metro Line 3 from Villaverde Alto to El Casar <i>M. Núñez & J. Zurdo</i> | 1579 |
| Deformation failure characteristics and control measures of shallow loess tunnel of water-rich stratum: A case study <i>K. Tang & J. Qiu</i> | 1586 |
| Impacts of the February 2023 Kahramanmaraş, Turkey earthquakes on outlet works in rock formations <i>P. Uygur, Ö. Öztürk, E. Dumlu & F. Çalıřkan</i> | 1594 |
| Research and development support for the construction of the big circle line on the example of the line's intersection with the existing facilities of the Moscow metro <i>V.V. Viazovoi, R.A. Evtushenko, D.S. Konyukhov & D.S. Petunina</i> | 1602 |
| Evaluation of impacts on existing structures induced by deep excavations in Bangkok MWA project <i>P. Vonghirunyika, W. Kroehong, T. Yonjoho, K. Kandavorawong, A. Chayaroon, O. Duangsano & P. Jongpradist</i> | 1610 |
| <i>Mechanized tunnelling (TBM, shield)</i> | |
| Investigation of vibration patterns generated during rock cutting tests <i>U. Ates, H. Copur & A. Shaterpour-Mamaghani</i> | 1621 |
| Bio-polymer sodium alginate application as an eco-friendly additive in slurry TBM excavation <i>A. Bae, Y.J. Shin, Y. Choe, S. Kim & H. Choi</i> | 1630 |
| More efficient, cost-effective and reliable Slurry Treatment Plants (STPs) for mechanized tunnelling operations in the Asia-Pacific region <i>K. Bai & G. Vogt</i> | 1634 |
| An evaluation of using different excavation methods related to specific geologic conditions in the Istanbul area <i>C. Balci & N. Bilgin</i> | 1641 |

| | |
|--|------|
| Critical issues in selecting conventional and mechanized tunnelling methods, lessons learned from the past | 1648 |
| <i>N. Bilgin & C. Balci</i> | |
| Computational modeling of cutting disc-rock interaction in mixed ground conditions | 1654 |
| <i>S.N. Butt, J. Rostami & G. Meschke</i> | |
| Pumice mineral using as a backfill grout injection in TBM excavations | 1663 |
| <i>U.C. Çalışkan, S. Beyhan & H. Ergin</i> | |
| Performance analysis of TBM excavation parameters related to small-diameter horizontal and inclined tunnels | 1669 |
| <i>M. Cardu, C. Todaro, O. Farzay, A.D. Giovanni & S. Saltarin</i> | |
| Wear prediction of disc cutter tools during shield tunnelling in composite stratum based on improved deep learning method | 1675 |
| <i>J. Chang, D. Zhang & H. Huang</i> | |
| A modified foam half-life time test method for EPB shield tunnelling | 1682 |
| <i>Z. Chen, A. Bezuijen & Y. Fang</i> | |
| Automatic excavation system for directional control in shield tunneling using machine learning techniques | 1687 |
| <i>J. Chen, H. Kamada, N. Takamoto, H. Sugiyama, S. Yamamoto & T. Aoyama</i> | |
| Influence analysis and control measures of super-large diameter shield tunnel undercrossing the existing tunnel in upper-soft and lower-hard composite stratum | 1694 |
| <i>J. Chen, Z. Lv & H. Lou</i> | |
| Influence of TBM cutter configurations on gravel excavation characteristics revealed by discrete element method | 1698 |
| <i>Y.-F. Chen, T.-T. Wang & F.-S. Jeng</i> | |
| Research on the application of high-strength burn-free building blocks made from shield muck | 1705 |
| <i>H. Chen, Y. Xiao, B. chen, A. Lin & X. Liu</i> | |
| The key technology of large section pipe jacking for main structure of station in complex water-rich sand bed | 1711 |
| <i>B. Cheng, W. Huang, X. Shuai & Y. Tan</i> | |
| Box jacking construction technology for large cross-section box culverts passing under existing high-speed railways | 1719 |
| <i>C. Cheng, J. Wang & Y. Li</i> | |
| City Rail Link – bored tunnel challenges in Auckland city centre, New Zealand | 1728 |
| <i>T. Cheung, S.F. Chau, T. Ireland & S. Eratne</i> | |
| Research and application of multi-curve small turn continuous belt conveyor | 1737 |
| <i>L. Cui, H. Xu, J. Shen, J. Cheng, P. Song, Q. Qin & W. Yang</i> | |
| Slurry treatment technology based on calcium oxide and seawater of extra-large diameter slurry balance shield machine in Zhuhai area muddy silty clay stratum | 1742 |
| <i>R. Dong, Z. Zhou & W. Liao</i> | |
| Field monitoring and numerical modelling of ground heaves due to shield tunnelling in soft ground conditions | 1750 |
| <i>O. Duangsano, A. Chayaroon, P. Yensri, A. Asanprakit & N. Phienwej</i> | |

| | |
|--|------|
| Research and application of key technologies for the TBM tunnel construction under extremely complex geological conditions | 1759 |
| <i>H.H. Feng & K.R. Hong</i> | |
| Evaluations and considerations on the squeezing rock tunnelling in twin TBM tunnel of Rishikesh to Karanprayag railway project in Himalaya | 1768 |
| <i>M. Forooghi, V. Bansal, M. Tajik, S. Jain, S. Batuman & P. Aggarwal</i> | |
| Structural behaviour mechanism of vertical jacking method on large sections and influencing factors analysis | 1777 |
| <i>Y.-M. Gao, X. Liu, Z. Liu, G. Ramos & J. Turmo</i> | |
| Research on the automatic and synchronous construction technology of fully prefabricated internal structures inside large-diameter shield tunnels | 1784 |
| <i>Z. Ge, Z. Tang, C. Chen & X. Liu</i> | |
| The Sicilian job, 21 TBMs simultaneously at work to modernize the railway infrastructure of the largest island in the Mediterranean Sea | 1792 |
| <i>R. Grandori & R. Bono</i> | |
| Evaluating TBM design and performance, 30 years apart: The Lesotho Highlands Water Tunnel, phase 1 and phase 2 | 1800 |
| <i>B. Grothen</i> | |
| Load condition effect based on functional model for the ultimate bearing capacity of segmental lining | 1806 |
| <i>C. Guo, R. Dong, X. Dong, C. He & Y. Cai</i> | |
| Negligible ground surface movement with EPB TBMs in Singapore marine clay and fluvial sand | 1814 |
| <i>G.C. Hangadi, L.J. Pakianathan, C.K. Poh, J. Lim & R. Koh</i> | |
| Development and application of supersized tunnelling technology for China's large-scale construction of underground infrastructure | 1820 |
| <i>S. Hu, J. Hoss & W. Sun</i> | |
| Failure analysis and coping suggestions for TBM tools under complicated geological conditions | 1828 |
| <i>H. Huan Feng, S. Ying Wang, L. Wei Yang & Y. Dong Yang</i> | |
| Construction method for rapid construction of station by use of large-diameter shield tunneling machines expanding small-diameter shield tunnels and its application | 1837 |
| <i>L. Huang, K. Jia, J. Zhang, D. Yu & T. Song</i> | |
| Breaking the tunnel vision: Generalizing TBM performance prediction across projects | 1843 |
| <i>S. Huang, R. Sousa & G. Korfiatis</i> | |
| Study on soil discharge efficiency of earth pressure balance shield tunneling in deep buried depth sandy stratum | 1850 |
| <i>S. Huang, X. Zhong, Z. Zhou & T. Feng</i> | |
| Muck discharge efficiency depending on soil conditioning by laboratory-scale model test | 1860 |
| <i>B. Hwang, A. Bae, D. Lee, K. Lim & H. Choi</i> | |
| Use of biomass as soil conditioner to improve clay rheology in EPB tunneling | 1866 |
| <i>M. Ishaq, B. Appleby, J. Rostami, J. Samaniuk</i> | |
| TBM jamming and statistical estimators: Case of a long and deep tunnel | 1875 |
| <i>D. Kasal, A. Flor, F. Amadini & A. Oss</i> | |

| | |
|---|------|
| Construction of a Horseshoe-shaped trenchless tunnel using the rectangular element propulsion method | 1884 |
| <i>D. Koizumi, T. Shimotsu & T. Tanaka</i> | |
| Decision-Making approach for parallel earth pressure balance machine advancements for tunnel construction | 1893 |
| <i>N. Kumbhar & S. Tirpude</i> | |
| Short launch of TBM to overcome economic and logistic difficulties in Sri Lanka | 1902 |
| <i>D. Lees, J. Sánchez, Y. Chengzhi, S. Banda, D. Denman & P. Muniyandy</i> | |
| Adaptability design and application of TBM cutterhead in Beishan extremely hard rock geological conditions | 1909 |
| <i>J.F. Li</i> | |
| Real time estimation and early warning of rock mass strength and integrity in TBM tunneling | 1916 |
| <i>Q. Li, L. Du, Y. Yang, X. Zhao, Y. Zhao, Y. Quan & S. Su</i> | |
| Three-dimensional centrifuge modelling of the effects of TBM on adjacent piles | 1926 |
| <i>X. Liang & S. Haigh</i> | |
| Geotechnical dimensioning of TBMs and new technological challenges | 1935 |
| <i>G. Lunardi, G. Cassani, M.C. Gatti & A. Zimbaldi</i> | |
| Line 2 y Ramal - Red Básica Metro Lima y Callao – Conditioning of different types of soils encountered during the tunnel excavations with 2 TBMs (EPB and Variable Density) | 1944 |
| <i>J.L. Magro, M. Calleja, R. Bono & S. Iacullo</i> | |
| Large diameter slurry TBM tunnels with very low cover: A comparison of approaches | 1953 |
| <i>M. Mains, S. Sánchez, L. Içik & C. Mora</i> | |
| The mechanised excavation of the exploratory tunnel of the Brenner Base Tunnel: The major challenges | 1959 |
| <i>D. Marini, A. Lussu & G. Venditti</i> | |
| Excavation management system for mechanized tunnelling in urban areas | 1967 |
| <i>M. Marotta, J. Kumarasamy, A. Sim, C.K. Poh & K.B. Chang</i> | |
| Advancing mechanized tunneling through integrated digital design, simulation, and data-driven techniques | 1974 |
| <i>G. Meschke, Y. Zendaki, A. Alsahly & B.T. Cao</i> | |
| TBM design and special features for boring through highly squeezing ground | 1981 |
| <i>M. Monina, M. D'Ambrosio & F.D. Rossi</i> | |
| The application of tunnel boring machines in the execution of incline and decline tunnels in mining projects | 1987 |
| <i>M. Nasiri, H. Moammeri & G. Stripp</i> | |
| Soil conditioning for TBM performance advancement in mixed geology | 1994 |
| <i>E.D. Negro, A. Boscaro, E. Barbero, A. Menghini & C. Butterworth</i> | |
| Tunnel excavation with EPB: Development of new conditioning agents to reduce the amount of water required for soil conditioning | 2003 |
| <i>E.D. Negro, A. Boscaro, E. Barbero, C. Todaro & D. Peila</i> | |

| | |
|--|------|
| Managing tunnelling risks in urban environment using first earth pressure balance/variable density slurry Tunnel Boring Machine (TBM) in Hong Kong for the MTR East Rail Line Cross Harbour Extension of the Shatin Central Link project | 2012 |
| <i>N. Ng, D. Kwork, K. Kwork & D. Jacques</i> | |
| Is a large TBM diameter unfavourable under squeezing conditions? | 2020 |
| <i>A.N. Nordas, T. Leone & G. Anagnostou</i> | |
| Developments in large diameter subaqueous tunnels | 2028 |
| <i>O. Ozgur, T. Ma & J. Cheung</i> | |
| Design and construction excellence at Tuen Mun-Chek Lap Kok Link tunnels: An engineering marvel beyond boundaries | 2035 |
| <i>W.H. Patrick, E. Baranger, K. Choi, P. Thompson & A. Raine</i> | |
| TBM Sub-sea tunnelling in the Arabian Gulf | 2043 |
| <i>G. Peach, H. Vigil & K.S. Al-Khayareen</i> | |
| Green TBM: Design targets, features and power efficiency | 2049 |
| <i>A. Petriccioli, L. Tafuri & R. Grandori</i> | |
| On the interplay between face extrusion and shield loading in squeezing conditions | 2056 |
| <i>Th. Pferdekämper & G. Anagnostou</i> | |
| Research on curved tunneling and bending angle calculation of articulated shield tunneling machine | 2062 |
| <i>W. Qiao, X. Zhou & X. Liang</i> | |
| Analysis of motion characteristics of large-sized irregular particles in long pipelines | 2070 |
| <i>Z. Ren, S. Wang, Y. Wang & X. Zhou</i> | |
| Experimental study and simulation verification of slurry penetration process | 2076 |
| <i>Z. Ren, L. Ye, X. Zhou, Y. Wang & S. Wang</i> | |
| Passage of TBM EPB under buildings with deep foundations, with physical interference | 2082 |
| <i>H. Rocha, F. Hirata, G. Robbe, W. Giannotti & T. Pires</i> | |
| TBM performance in rock conditions of water diversion tunnel constructions (Mae Ngad-Mae Kuang tunnel) in Chiang Mai Province, Thailand | 2087 |
| <i>K. Sarapagdee, A. Laddakul & T. Saelao</i> | |
| A new AFTES guideline: Suitability and selection process of pressurized TBMs in urban contexts | 2099 |
| <i>M. Schivre & F. Renault</i> | |
| JWPCP effluent outfall tunnel in Los Angeles, California – Anticipated challenges and slurry TBM performance in the soft ground section of the alignment | 2108 |
| <i>M. Scialpi, M. Piemontese, R. Schürch, M. Kendall & N. Karlin</i> | |
| A review of deterministic approaches in the performance evaluation of Raise Boring Machines (RBMs) | 2116 |
| <i>A. Shaterpour-Mamaghani, H. Copur, C. Balci & D. Tumac</i> | |
| Distinctive considerations in the design and construction of large diameter TBM-built tunnels in urban environment – a UK perspective | 2122 |
| <i>S. Shen</i> | |

| | |
|---|------|
| Smarter, larger, leaner, greener – trends of the tunnelling industry towards a sustainable future in the United Kingdom | 2130 |
| <i>S. Shen & A. V. Serin</i> | |
| Tunneling successes in West Los Angeles - Purple Line Project Section 3 | 2139 |
| <i>E. Sillerico, M. Ellwood, C. Davis, A. del Amo & E. Whitman</i> | |
| Application of EPB-TBM dual-mode shield tunneling technology in Shenzhen Metro | 2148 |
| <i>T. Song, J. Yang, L. Huang, J. Lei, K. Jia, J. Huang & J. Lu</i> | |
| A newly developed reduced CO ₂ backfill grout system for TBM operations | 2157 |
| <i>M. A. Sposetti</i> | |
| Successful tunnelling in the desert, Wakrah and Wukair Drainage Tunnel, Doha, Qatar | 2162 |
| <i>J. B. Stypulkowski & K. S. F. S. Al-Khayareen</i> | |
| TBM design for operation in gassy formation | 2170 |
| <i>L. Tafuri, O. Bonfanti & A. Lisardi</i> | |
| Successful steering control with partial soil excavation for station crossing of a 13.08 m diameter EPB TBM in Lodz, Poland | 2179 |
| <i>M. Tomaszewski, S. Nortoft, F. Bove & M. D'Ambrosio</i> | |
| Planning, design and construction for mechanised cross passage excavation | 2185 |
| <i>C. K. Tsang, T. J. Sia, Z. G. Zhang, L. Sun & K. Chen</i> | |
| A study on intelligent assembly technology for Mid-partitions in shield tunnels and application | 2193 |
| <i>H. Wang</i> | |
| Creative design for Herrenknecht TBM used in Jiangyin Jingjiang Yangtze River crossing tunnel construction | 2202 |
| <i>H. Wang, R. Jin, G. Lin & W. Sun</i> | |
| Research on settlement control of large diameter shallow buried shield tunnel crossing railway and reservoir embankments | 2209 |
| <i>J. Wang, S. Yan, C. Wang, Q. Yang, J. Sun & S. Xue</i> | |
| Slaking characteristics of clay blocks and the influence of dispersant | 2215 |
| <i>S. Wang, H. Zhu & P. Liu</i> | |
| Revealing inherent mechanism affecting loess-metal interface adhesion properties: Insights from macro- and atomic-scale tests | 2222 |
| <i>B. Wu, W.-C. Cheng & X.-D. Bai</i> | |
| Challenges and solution of super large diameter TBM tunnel construction in urban center | 2229 |
| <i>X. Xiao, L. Jiao & Y. Li</i> | |
| Research on vertical dry tailings conveying technology and equipment of shaft boring machine | 2239 |
| <i>C. Yang</i> | |
| Study on classification prevention and control technology of hard rock rockburst in TBM construction | 2244 |
| <i>Y. Yang, L. Du, C. Gong, Y. Song, Q. Li & M. Wang</i> | |
| Prediction model of TBM tunneling speed based on geological parameters | 2253 |
| <i>Y. Yang, L. Du, R. Tang, F. Wei & H. Zhang</i> | |
| Research on prefabricated metro station structure and key assembly technologies | 2262 |
| <i>X. Yang & F. Lin</i> | |

| | |
|---|------|
| Numerical investigation of the excess pore water pressure generated by TBM tunnelling in saturated and unsaturated aquifers: A comparable study <i>C. Zhang & A. Bezuijen</i> | 2271 |
| Launching technology with shallow overburden for super-large diameter slurry shield <i>B. Zhang, H. Wang, X.B. Xie, Y. Y. Lu & Z. Chen</i> | 2280 |
| Experimental research on foam performance and intelligent injection control of foam additive system of tunnel boring machine <i>C. Zhang & Y. Zhai</i> | 2286 |
| Visualization study on stability of shield tunnel face with transparent soil model <i>H. Zhao, Z. Jia & Y. Liu</i> | 2294 |
| Application study of combined machining in the cutterhead design for hard rock tunnel boring machine <i>M.B. Zhou</i> | 2302 |
| Shield self-driving technology and its application <i>W. Zhou, M. Hu, H. Wu, B. Wu & J. Lu</i> | 2309 |
| Research on frontier technology of shield machine/hard rock machine selection and mode innovation <i>W. Zhu, J. Wang & W. Xie</i> | 2316 |
| Development and application of a synchronous shield tunnelling technology combining advancement and segment fabrication <i>Y. Zhu, Y. Zhu, X. Bi, X. Wang, Z. Zhang, J. Chen, Y. Qin & S. Duan</i> | 2323 |
| <i>Immersed tunnels</i> | |
| Achieving sustainable immersed tunnel projects <i>J. Baber</i> | 2333 |
| Research on fire resistance limit standard of steel-encased concrete immersed tunnel structure <i>P. Cao, S. Song, M. Wu, S. Jiang & E. Liu</i> | 2342 |
| Stability and deformation analysis of dry dock slope in Haihe Tunnel, Tianjin, China <i>C.N. He, Y. Qu, E.C. Qing & J.Q. Shen</i> | 2349 |
| Research on online intelligent prediction of service status of immersed tunnel based on artificial intelligence <i>H. Ding & P. Cao</i> | 2358 |
| Key developments of world's immersed tunnel design and construction solutions <i>A. Doorduyn, Y. Li, H. de Wit, M.T. Hart & W. Chen</i> | 2366 |
| Structural optimization design of seamless expansion joint based on finite element analysis <i>W. Jiang, S. Zhang, Y. Wang, R. Bao & J. Shan</i> | 2376 |
| Analysis and research on seismic effects of immersed tunnel joints of Shenzhen-Zhongshan Link <i>Z. Li, Z.J. Chen & H. Chen</i> | 2388 |
| Seismic resilience assessment for longitudinal response of immersed tunnels <i>X. Li & H. Yu</i> | 2394 |
| Void detection method and its application for steel shell-concrete interface of immersed tube tunnel <i>S. Li, Y. Zhang & S. Feng</i> | 2400 |

| | |
|--|------|
| Assessment of operational limits for tunnel element transport using a shallow draft semi-submersible barge | 2407 |
| <i>M. Lin, Z. Ying, W. Shen & X. Wang</i> | |
| Research and application of steel intelligent manufacturing of Shen-Zhong Link steel sandwich immersed tunnel | 2414 |
| <i>H. Long, W. Rui & Y. Xie</i> | |
| Research and application of transportation and landing technology for Shen-Zhong Link super large steel shells of immersed tunnel | 2421 |
| <i>H. Long, W. Rui & G. Zhang</i> | |
| Innovative research on key technologies for dredging construction of immersed tunnel | 2429 |
| <i>D. Ma, P. Zhang, Z. Li & Y. Yao</i> | |
| Immersed tunnels – knowledge sharing in the past showing the way towards sustainable solutions in the future | 2434 |
| <i>T. Olsen</i> | |
| Small-scale model test for the dynamic behavior of submerged floating tunnels considering the coastal connection with subsea bored tunnels | 2442 |
| <i>J. Park, S.-J. Kang, J.-B. An, J. Kim & G.-C. Cho</i> | |
| Mechanical behaviors of steel-concrete-steel immersed tunnel composite structures | 2450 |
| <i>S. Song, X. Nie, J. Fan, Y. Guo & H. Zhang</i> | |
| Key technologies of concreting construction of super-wide steel-concrete-steel sandwich immersed tunnel element tubes in Shenzhen–Zhongshan Link | 2457 |
| <i>Z.-X. Su, X.-D. Wu, C.-L. Zhang & S.-Y. Song</i> | |
| Experimental study on the typhoon resistance by placing Shenzhen-Zhongshan Link immersed tunnel element on the seabed | 2466 |
| <i>S.-P. Sun, Q.-A. Ou Yang, W.-H. Li & J.-J. Ma</i> | |
| Assessing the suitability of coarse sand for the sand flow method in immersed tunnel foundations | 2475 |
| <i>X. Szadkowski, M. van der Molen, R. Hermsen & R. Montijn</i> | |
| Ventilation and smoke exhaust technical scheme of super wide section immersed tunnel | 2483 |
| <i>X. Yang, L. Cheng & M. Zhong</i> | |
| Fire prevention and rescue technologies used in ultra-wide cross-section immersed tunnel | 2487 |
| <i>X. Yang, L. Yin, M. Zhong & L. Cheng</i> | |
| Quantitative detection method and practice of voids at the interface of steel-shell concrete with complex structure | 2492 |
| <i>H. Zhao, G. Liu, Z. Fan, L. Sun, L. Meng & L. Wang</i> | |
| Research on settlement calculation method for DCM composite foundation of immersed tunnel in Shenzhen-Zhongshan Link | 2500 |
| <i>J.-J. Zhou, F.-Y. Xia, Z.-J. Chen, X.-N. Gong, D. Liu & J.-L. Yu</i> | |
| <i>Waterproofing and drainage</i> | |
| Next generation tunnel waterproofing | 2509 |
| <i>Y. Boissonnas</i> | |
| Mitigation of the sources of infiltration in the segment sealing gasket | 2517 |
| <i>G. Bomben</i> | |

| | |
|---|------|
| Analysis of cement grout hydraulic erosion in a homogeneous fracture <i>H. Duan & L. Zou</i> | 2522 |
| Seepage and drainage study of underwater tunnel connecting section with combined method <i>H. Fu, K. Hu, Y. Wu, Y. Yu & W. Liu</i> | 2529 |
| Comparison of double shell and sprayed single shell waterproofing methods in tunneling <i>I.U. Gök, E. Karahan & B. Ünver</i> | 2539 |
| Constitutive model of aged EPDM rubber in subsea shield tunnel <i>C. Gong, C. Xie, Y. Ge & J. Song</i> | 2548 |
| Research and application of joint waterproofing technology for prefabricated metro station structures <i>M. Huang, Q. Fan, X. Yang & L. Fang</i> | 2554 |
| Innovative waterproofing system for shallow underground structures <i>D.S. Konyukhov, T.E. Kobidze & O.B. Krymov</i> | 2561 |
| Tunnel drainage system and the possibility of non-destructive remediation <i>J. Ortuta & V. Tóth</i> | 2567 |
| Step effects of hydraulic pressure of tunnels in loess under high-pressure seepage <i>J. Qiu, K. Tang, Z. Zhao, Y. Bai, N. Zhang, Y. Chen & S. Ding</i> | 2575 |
| ITAtch design guidance chapter for composite Sprayed Concrete Lined (SCL) tunnels waterproofed with sprayed membranes <i>J. Su</i> | 2584 |
| Self healing materials for preventing tunnel crystalline damage: Anti-calcium leaching, mechanical performance, self-healing mechanism <i>Y. Tong, F. Ye, C. Tian, Y. Jiang, J. Zhang, H. Wang, B. Wu & X. Han</i> | 2593 |
| Analysis of viscous fingering between water and cement-based grout in tunnels <i>S. Zhang, F. Johansson & L. Zou</i> | 2602 |
| Analysis of cement grout propagation with varying fracture apertures <i>L. Zou, G. Zirgulis, A.N. Ghafar, U. Håkansson & V. Cvetkovic</i> | 2610 |
| <i>Instrumentation and monitoring/testing and inspection</i> | |
| Design and development of tunnel liner void detection system <i>A. An, W. Luo, G. Tian, Y. Xu, L. Gao & J. Zheng</i> | 2619 |
| Tunnel condition assessment: State-of-the-art <i>S. Behbahani, J. Steinkuehler, J. Rostami, X. Wang & T. Iseley</i> | 2624 |
| Ground movement due to shaft construction and dewatering at Bengeworth road for the London Power Tunnels 2 scheme <i>O. Brown, A. Simic & J. Ellis</i> | 2630 |
| Application of Acoustic signal to quantify the damage of the lesser Himalayan sandstone under unconfined compression loading and its implementation in the micromechanical damage-plasticity model <i>S. Chajed & A. Singh</i> | 2639 |
| Tunnel detection and monitoring technology based on terrestrial laser scanning <i>Y.-J. Cheng, C. Wang & W.-G. Qiu</i> | 2644 |

| | |
|---|------|
| Bored tunnels: Automated extraction of segment edge location from scan data <i>J. Douglas, O. Côté & S. Jain</i> | 2650 |
| Cavity detection model from GPR images considering reinforcing bars in tunnel segment lining <i>C. Hwang, S. Yang, S. park, H. Kim & H. Choi</i> | 2658 |
| Combination of modelling and monitoring in assessing stability of a tunnel constructed in highly deformable rock and fragilized by fire <i>T. Kazerani & E. Garin</i> | 2664 |
| Field measurement of pile transient lateral response to advancing tunnel <i>C.M. Khoo, H. Mohamad, B.P. Tee & M.F. Ghazali</i> | 2672 |
| Model experiment on load-bearing performance and failure process of newly proposed invert to reduce volume of excavation <i>Y. Koizumi, A. Kusaka, N. Isago, K. Kawata, T. Otsu & N. Mikami</i> | 2681 |
| A noncontact mobil system using camera module for tunnel inspection <i>C. Lee, D. Kim & D. Kim</i> | 2689 |
| Tunnel indirect monitoring and damage identification method based on SET-Swin transformer <i>Q. Li, X. Xie & K. Zeng</i> | 2696 |
| Effectual approach to characterize rock fracture: Insight from calculating method of fractal dimension <i>B. Li, W. Zhang, Y. Xue, K. Li, J. Zhao, Y. Chen, R. Kong & G. Wang</i> | 2702 |
| Research on integrated monitoring platform of composite steel-concrete immersed tunnel <i>X. Mao, Z. Zhang & L. Li</i> | 2717 |
| Study for health monitoring of mountain tunnels operation using distributed fiber optic sensing technology <i>H. Nonaka, Y. Miyajima, N. Sakamoto, Y. Taira, T. Yamamoto, M. Imai, K. Koike, K. Kishida, H. Shinbo & J. Kawabata</i> | 2724 |
| Development of wear detection device using dye <i>Y. Omae, Y. Imaoka, H. Ueda, A. Nakamoto & R. Fukui</i> | 2731 |
| Structure health sensing network layout and monitoring based on wireless sensor network in undersea tunnel <i>L. Ouyang, H. Huang, D. Zhang, C. Wang & S. Zhu</i> | 2737 |
| Innovative shaft inspection system for the Gotthard Base Tunnel <i>M. Puglia, P. Spohn, K. Wachter, L. Chelini & S. Xiao</i> | 2745 |
| Fault diagnosis system for tunnel boring machines based on electrical energy monitoring <i>Y. Qin, C. Zhang, S. Huang, Z. Wu, H. Shen & J. Sun</i> | 2751 |
| Pivotal role of instrumentation & monitoring in construction of Mumbai Metro Line 3 in an urban setting <i>A. Rawat, R.R. Kumar & S.K. Gupta</i> | 2757 |
| Geotechnical instrumentation for road tunnels: Success cases in Colombia <i>V. Restrepo, H. Salazar & J. Piedrahita</i> | 2763 |

| | |
|--|------|
| Analysis of laboratory tests for the determination of the clogging risk in mechanized tunnel excavation in fine-grained soils | 2771 |
| <i>D. Sebastiani, S. Mangifesta, A. de Lillis & S. Miliziano</i> | |
| Information entropy based Robust Sensor Placement (RSP) method for wireless sensing of shield tunnel deformation | 2778 |
| <i>J. Shi, H. Huang & Z. Guan</i> | |
| Design and key features of shaft and tunnel excavation monitoring system implemented in Singapore's Deep Tunnel Sewerage System Phase 2 Project | 2784 |
| <i>A.K.K. Soe, L.L. Woo, K. Khin, P.C. Koh, A. Maxwell & E. Valdez Jr</i> | |
| Research on concrete strength detection method based on digital drilling and machine learning | 2792 |
| <i>R. Wu</i> | |
| Development and application of similar materials to cobble stratum for solid-fluid coupling model test | 2800 |
| <i>W. Zan, W. Zhang & Q. Yang</i> | |
| Study on the deformation and stress law of single shell lining in subsea rock tunnels | 2809 |
| <i>W. Zhang</i> | |
| Using the acoustic emission and infrared thermal imager to identify the precursor of rock violent failure | 2817 |
| <i>S. Zhu, D. Zhang, H. Huang, C. Wang & L. Ouyang</i> | |
| <i>Digital and information technology</i> | |
| BIM Modelling & reality capture in underground drill and blast caverns | 2825 |
| <i>P.R. Antón, I.J.F. Teixeira, A. Barbeta, B.B. Vieira & F. Abreu</i> | |
| The Sotra Link Project (Norway): An application of the BIM methodology in tunneling design and construction | 2834 |
| <i>G. Barbieri, E.D. Panics, G. Bella, D.D. Femina, A. Biagi & M. Giani</i> | |
| INFRA-BIM interoperability for Tunnel Renewal | 2841 |
| <i>M. Catapano, A. Poli, R. Roncoroni & A. Reis</i> | |
| Design and implementation of a mobile welding robot for TBM cutterhead: Enhancing efficiency, precision, and safety | 2848 |
| <i>P. Chen, J. Chen, J. Mao, J. Shu, M. Yang & S. Guo</i> | |
| Enhancing management and construction quality for a 5km long sandwich immersed tunnel through digital and intelligent methods | 2857 |
| <i>W. Chen & J. Liu</i> | |
| Digital strategies-driven optimization of infrastructure maintenance: The case study of the rehabilitation of a disused tunnel in northern Italy | 2863 |
| <i>F. Foria, E. Moschetti, M. Calicchio, V. Grigoras & B. Boyaci</i> | |
| Intelligent technologies and applications on TBM tunnel construction | 2868 |
| <i>W. Guo, K. Hong, P. Gao & F. Li</i> | |
| Research and application of the bim-based fine management in shield tunnelling construction of rail transit engineering | 2876 |
| <i>Y. Huang, Z. Zhang, K. Jia, H. Lai & Y. Li</i> | |

| | |
|---|------|
| Innovative design and practice of full life cycle of complex underground engineering equipment based on digital twin <i>F. Liu</i> | 2885 |
| Research on intelligent construction technology and grading method of railway shield tunnel <i>G. Lu, T. Wang, J. Liu & W. Wang</i> | 2893 |
| The interface between construction site and Tunnel Information Model: The case of the Brenner Base Tunnel <i>D. Marini & G. Venditti</i> | 2902 |
| Integrated design of precast concrete linings for mechanized tunnels <i>A. Menozzi, B. Tiberi, D. Maturi & R. Comini</i> | 2910 |
| Data-driven underground construction management: a case study of the Big Circle Metro Line in Moscow <i>M.D. Nadot, V.V. Vyazovoy, M.A. Lvovskaya & A.G. Polyankin</i> | 2917 |
| Research on construction collaborative control method based on drilling and blasting tunnel equipment <i>Q. Nianwen, Z. Miaojun, J. Weiliang</i> | 2920 |
| Trusted elements in the digital model of the tunnel <i>G. Paskaleva, P. Beronneau & T. Bednar</i> | 2927 |
| Why is it worth using BIM in tunnelling? <i>F. Robert & N. Dias</i> | 2935 |
| Digital automation in the structural modelling process for tunnel linings – A digital tool-based case study <i>A. Shivasami & G. Heath</i> | 2944 |
| Demonstration of parametric analyses in ground models by applying programming logics using a digital tool named ParaRanger <i>A. Shivasami, R. Nair & L. Dunbar</i> | 2951 |
| Streamline field management processes to improve labor productivity and reduce material loss <i>H. Umeyama, S. Kitagawa, T. Arai, T. Fukuda, S. Taniguchi, F. Ito & H. Nagamatsu</i> | 2959 |
| Research on integrated management platform of shield construction based on digital twin and application in subway engineering <i>X. Wang, J. Wang, Y. Zhang & S. Jiang</i> | 2965 |
| A study of digital quantitative evaluation system for the safety risk management in the construction activities of transportation hubs <i>R. Wen, D. Gao, W. Yang & W. Mou</i> | 2972 |
| Research on data management and analysis of BIM technology <i>Y. Zhaofeng</i> | 2980 |
| A study on 3D reconstruction of tunnel based on NeRf: A case study of Shanghai Metro Line 18 Tunnel <i>Z. Zheng, Y. Xue, Y. Guo, J. Liu & L. Zhao</i> | 2985 |

Machine learning

- Development of a hard rock TBM performance prediction model using RMR input parameters 2995
A. Dardashti, J. Rostami, R. Ajalloeian, J. Hassanpour & A. Salimi
- Performance analysis of supervised algorithms on encoded data for predicting tunnel strain classes 3005
A. Dewangan, D.R. Sahoo & J. Karlovsek
- Automatic classification and segmentation of tunnel cracks based on deep learning and visual explanations 3014
Y. Feng, X. Zhang, S. Feng, Y. Zhao & Y. Chen
- TBM machine parameters estimation: From design approach to on-field results. A concrete example based on Kalman Filter approach 3023
C. Iasiello & J. Rodríguez-Sánchez
- An intelligent decision support system for tunnel structural defects maintenance with combining knowledge graph and deep learning 3029
F. Jia, Y. Xue, Q. Zhang & L. Qu
- Prediction of disc cutter wear considering ground conditions and TBM operating parameters 3037
Y.S. Kang, S.J. Park, J.H. Hwang, J.P. Hong & T.Y. Ko
- Leakage prediction and post-grouting assessment in headrace tunnel of a hydropower project 3044
T.B. Katuwal, K.K. Panthi, C.B. Basnet & S. Adhikari
- A novel machine-learning model for estimating disc cutter life in TBMs considering individual cutter travel lengths 3053
D. Kim, Y. Shin, D. Kim, C. Lee, K. Kwon & H. Choi
- Segment segmentation of tunnel ring point clouds using 3D deep learning 3059
W. Lin, B. Sheil, X. Xie, K. Li & G. Niu
- Forecasting the driving speed of the TBM using machine learning algorithms 3067
M. Miller, Y. Fang, H. Luo, Y. Wang, G. Xu, B. Leng, S. Kharitonov, V. Akulich, Y. Ma & F. Zou
- Intelligent tunnel asset management of CERN underground facilities 3073
V.D. Murro, A. Ouyang, J.A. Osborne & Z. Li
- Research and practice of digital lean construction mode of tunnelling based on shield self-driving technology 3079
L. Pei, H. Wu, M. Hu, J. Lu, B. Wu & G. Li
- Study on machine learning method for supporting conventional tunnel engineering judgement 3086
K. Sakai, S. Miyanaga & M. Yamagami
- Assessment of TBM performance in different types of rocks using supervised learning techniques 3095
H. Samadi, J. Hassanpour, J. Rostami & A. Moghbeli
- Hyperspectral imaging features for concrete compressive strength assessment: Experimental study 3104
C. Wang, H. Huang, M. Zhou & S. Zhu
- An energy-efficient tunnel ventilation control algorithm combining dynamic neural network and fuzzy control 3113
H. Wang, Z. Li, Y. Zhang & J. Zhang

| | |
|--|------|
| Intelligent surrounding rock classification and mechanical parameters analysis method based on drilling parameters of tunnels | 3122 |
| <i>M. Wang, S. Zhao, W. Yi & X. Peng</i> | |
| Investigation on surrounding rock quality prediction based on incomplete multi-source dataset and tree-augmented naive Bayesian network | 3131 |
| <i>C. Wu, H. Huang, H. Tong, M. Zhou, L. Zhang & Y. Tong</i> | |
| Machine learning-informed soil conditioning for mechanized shield tunneling feature engineering, model selection, and uncertainty quantification | 3139 |
| <i>X. Yuan, S. Wang & T. Qu</i> | |
| <i>Underground caverns/underground space use</i> | |
| Planning and support estimation of underground powerhouse in the Himalayas | 3149 |
| <i>S. Adhikari, C.B. Basnet, K.K. Panthi & T.B. Katuwal</i> | |
| A conceptual framework for the creation of an integrated planning system for the strategy of implementing technologies for underground urban construction | 3157 |
| <i>V. Agafonov, D. Konyukhov & E. Kulikova</i> | |
| Deep powerhouse caverns design development and challenges – Snowy 2.0 experience | 3160 |
| <i>I. Ching, M. Diederichs, B. Chapman & G. Cardone</i> | |
| Minimising impacts on the local habitat in relocation and construction of a large cavern for track crossover at Acharya Atre Chowk Metro Station of the Colaba-Bandra-Seepez (Line 3) in Mumbai, India | 3169 |
| <i>S.K. Gupta, R. Mittal, M. Dange & R. Tilak</i> | |
| Innovation practice of indoor space of rail transit hub | 3174 |
| <i>L. Ji, Y. Li, K. Wei, Y. Deng & Y. Fu</i> | |
| Hexane section and its section combination honeycomb type underground structure system. Design and implementation of the program study | 3180 |
| <i>Q. Jiao, L. Guo & W. Chen</i> | |
| Harnessing the potential of underground space for climate-neutral cities: Energy geostructures in metro tunnels | 3187 |
| <i>A. Koliji, E. Garin, T. Kazerani, B. Schenk & J. Senn</i> | |
| Research on complete technologies for the construction and utilization of super large caverns in Hong Kong | 3194 |
| <i>Y. Li, Z. Hong, W. Li & F. Xu</i> | |
| Challenges in planning, design, and construction of the underground power plant station cavern Kūhtai 2 | 3202 |
| <i>A. Morocutti, P. Wetzlinger & R. Steiger</i> | |
| The use of underground space in greater Kuala Lumpur | 3207 |
| <i>T.-A. Ooi & C.-M. Khoo</i> | |
| SMART tunnel revisited – after 15 years in operation | 3215 |
| <i>T.-A. Ooi & C.-M. Khoo</i> | |
| Large diameter surge shaft in weak foliated rock mass; excavation and support with real-time investigation and pre-excavation support strategy in the lesser Himalayan Slate | 3223 |
| <i>B. Parajuli, E. Christakis, A. Marasini & X.-Y. Yang</i> | |

| | |
|---|------|
| Gangxia North Hub innovation highlights <i>X. Qie & L. Qi</i> | 3232 |
| Contract Korsvägen - part of the new Westlänken Commuter Rail Project in Gothenburg, Sweden. Challenges of drill & blast Tunnelling and cut & cover construction in heterogeneous ground conditions <i>K. Rieker</i> | 3236 |
| The cross river rail project as a PPP model in Brisbane, Australia. Experiences in cavern construction for 3 underground stations and tunnelling with double shield machines <i>K. Rieker</i> | 3243 |
| Mechanized shaft sinking with VSM: Developing underground space for U-Park® systems <i>P. Schmäh, S. Frey & M. Peters</i> | 3249 |
| Snowy 2.0 – Implementation of a “twin numerical model” as computational tool of the “observational method” during the excavation of a large cavern under high in situ stress <i>P.L. Tonioni, A. Toussaint, P. Lignier, K. Thermann, A. Lambrughi & I. Ching</i> | 3255 |
| Rock engineering in Sweden - Mining, hydropower and railways <i>P. Vedin, T. Dalmalm & J. Brantmark</i> | 3262 |
| Integration of stations and cities plan and research on technological innovation of Shenzhen Dayun comprehensive transportation Hub <i>M.-S. Wang, C. Liu, R.-Z. Fei, W.-R. Liu, Y.-Y. Fu & Y.-Z. Deng</i> | 3267 |
| Comprehensive development and utilization of underground space of Xiangya Road River-crossing Tunnel project in Changsha City <i>H. Wang, J. Ma, X. Zhang & M. Zhou</i> | 3276 |
| A broad review of cavern engineering approach in meta-sedimentary rock in Northern Hong Kong <i>J.C.F. Wong, L.W.H. Tsang, H.H.M. Suen, D.C.W. Mak, F.K.L. To & H.H.C. Poon</i> | 3282 |
| Key technology for the construction of the Shen-Zhong Link tunnel under the existing operating expressway <i>X. Zhou, X. Cheng & Q. Xu</i> | 3290 |
| <i>Operational safety, maintenance and repair</i> | |
| The 365 km tunnels assessment along ASPI Motorways Network – Key findings addressing risk analysis procedures and structural conditions evaluation and strategy of interventions <i>C. Alessio, L. Baccolini, D.D. Fiore, M. Conte, M. Mazzola & D. Peila</i> | 3303 |
| Conservative rehabilitation interventions of masonry highway tunnels along the historic Genoa-Po valley motorway in Genoa (Italy) <i>C. Alessio, R. Pittalis, A. Poli, G. Attianese, B. Chiaia, D. Ferretti, E. Zanazzi, L. Ferrari & E. Coisson</i> | 3312 |
| Colle Marino left tunnel renewal project: The first case-history of full lining reconstruction - from invert to crown - under difficult geotechnical conditions and future developments for working under traffic <i>C. Alessio, B. Spigarelli, M. Mazzola, C. Ceccarelli, A. Poli & P. Iuculano</i> | 3320 |
| Lessons learned from longitudinal ventilation worldwide and CFD-based solutions <i>A.B. Amado, Y. Zhao & E.Q. Ruiz</i> | 3328 |

| | |
|---|------|
| Italian guidelines for the risk classification, safety evaluation and monitoring of existing tunnels: An overview | 3333 |
| <i>A. Carigi, C. Todaro & G. Silvestri</i> | |
| A computer-vision-based model updating strategy for shield tunnels with cracks | 3342 |
| <i>X. Chang, Y. Zhang & Y. Fu</i> | |
| Evolution of safety situation and repair scheme for punctured shield lining | 3350 |
| <i>Z. Dai, R. Hu & Z. Wang</i> | |
| Smart tunnel in industry 5.0: Improving road tunnel resilience by dynamic risk analysis | 3359 |
| <i>A. Focaracci, L. Martirano & F. Zacchei</i> | |
| Tunnel asset management: Risk analysis through the MIRET approach | 3365 |
| <i>F. Foria, G. Miceli & M. Calicchio</i> | |
| Tunnel renewal strategy – The evaluation of the advantages through LCA | 3371 |
| <i>S. Frisiani, M. Pierani, F. Magnelli, L. Baccolini & A. Poli</i> | |
| Development of cementitious repair material for tunnel concrete structures of operating railroad in salt-affected environment | 3379 |
| <i>Y. Kose, K. Miyake, A. Hosoda, M. Saito & H. Utsugi</i> | |
| Ventilation for a long underground road tunnel system from a modern perspective | 3388 |
| <i>T.K. Lam & E. Hataysal</i> | |
| Study on fire smoke exhaust strategy in daliangshan no.1 super-long expressway tunnel | 3394 |
| <i>F. Lan, H. Zou, L. Wu, Y. Wang & Y. Deng</i> | |
| Positioning and autonomous control of intelligent hydrodemolition robot | 3401 |
| <i>W. Liang</i> | |
| Research on information perception mechanism and evaluation method of tunnel lighting environment | 3409 |
| <i>B. Liang, J. Niu & C. Qin</i> | |
| Research and realization of equivalent lighting environment for tunnels | 3418 |
| <i>B. Liang, C. Qin & J. Niu</i> | |
| A numerical investigation on the long-term stability of tunnels excavated in the upper stratum of expansive layer | 3428 |
| <i>S. Ma, Y. Cui</i> | |
| Subway ventilation system design and the importance of predicting the long-term wall surface temperature | 3437 |
| <i>I.K. Mbaye</i> | |
| Approach in structural fire resistance of the existing North-South Railway Tunnel in Brussels | 3444 |
| <i>B.D. Pauw, C. Timperman & S. Devriese</i> | |
| A seismic damage classification for post-damage assessment of rock tunnels | 3451 |
| <i>D.A. Reddy & A. Singh</i> | |
| The numerical-physical coupling method in investigation of the response of the tunnel structure under fire scenarios | 3456 |
| <i>L. Wang & Z. Yan</i> | |

| | |
|--|------|
| Research on fire compartmentation of hyperscale public area in underground rail transit hub <i>K. Wei, L. Ji, Y. Fu & Y. Deng</i> | 3465 |
| Experimental study on the applicability of the combined tunnel ventilation system of complementary ventilation and shaft <i>Y. Xin & Y. Wang</i> | 3472 |
| Study on the influence of longitudinal slope on the temperature field inside railway tunnels in cold regions and engineering counter measures <i>C. Yang, S. Tian & Z. Ma</i> | 3480 |
| The impact of landscape belt design inside extra-long highway tunnel on driving comfort: A driving simulation study <i>F. Ye, J. Liu, W. Zhu, E. Su, X. Wen, X. Han, Z. Jiao & P. Sun</i> | 3489 |
| Full life cycle multi-hazard scenarios and structural response analysis of metro shield tunnels <i>T. Yu, Z. Yan & H. Zhu</i> | 3497 |
| Research on China's extra-long separate construction tunnel emergency evacuation and rescue technology <i>Y. Yuan & S. Chen</i> | 3504 |
| Concept of a thermoelectric power system in high geothermal tunnel: Preliminary design with numerical simulation <i>Y. Yuan, P. Cui & Q. Wang</i> | 3511 |
| Development and application of complete equipment for mechanized construction of defect remediation in existing railway tunnels <i>W. Yuan, F. Gui, L. Zhang & P. Zhang</i> | 3520 |
| Research trend and prospect of reconstruction and expansion technology of existing highway tunnels <i>Z. Zhang</i> | 3528 |
| Reliability study of full jet longitudinal smoke exhaust system for a road tunnel over 5 km long <i>X. Zhang, L. Tao, M. Luo & Y. Zeng</i> | 3538 |
| Resilience assessment of shallow-buried subway stations under earthquake disasters <i>C. Zhang, D. Zhang & Z. Huang</i> | 3545 |
| <i>Contractual practices and risk management</i> | |
| Development of a tunnel asset management tool from a risk-based approach <i>C. Alessio, D. Di Fiore, L. Baccolini, B. Chiaia & M. Conte</i> | 3557 |
| SMART-Systemic approach to risk management of tunnels <i>E. Andrés Marulanda</i> | 3567 |
| Risk management of tunnel projects: From qualitative to quantitative probabilistic risk analysis <i>A. Antiga, M. Chiorboli & M. Dotti</i> | 3572 |
| Strong financial and improved procurement strategies for the success of the Grand Paris Express <i>A. de Pommerol</i> | 3581 |
| A methodology of risk management to urban tunnels and its application to Bogota subway <i>J. Esteban Alarcón G & A.P. de Assis</i> | 3585 |
| The use of a reference cost system for contracting underground public works <i>E.A.P. Filho, C.K. Miyazato & P.M. Neto</i> | 3594 |

| | |
|--|------|
| Development of an early contractor involvement selection tool for public owners <i>C.P. Friedinger & P. Sander</i> | 3600 |
| Pawtucket CSO tunnel design build - From managing risk and quality to design and construction innovations <i>I. Halim, S. Polycarpe & V.E. Gall</i> | 3608 |
| Comprehensive risk management for slurry shield TBM tunneling using fuzzy set theory <i>K. Kwon, M. Kang, H. Park, Y. Ma & H. Choi</i> | 3617 |
| Geotechnical risks management associated with a tunnel launch in complex geological conditions <i>C.L. Ng, C.M. Khoo & N.A. Abdul Rahman</i> | 3623 |
| Comparing underground construction risk for urban transportation and hydropower projects – A lender’s technical advisor’s perspective <i>A. Noble</i> | 3632 |
| Underground risk and ESG aspects in pumped hydro and hydropower projects – what worries the lenders? <i>A. Noble</i> | 3639 |
| Research on risk management and control of undersea tunnel construction based on blockchain technology <i>L. Qu, S. Liu, M. Tan & H. Huang</i> | 3647 |
| Study on the major risk control elements under EPC management mode of rail transit <i>Z. Shi, J. Huang & L. Ding</i> | 3652 |
| Tunnel Euralpin Lyon Turin: The design and contract challenges for a modern Alpine base tunnel <i>D. Stocker, P. Gilli & M. Falanesca</i> | 3659 |
| Risk limiting in urban tunnel contracts <i>H. Wagner</i> | 3668 |
| Author index | 3673 |



Taylor & Francis

Taylor & Francis Group
<http://taylorandfrancis.com>

Preface

The World Tunnel Congress 2024 and the 50th ITA-AITES General Assembly are held in Shenzhen, China, from 19–25 April, 2024. The China Civil Engineering Society (CCES) is honoured to host this prestigious and significant event which is not only a milestone in the history of the ITA, marking its 50th anniversary but also a testament to the enduring commitment and collaboration within the international tunnelling community.

With the visionary theme of “Tunnelling for a Better Life,” WTC2024 is set to spotlight the pivotal role of tunnelling and underground works in creating sustainable, efficient, and resilient environments. This theme is a call to the global community to leverage the latest in innovation and technology, addressing the era’s most pressing challenges, including climate change, urbanization, and the quest for low-carbon, intelligent infrastructure solutions.

The proceedings encompass a wide array of critical topics in tunnelling and underground space, reflecting the latest trends, insights, and innovations. WTC2024 has received more than 1,000 abstracts and 540 full papers from authors of 46 different countries. After the peer review by the Scientific Committee which was composed of 145 experts from 39 countries, 486 papers from 40 countries were accepted for publication in the WTC2024 Proceedings. From integrating low-carbon technologies to applying intelligent systems in the design, construction, and management of tunnelling and underground works, the contributions within these pages showcase a forward-looking approach to tackling the complexities of modern urban development. The sustainable solutions presented within the proceedings illuminate a path toward resilient, low-carbon, and eco-friendly practices, reflecting our commitment to minimizing environmental impact and underscoring our dedication to efficiency and progress in the intelligent and digital era. The WTC2024 proceedings will inspire and guide our community toward realizing the potential of underground spaces to create a better, more sustainable life for present and future generations.

As we gather in Shenzhen, a city renowned for its dynamic innovation and rapid growth, we are reminded of the power of collaboration and the importance of knowledge exchange in advancing our field. The WTC2024 serves as a platform for experts, practitioners, and stakeholders from across the globe to come together, share insights, and forge partnerships that will drive the future of tunnelling and underground space development.

On behalf of the organizing committee and the CCES, we express our deepest gratitude to all participants, contributors, and sponsors who have made this event possible. As we celebrate the 50th ITA-AITES anniversary, WTC2024 in Shenzhen will provide invaluable opportunities for the international tunnelling community to explore the depths beneath our cities and the heights of our aspirations for a sustainable future and a better life.

Yi Jun
Chair of the WTC2024 Organizing Committee
President of the China Civil Engineering Society (CCES)
Shenzhen, April 2024



Taylor & Francis

Taylor & Francis Group
<http://taylorandfrancis.com>

Acknowledgements

Reviewers

The Editors wish to extend their gratitude to all the members of the Scientific Committee for their unwavering dedication and invaluable contributions.

Sponsors

The Organizing Committee and the Editors wish to extend their gratitude to the congress sponsors for their help and support.



Taylor & Francis

Taylor & Francis Group
<http://taylorandfrancis.com>

WTC 2024 Organization

Organizing Committee

| | | |
|-----------------|----------|--------|
| Yi Jun | Chair | China |
| Shang Chunming | Co-chair | China |
| Tang Zhong | Co-chair | China |
| Yan Jinxiu | Co-chair | China |
| Olivier Vion | Member | France |
| Li Jiqin | Member | China |
| Guo Shanyun | Member | China |
| Zhu Hehua | Member | China |
| Chen Xiangsheng | Member | China |
| Gao Wei | Member | China |
| Peng Limin | Member | China |
| He Chuan | Member | China |
| Lei Shengxiang | Member | China |
| Zhu Weibin | Member | China |
| Feng Shouzhong | Member | China |
| Hong Kairong | Member | China |
| Pei Liefeng | Member | China |
| Huang Hongwei | Member | China |
| Tan Zhongsheng | Member | China |
| Wang Bin | Member | China |
| Qiu Wenge | Member | China |
| Fu Helin | Member | China |

ITA-AITES Executive Council (2022-2025)

| | | |
|------------------------|----------------------------|-----------|
| Arnold Dix | President | Australia |
| Jinxiu (Jenny) Yan | Past President | China |
| Andres Marulanda | First Vice-President | Colombia |
| Hangseok Choi | Vice-President | Korea |
| Jamal Rostami | Vice-President | USA |
| Ioannis Fikiris | Vice-President (2023-2026) | Greece |
| Sindre Log | Member | Norway |
| Damian McGirr | Member | UK |
| Monika Mitew-Czajewska | Member | Poland |
| Andrea Pigorini | Member | Italy |

| | | |
|----------------|--------------------|-------------|
| Klaus Rieker | Member | Germany |
| Sanja Zlatanic | Member | USA |
| Gérard Seingre | Member | Switzerland |
| Thomas Dalmalm | Member | Sweden |
| Rick Lovat | Member (2023-2026) | Canada |

International Advisory Committee

| | |
|-----------------------|---------------------|
| Jairo Pascoal Júnior | Brazil |
| Rick Lovat | Canada |
| Søren Degn Eskesen | Denmark |
| Michel Deffayet | France |
| Lars Babendererde | Germany |
| Ioannis Fikiris | Greece |
| Rakesh Kumar Khali | India |
| Giuseppe Lunardi | Italy |
| Nobuharu Isago | Japan |
| In-Mo Lee | Korea |
| Ooi Teik Aun | Malaysia |
| Zaw Zaw Aye | Myanmar |
| Abidemi Agwor | Nigeria |
| Tom Melbye | Norway/ Switzerland |
| Jeyatharan Kumarasamy | Singapore |
| Thomas Dalmalm | Sweden |
| Felix Amberg | Switzerland |
| Aphichat Sramoon | Thailand |
| Nick Chittenden | UAE |
| Ross Dimmock | UK |
| Martin Knights | UK |
| John Reilly | USA |
| Shani Wallis | USA |

Scientific Committee

| | | |
|--------------------|--------------------|------------|
| Jinxiu (Jenny) Yan | China | (Chair) |
| Tarcisio Celestino | Brazil | (Co-Chair) |
| Markus Thewes | Germany | (Co-Chair) |
| Erik Eberhardt | Canada | (Co-Chair) |
| Han Admiraal | The Netherlands | |
| Jasmin Amberg | Switzerland | |
| Pengtao An | China | |
| Lars Babendererde | Germany | |
| Jonathan Baber | Australia | |
| Karin Bäßler | Germany | |
| Mikhail Belenkiy | Russian Federation | |
| Adam Bezuijen | The Netherlands | |
| Nuh Bilgin | Turkey | |

| | |
|--------------------------|------------------|
| Nikolai Bobylev | Russia |
| Nichole Boulton | Canada |
| Rune Brandt | Switzerland |
| Wout Broere | The Netherlands |
| Andrea Bruschi | Italy |
| Werner Burger | Germany |
| Christian Butron | Sweden |
| Clayton Chan | Hong Kong, China |
| Shougen Chen | China |
| Jason Chin | Hong Kong, China |
| Elena Chiriotti | France |
| Nick Chittenden | UAE |
| Jens Classen | Germany |
| Massimo Coli | Italy |
| Antonia Cornaro | Austria |
| Jesper Peter Dahl | Denmark |
| Thomas Dalmalm | Sweden |
| Bart De Pauw | Belgium |
| Michel Deffayet | France |
| Nicola Della Valle | Italy |
| Laurence Delplace | Belgium |
| Jeanne Doreau-Malioche | France |
| Heinz Ehrbar | Switzerland |
| Amanda Elioff | USA |
| Conrad W. Felice | USA |
| Vojtech Gall | USA |
| Robert Galler | Austria |
| Etienne Garin | Switzerland |
| Giuseppe M. Gaspari | Canada |
| Anne-Merete Gilje | Norway |
| Alexandre Gomes | Australia |
| Piergiorgio Grasso | Italy |
| Eivind Grøv | Norway |
| Caixia Guo | China |
| S.K. Gupta | India |
| Michael Halwachs | Germany |
| Choi Hangseok | South Korea |
| Marcel't Hart | The Netherlands |
| Siamak Hashemi | Iran |
| Jafar Hassanpour | Iran |
| Ole Hededal | Denmark |
| Karl Gunnar Holter | Norway |
| Hongwei Huang | China |
| Roy HUNG Kin-chung | Hong Kong, China |
| Lars Christian Ingerslev | USA |
| Nobuharu Isago | Japan |
| Kumarasamy Jeyatharan | Singapore |
| Chaojun Jia | China |

| | |
|-------------------------|------------------------|
| Su Jiang | UK |
| Yusheng Jiang | China |
| Berkan Kayadan | Denmark |
| Rakesh Khali | India |
| Chee-Min KHOO | Malaysia |
| Rakesh Kumar | India |
| Gyanendra Lal Shrestha | Nepal |
| Eric Leca | France |
| Siew Wei Lee | Hong Kong, China |
| Anna Lewandowska | Poland |
| Charlie C. Li | Norway |
| Liping Li | China |
| Jian Liu | China |
| Sindre Log | Norway |
| Rick Lovat | Canada |
| Zhao Lu | China |
| Giuseppe Lunardi | Italy |
| Jason Mann | Canada |
| Daniele Martinelli | Italy |
| Camilo Marulanda | Colombia |
| Andrés Marulanda E. | Colombia |
| Cátia Matos | Sweden |
| Alessandro Menozzi | Italy |
| Mehmed Mesihović | Bosnia and Herzegovina |
| Monika Mitew-Czajewska | Poland |
| Michael Mooney | USA |
| Tone Nakstad | Norway |
| Verya Nasri | USA |
| Matthias Neuenschwander | Switzerland |
| William News | New Zealand |
| Pekka Nieminen | Finland |
| Bjørn Nilsen | Norway |
| David J. Och | Australia |
| Henki Ødegaard | Norway |
| David Oliveira | Australia |
| Yoshikazu Ota | Japan |
| Casper Paludan-Müller | Denmark |
| Krishna Kanta Panthi | Norway |
| Jairo Pascoal Júnior | Brazil |
| Noppodol Phienwej | Thailand |
| Giorgio Piaggio | Chile |
| Sandeep Potnis | India |
| Eric Premat | France |
| Sanjay Rana | India |
| Florent Robert | France |
| Hugo Cássio Rocha | Brazil |
| Jan K.G. Rohde | Norway |
| Jamal Rostami | USA |

| | |
|-------------------------|------------------|
| Petr Salak | Czech Republic |
| Pekka Särkkä | Finland |
| Magali Schivre | France |
| Thomas Schoenborn | Norway |
| Roberto Schuerch | Switzerland |
| Gérard Seingre | Switzerland |
| D.K. Sharma | India |
| Andrew Shaw | UK |
| Daljit Singh | India |
| Thor Skjeggedal | Norway |
| Panos Spyridis | Germany |
| Raymond Leslie Sterling | USA |
| Robert Sturk | Sweden |
| Pavel Szereda | Denmark |
| Gary Tang | New Zealand |
| Per Tengborg | Sweden |
| Alun Thomas | Denmark |
| Carmine Todaro | Italy |
| Zvonko Tomanovic | Montenegro |
| Michael Tonnesen | Denmark |
| Jorn Tredal | Denmark |
| Ilkka Vähäaho | Finland |
| Gonzalo Diniz Vieira | Portugal |
| Harald Wagner | Thailand/Austria |
| Shuying Wang | China |
| Dazhi Wen | Singapore |
| Sallo Van der Woude | The Netherlands |
| Xiaochun Xiao | China |
| Shuan Xiao | Switzerland |
| Shulin Xu | Italy |
| Saffet Yagiz | Kazakhstan |
| Jinjun Yang | China |
| Shenyan Yao | Australia |
| Haitao Yu | China |
| Dongmei Zhang | China |
| Fengshou Zhang | China |



Taylor & Francis

Taylor & Francis Group
<http://taylorandfrancis.com>

Marble sludge in two-component grout applications

Carmine Todaro*, Andrea Carigi, Marilena Cardu & Daniele Peila
Politecnico di Torino, Turin, Italy

ABSTRACT: The two-component grout is currently the most used backfilling technology in shield tunneling applications. The technology is widely used all around the world thanks to its versatility. In fact, by properly calibrating dosages and types of raw ingredients, the technical specifications proper of a certain construction site can be easily satisfied. In this work, an innovative two-component grout mix design is introduced, in which a marble sludge is added to component A of the two-component grout system as a new ingredient. The marble sludge, obtained during the cutting process of ornamental stones in marble quarries is commonly considered a waste, an environmental problem that must be correctly managed. The idea of the authors was, hence, to use the marble sludge as an ingredient in the two-component grout, by physically blocking it in the gelling reaction and making it permanently part of the backfilling material, confined between the bored medium and the lining extrados.

In this paper, a laboratory test campaign on the potential use of marble sludge in the two-component grout technology is reported. A standard two-component grout and the innovative one have been compared according to standardized testing protocols. Outcomes highlight that the innovative grout has similar properties compared to the standard one and that the addition of marble sludge does not worsen the grout's properties.

Keywords: two-component grout, backfilling, marble sludge, waste reduction

1 INTRODUCTION

At present times, the two-component grout is the most used backfilling technology in mechanised tunnelling, using shielded machines.

During the tunnel excavation and the machine advancement, a gap is continuously created from the difference in diameter between the head of the machine and the lining extrados. This gap is inevitable since this geometrical peculiarity is essential and allows for the assemblage of the segments in linings under the protection of the shield, as well as avoiding potential machine block due to convergence of the excavated medium.

This gap, commonly called annulus, has an order of magnitude of centimetres and is schematically shown in Figure 1.

Different technologies can be used for the complete filling of the annulus (Grasso et al., 2023) but two-component grout is undoubtedly the most popular all around the world, due to its aptitude for preventing and controlling surface settlements (Fagnoli et al., 2013). This feature is guaranteed by an almost instantaneous gelation of the grout: the material after the

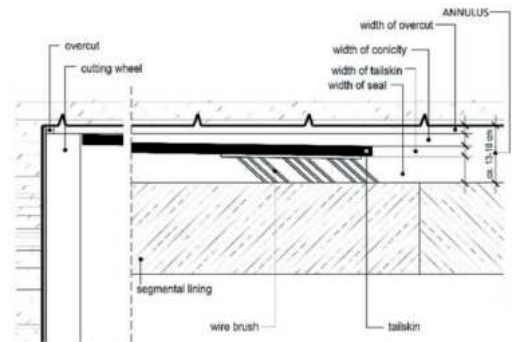


Figure 1. Annulus. Modified from thewes and budach (2009).

gelation starts immediately to improve its mechanical and elastic properties (Oggeri et al., 2021; Todaro and Pace, 2022).

The technology is based on two liquid components: the component A and the component B. The first is a cement-based material made up of cement, water,

*Corresponding author: carmine.todaro@polito.it

bentonite and retarding/fluidifying agent, while the second is commonly a solution of sodium silicate. Recently, new ingredients have been experimentally introduced to component A production such as, for example, fly ash, blast furnace slag, and industrial solid waste (André et al., 2022; Schulte-Schrepping and Breitenbücher, 2019; Song et al., 2020, Song et al., 2022).

These last studies were the starting point for this research, meaning that the idea to re-use something considered industrial waste was followed. In detail, the new ingredient selected to produce the component A has been the marble sludge, typical waste coming from the cutting process of ornamental stones. The choice was dictated by the nature of the marble sludge, composed mainly of calcium carbonate (CaCO_3) and directly available with a grain size distribution suitable for the proposed application. This material is produced in large amounts in marble quarries (Cobo-Ceacero et al., 2019): On average, for each cubic metre of marble exploited, 50-95 L of marble sludge is obtained. This material must be correctly managed, and the cost for its disposal significantly impacts the marble quarry business.

In this work, a preliminary test campaign is presented concerning the use of marble sludge powder as a raw ingredient for the production of component A. In the following paragraphs, the term “marble sludge” refers more specifically to the powder of marble, naturally produced during the cutting operation performed in a dry way (no water or other lubricants added).

Starting from a mix design typically used in construction sites for the two-component grout production, two different dosages of marble sludge have been tested to produce the grout. To verify the feasibility of using this new ingredient in the two-component grout technology, the component A properties, the reaction of gelation, and the hardened grout have been tested according to a standardised testing protocol (Todaro et al., 2019). The results of the grout prepared with the marble sludge have been compared to those of the reference mix.

2 THE ISSUE OF THE MARBLE SLUDGE

Considering the ornamental stone processing chain, the cutting operations are important since blocks of huge dimensions (m^3 of order of magnitude) are split into easily transportable slabs, suitable for further processing (Figure 2, left). Taking into account the Italian scenario, marble quarries are by far the most common, yet other types of ornamental stone quarries are also present on the national territory. For the reason of “abundance”, authors have selected marble sludge as an experimental ingredient in this study (Figure 2, right).



Figure 2. Chain cutting machine used for splitting the marble blocks in slabs (on the left) and the marble sludge obtained during this cutting operation (on the right).

Considering only the Carrara marble basin, hundreds of thousands of tons of marble sludge are produced every year due to the huge production of blocks (about 900,000 tons/year) of one of the finest marbles in the world. This big production inevitably leads to big amounts of produced marble sludge. Additionally, the environmental problem associated with marble sludge disposal is challenging, especially in the area where quarries operate.

From this scenario, the authors’ idea has been conceived, while considering the new big tunnel projects that are going to start in the next years in Italy according to the National Recovery and Resilience Plan funding: use the marble sludge in the backfilling phase in shielded mechanised tunnelling.

If, from one side, the environmental positive impact of “trapping” the marble sludge in a grout is practical, the calibration of the two-component grout mix design for using the marble sludge as an ingredient is a complex phase from the other side, considering the sensitive balance between compounds. The two mix designs presented have been calibrated not only to maximize the dosage of marble sludge but also to try to improve the mechanical performances of the obtained grout.

3 MATERIALS AND METHODS

The test campaign has been organised in two different parts: the first aimed to assess the properties of component A only and the gel time, while the second aimed to test the mechanical performance of the gelled grout at a short curing time. The short curing time is intended for no more than 3 hours after the casting. The procedure for preparing component A, for the sample casting and the used mix designs are reported in the following.

3.1 Used materials

To produce the two-component grout, Portland Cement type CEM I 52.5 R (CEN, 2011) was used. The accelerator, retarding/fluidifying agents, and

bentonite were provided by Mapei company. The marble sludge was instead provided by the “Rock cutting laboratory”, part of the “Geomechanics and Geotechnology laboratory” of the Politecnico di Torino.

3.2 Component a production and sample casting

The component A production was carried out by using a laboratory stirrer, according to the procedure described in Todaro et al. (2019) and hereinafter shortly summarised in Table 1.

Table 1. Mixing procedure.

| Phases | Impeller rotation speed (rpm) | Duration (min) |
|--|-------------------------------|--|
| Start – only water | 800 | / |
| Bentonite mixing phase | 2000 | 7 |
| Marble sludge mixing phase | 2000 | if the marble sludge is added, the mixing time should be calibrated for obtaining a suitable mix |
| Cement mixing phase | 2000 | 3 |
| Mix of retarder/ fluidifying agent – End | 2000 | 2 |

The mix designs used are reported in Table 2. Those where the marble sludge is used are “1M” and “2M”, while “R” is the reference mix design. Dosages are expressed in kg/m^3 .

Table 2. Mix designs.

| Ingredient | 1M | 2M | R |
|-----------------------------|-----|-----|-----|
| Cement | 230 | 230 | 230 |
| Bentonite | 30 | 30 | 30 |
| Marble sludge | 50 | 100 | / |
| Water | 834 | 816 | 853 |
| Retarding/fluidifying agent | 3.5 | 3.5 | 3.5 |
| Accelerator | 81 | 81 | 81 |

When component A was obtained, the sample casting was performed manually. The metered amount of components A and B were prepared in two different tanks, followed by quickly pouring component A inside the tank holding the component B, and later pouring all the grout into the empty tank, which led to the final step of emptying the grout (still liquid) into the sample moulds.

Used samples have dimensions in compliance with CEN (2016) (40*40*160 mm).

3.3 Performed test

The characterisation of component A, the reaction between components A and B, and the hardened grout at short curing time have been studied in accordance with the well-established, detailed procedure reported in Todaro et al. (2019). Briefly, the characterisation of component A was assessed by measuring the unit weight and the flow time on the fresh component A (i.e. within 10 minutes after the production) while the bleeding was assessed after 1, 3, and 24 hours after the component A production. The gelation of the grout obtained by turbulently mixing component A and component B has been assessed by measuring the gel time. Finally, the hardened grout has been characterised by assessing the surface compression strength (SCS) after 1 and 3 hours of curing.

3.3.1 Unit weight

The unit weight was assessed by using a mud balance (Figure 3), according to the standard ASTM D4380 (2020).



Figure 3. Mud balance used for the unit weight assessment. (Todaro et al., 2023).

3.3.2 Flow time

The flow time was assessed by using the Marsh funnel (Figure 4), in line with UNI 11152-13 (2005). This test provides indications on the viscosity of the tested material. The outcome of the test is the time spent by 1 L of mortar to flow through the funnel. The higher the viscosity of the mortar, the higher the flow time.



Figure 4. Marsh funnel used for the flow time assessment (Todaro et al., 2023).

3.3.3 Bleeding

The bleeding test allows the evaluation of the physical stability of component A. The test has been carried out according to UNI 11152-11 (2005). A standardised cylinder is filled with 1 L of component A, to which particles of cement tend to settle on the bottom of the cylinder due to the gravity force, leaving a layer of water on the top of the surface. After a certain time, the volume of the segregated water is measured (V_w), and by computing the ratio on the whole volume of 1 L (V_t), the bleeding index is computed, expressed as a percentage according to equation (1):

$$\text{Bleeding} = \frac{V_w}{V_t} (\%) \quad (1)$$



Figure 5. Bleeding assessment. (Todaro et al., 2023).

3.3.4 Gel time

The gel time has been assessed by following the experimental procedure proposed by Todaro et al. (2019) and used also by André et al. (2022). Once the quantities of components A and B are metered and prepared according to the mix design, component A is poured into component B; after that the whole material is quickly poured again in the empty tank and so on with subsequent series of pouring. The time recorded started when the first contact between components A and B occurred, and ended when the grout is not able to flow.

3.3.5 Surface compression strength (SCS)

The surface compression strength (SCS) has been assessed according to the procedure proposed by Todaro et al. (2020). A dynamometer was equipped with a flat circular bit having a surface of 177.9 mm² (A in equation 2) (Figure 6).

The test consists of the penetration of the bit orthogonally on the cast surface of the grout (previously cast in moulds with the shape in compliance to CEN (2016) and cured for 1 or 3 hours in a sealed environment) till a penetration of 5 mm is reached. The maximum force (F in equation 2) reached during the test is recorded. SCS is consequently computed according to equation (2) where F is expressed in N.



Figure 6. Dynamometer used for the surface compression strength assessment during the test. Todaro et al. (2020).

$$\text{SCS} = \frac{F}{A} \quad (2)$$

According to the reference standard, tests have been performed without demould samples. At least 6 tests were carried out for each assessment performed after 1 hour, while between 3 and 6 determinations were performed for testing after 3 hours of curing. The reason for a higher number of assessments at 1 hour of curing is related to the higher dispersion observed.

4 RESULTS

The obtained outcomes are summarised in Table 3.

Table 3. Used mix designs.

| Mix design | 1M | 2M | S |
|--------------------|------|------|------|
| Unit weight (kg/L) | 1.20 | 1.27 | 1.17 |
| Flow time (s) | 36.0 | 38.0 | 34.5 |
| Gel time (s) | 7 | 4 | 8 |
| SCS 1h (MPa) | 0.38 | 0.45 | 0.41 |
| SCS 3h (MPa) | 1.65 | 1.71 | 1.62 |
| Bleeding 1h (%) | 0.3 | 0.0 | / |
| Bleeding 3h (%) | 0.68 | 0.00 | 1.04 |
| Bleeding 24h (%) | 3.10 | 2.40 | 2.09 |

5 DISCUSSION

Taking into account the unit weight, an increment of values is recognised for 1M and 2M compared to R. The higher weight for a fixed volume of the considered component A is due to the replacement of a certain amount of water with the marble sludge. However, values of 1.2-1.3 kg/L are typically

accepted in construction sites, therefore it can be stated that compliance has been respected.

On the other hand, a significant reduction in gel time was observed. If for 1M the reduction is only of 1 s (a time lapse consistent with the test error), the gel time of 2M is half of those of R. The value of 4 s is very short, hardly applicable in standard practices, and not commonly acceptable in construction sites. Probably, the gelation between components A and B is affected by the presence of the marble sludge that plays an active role as a further booster of the reaction.

Considering the flow time, a slow increase has been observed (about 4 % and 10 %, respectively for 1M and 2M) compared to the flow time of the mix R, but then again, these values are accepted in common practice.

Optimal results have been obtained for the bleeding test, despite the presence of the marble sludge and consequently the tendency of these particles to segregate (similarly to the concrete ones), bleeding values are lower than 1% after 3 hours and abundantly lower than 8% (the threshold commonly fixed for construction sites) after 1 day.

As for the strengths at short curing time, 2M seems to be more performant than R: values greater than about 10 % and 6 % compared to the reference mix design have been obtained for a curing time of 1 hour and 3 hours respectively. Differently, 1M exhibits similar results compared to R (for 1 hour of curing, the strength was lower than that of the reference mix).

6 CONCLUSIONS

This work describes a preliminary test campaign where marble sludge, a material considered as waste in the ornamental stone supply chain, is reused in a tunnelling application. The preliminary nature of the work is related to the used mix designs; in fact, starting from a real two-component grout mix, no variations on dosages of raw ingredients have been applied: only the water has been replaced by the marble sludge in a quantity dictated by the sludge dosages and the respective unit weights. This choice was dictated by the need to check the potential impact of the new ingredient on the two-component grout technology by monitoring the reference parameters and their “fluctuations” in presence of the new ingredient.

Despite this limitation, the results highlighted the concrete possibility of giving the marble sludge a noble use as an ingredient in the two-component grout technology, as backfilling in tunnelling applications. No breach has been actually identified, granted that the gel time could extend by increasing the dosage of the retarding/fluidifying agent. It is also important to note that an increment of the retarding/fluidifying agent could allow the increase of the marble sludge dosage that, according to the

presented results, could turn into higher strength performances. In conclusion, the preliminary outcomes reported in this study highlight that the innovative grout has similar properties to the standard one and that adding marble sludge does not worsen the grout's properties.

Results presented in this paper should be considered as a first step of the research since further analyses on mechanical and elastic performance at long curing time should be carried out before transferring the technology to a pilot construction site.

The research is currently on-going.

ACKNOWLEDGMENTS

The authors want to thank Utt Mapei for chemical ingredients and Buzzi Unicem for cement.

FUNDING

This publication is part of the project NODES which has received funding from the MUR - M4C2 1.5 of PNRR funded by the European Union - NextGenerationEU (Grant agreement no. ECS00000036).

REFERENCES

- André, L., Bacquié, C., Comin, G., Ploton, R., Achard, D., Frouin, L., Cyr, M., 2022. Improvement of two-component grouts by the use of ground granulated blast furnace slag. *Tunn. Undergr. Sp. Tech.* 122, 104369. <https://doi.org/10.1016/j.tust.2022.104369>.
- ASTM D4380, 2020. Standard Test Method for Determining Density of Construction Slurries. American Society for Testing and Material International.
- CEN. 2011, Cement. Composition, specifications and conformity criteria for common cements. EN 197-1:2011. European Committee for Standardization, Bruxelles (B).
- CEN. 2016, Methods of testing cement - part 1: determination of strength. EN 196-1:2016. European Committee for Standardization, Bruxelles (B).
- Cobo-Ceacero, C.J., Cotes-Palomino, M.T., Martínez-García, C., Moreno-Maroto, J. M., Uceda-Rodríguez, M., 2019. Use of marble sludge waste in the manufacture of eco-friendly materials: applying the principles of the Circular Economy. *Environ Sci Pollut Res* 26, 35399–35410 (2019). <https://doi.org/10.1007/s11356-019-05098-x>
- Fargnoli, V., Boldini, D., Amorosi, A., 2013. TBM tunnelling-induced settlements in coarse-grained soils: The case of the new Milan underground line 5. *Tunn. Undergr. Sp. Tech.* 38, 336–347. <https://doi.org/10.1016/j.tust.2013.07.015>.
- Grasso, P., Lavagno, A., Brino, G., Cardu, M., Martinelli, D., Todaro, C., Carigi, A., Cotugno, G., Peila, D., Concilia, M., Bechter, S., Bringiotti, M., Nicastro, D., Manassero, V., Peinsitt, T., Santarelli, S., 2023. In: Bilotta, E., Casale, R., di Prisco, C.G., Miliziano, S., Peila, D., Pigorini, A., Pizzarotti, E.M. (Eds), *Handbook on Tunnels and Underground Works: Volume 2: Construction – Methods, Equipments, Tools*

- and Materials. CRC Press, Boca Raton, London, New York, Leiden, pp. 11–216. DOI: 10.1201/9781003306467-2.
- Oggeri, C., Oreste, P., Spagnoli, G., 2021. The influence of the two-component grout on the behaviour of a segmental lining in tunnelling. *Tunn. Undergr. Sp. Tech.* 109, 103750. <https://doi.org/10.1016/j.tust.2020.103750>.
- Schulte-Schrepping, C., Breitenbücher, R., 2019. Two-component grouts with alkali-activated binders - Proceedings of the ITA-AITES World Tunnel Congress 2019, Naples (IT), May 3–9.
- Song, W., Zhu, Z., Pu, S., Wan, Y., Huo, W., Peng, Y., 2022. Preparation and engineering properties of alkali-activated filling grouts for shield tunnel. *Constr. Build. Mater.* 314, 25620. <https://doi.org/10.1016/j.conbuildmat.2021.125620>.
- Song, W., Zhu, Z., Pu, S., Wan, Y., Huo, W., Song, S., Zhang, J., Yao, K., Hu, L., 2020. Synthesis and characterisation of eco-friendly alkali-activated industrial solid waste-based two-component backfilling grouts for shield tunnelling. *J. Clean. Prod.* 266, 121974. <https://doi.org/10.1016/j.jclepro.2020.121974>.
- Thewes, M., Budach, C., 2009. Grouting of the annular gap in shield tunneling – an important factor for minimisation of settlements and production performance - Proceedings of the ITA-AITES World Tunnel Congress 2009, May 23-28, Budapest (HU).
- Todaro, C., Bongiorno, M., Carigi, A., Martinelli, D., 2020. Short term strength behavior of two-component backfilling in shield tunneling: comparison between standard penetrometer test results and UCS. *Geoenviron. Ambient. Miner.* 159 (1), 33–40.
- Todaro, C., Martinelli, D., Boscaro, A., Carigi, A., Saltarin, S., Peila, D., 2022. Characteristics and testing of two-component grout in tunnelling applications, *Geomechanics and Tunnelling*, (2022) 1.
- Todaro, C., Pace, F., 2022. Elastic properties of two-component grouts at short curing times: The role of bentonite. *Tunn. Undergr. Space Technol.* 130, 104756. <https://doi.org/10.1016/j.tust.2022.104756>.
- Todaro, C., Peila, L., Luciani, A., Carigi, A., Martinelli, D., Boscaro, A., 2019. Two component backfilling in shield tunneling: laboratory procedure and results of a test campaign. In: Proceedings of the ITA WTC World Tunnel Congress 2019, Naples (IT), May 3–9. 10.1201/9780429424441-340
- Todaro, C., Zanti, D., Carigi, A., Peila, D., 2023. The role of the bentonite in two-component grout: a comparative study. *Tunn. Undergr. Sp. Tech.* In Press.
- UNI 11152-11, 2005. Sospensioni acquose per iniezioni a base di leganti idraulici - Caratteristiche e metodi di prova. Ente nazionale italiano di unificazione.
- UNI 11152-13, 2005. Sospensioni acquose per iniezioni a base di leganti idraulici - Caratteristiche e metodi di prova. Ente nazionale italiano di unificazione.