

Valorization of large-scale supply of carbonated water: A review

Original

Valorization of large-scale supply of carbonated water: A review / Lian, Justin Z.; Dimitrova, Yasmina; Fasano, Matteo; Sen, Indraneel; Cucurachi, Stefano. - In: JOURNAL OF CO2 UTILIZATION. - ISSN 2212-9820. - ELETTRONICO. - 85:(2024). [10.1016/j.jcou.2024.102884]

Availability:

This version is available at: 11583/2991844 since: 2024-08-22T12:53:23Z

Publisher:

ELSEVIER SCI LTD

Published


DOI:10.1016/j.jcou.2024.102884

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)



Review Article

Valorization of large-scale supply of carbonated water: A review

Justin Z. Lian^{a,1}, Yasmina Dimitrova^{b,1}, Matteo Fasano^c, Indraneel Sen^{b,*}, Stefano Cucurachi^{a,*}^a Leiden University, Institute of Environmental Science – Industrial Ecology, Van Steenisgebouw, Einsteinweg 2, Leiden 2333 CC, the Netherlands^b Wasabi Innovations Ltd, Boulevard Tsarigradsko Shose, No. 111B, building Incubator, Sofia 1784, Bulgaria^c Department of Energy, Politecnico di Torino, Corso Duca degli Abruzzi 24, Torino 10129, Italy

ARTICLE INFO

Keywords:

Carbonated water
Enhanced Oil Recovery
Carbon dioxide utilization
Healthcare & Medical Sector
Agricultural Innovation

ABSTRACT

While the use of carbonated water in enhanced oil recovery (EOR) within the petroleum sector is well-documented, its applications in other fields remain relatively unexplored. This review aims to shed light on the versatile utility of carbonated water across various sectors, with the objective of stimulating further research to address sustainability challenges. Carbonated water can benefit industrial, agricultural, and domestic contexts by offering a sustainable method for utilizing waste CO₂. This review examines the diverse applications of carbonated water, including its role in enhancing oil recovery, aiding medical and healthcare research, reducing carbon footprint in construction, influencing biofuel production and green chemistry, and contributing to the agricultural sector, household, and cleaning domains. The findings suggest that carbonated water could serve as a viable source for CO₂ utilization, presenting significant advantages across various fields. Despite initial costs and infrastructure requirements, integrating carbonated water into existing practices - especially in agriculture and food production - offers clear benefits for offsetting carbon emissions. Continued research and development are essential to advance these technologies and promote sustainable and environmentally responsible practices. We assert that ongoing research and innovation are crucial to unlocking the full potential of carbonated water in various emerging applications.

1. Introduction

Greenhouse gas emissions are widely recognized as a major contributor to the severity of climate change [1,2]. In response to this critical environmental issue, recent years have seen increased exploration of carbon utilization and conversion techniques [3–7]. Among these strategies, carbonated water has emerged as a versatile resource with applications in multiple areas - industrial, agricultural and domestic sectors. This paper reviews the utilization of carbonated water across these distinct sectors, aiming to provide an understanding of its applications and potential benefits.

Carbonated water, generally recognized as sparkling water or soda water, is water in which CO₂ gas has been dissolved under elevated

pressure [8]. One of the primary applications of Carbonated Water Injection (CWI) is in Enhanced Oil Recovery (EOR) within the oil and gas sector [9,10]. EOR techniques are employed to increase crude oil extraction from mature reservoirs where conventional primary and secondary recovery methods have reached their limits. CWI involves injecting carbonated water into the oil reservoir to enhance EOR. The dissolved CO₂ in the carbonated water diffuses into the crude oil, reducing its viscosity and altering the interfacial tension between oil and water, thus increasing the oil's mobility. This viscosity reduction facilitates the flow of crude oil toward production wells, leading to improved recovery rates [9,11]. Additionally, the injected CO₂ can interact with the reservoir rock, changing wettability and capillary forces to further enhance oil displacement and recovery [8,12]. Recent advancements in

Abbreviations: ACWI, Active Carbonated Water Injection; APW, Accessible porosity for water; CBI, Carbonated Brine Injection; CSWI, Carbonated Smart Water Injection; CWI, Carbonated Water Injection; CEOR, Chemically Enhanced Oil Recovery; CA, Contact Angle; DBD, Dry Bulk Density; EOR, Enhanced Oil Recovery; FMD, Flow-mediated dilation; GERD, Gastroesophageal reflux disease; IFT, Interfacial tensions; IoT, Internet of Things; LABSA, Linear Alkylbenzene Sulfonate; LCA, Life Cycle Assessment; LSCW, Low Salinity Carbonated Water; MNB, Micro-nano Bubble; NA, Natural Aggregate; PA, Popliteal Artery; RMA, Recycled Masonry Aggregate; RED, reverse electrodialysis; TEA, Techno-economic Assessment; VOC, Volatile Organic Compound.

* Corresponding authors.

E-mail addresses: indraneel.sen@wasabi-innovations.eu (I. Sen), s.cucurachi@cml.leidenuniv.nl (S. Cucurachi).¹ Justin Z. Lian and Yasmina Dimitrova have contributed equally.<https://doi.org/10.1016/j.jcou.2024.102884>

Received 1 December 2023; Received in revised form 22 July 2024; Accepted 22 July 2024

Available online 1 August 2024

2212-9820/© 2024 The Author(s). Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

CWI technology have focused on optimizing the injection parameters, such as CO₂ concentration, injection rates, and reservoir characteristics, to maximize both oil recovery and CO₂ storage potential [11,13–16]. Furthermore, numerical simulations and laboratory experiments have been conducted to understand the complex interactions between carbonated water, crude oil, and reservoir rock, providing valuable insights for field-scale implementation [17,18].

In this review paper, we explore the further application of carbonated water in the medical and healthcare field, including swallowing behavior [19], medical imaging [20], dental care [21], cardiovascular health [22–24], and physiological research [25]. For instance, research has highlighted carbonated water's effectiveness in enhancing dental implant biofilm removal through intensified cavitation, which could potentially transform dental cleaning methods [21]. It has also been investigated for improving dentin debris removal during root canal treatments, thanks to its enhanced bubble formation during ultrasonic activation, leading to better cleaning outcomes [26]. In medical imaging, carbonated water has shown potential as a medium for Doppler ultrasound imaging, offering clearer flow information and improved signal sensitivity [20]. Additionally, consuming carbonated water alongside medication may facilitate faster and more consistent drug absorption, presenting therapeutic possibilities [25].

Within the industrial sector, carbonated water has merit for construction materials, particularly cement-based products [8,12]. By replacing normal mixing water with carbonated water, the carbon sequestration capacity of porous cement-based materials is enhanced, reducing their carbon footprint [12]. Additionally, carbonated water facilitates accelerated carbonation, which naturally occurs slowly. This is crucial for industries aiming to reduce environmental impact and promote circular economy principles by incorporating waste materials, such as recycled aggregates, into production processes [8].

In the agricultural sector, studies have demonstrated that carbonated water can enhance plant growth and yield by improving nutrient uptake, pH regulation, enhanced photosynthesis, and potential hormonal effects [27]. In addition, research has highlighted the benefits of carbonated water for plant productivity, emphasizing its positive effects on soil quality, CO₂ enrichment, and various growth factors [28]. Recently, utilizing CO₂-enriched micro-nano bubble (MNB) technology to enhance Amaranth growth has shown promising potential for vegetable cultivation [29].

To our knowledge, most literature reviews have focused on the application of carbonated water injection in the petroleum sector, particularly for EOR [30–38]. However, there has not yet been a comprehensive review on the use of carbonated water in the industrial and agricultural sectors. Therefore, our examination of these diverse applications aims to provide a holistic understanding of carbonated water's versatility and practical utility. We aim to provide valuable insights that are applicable across various contexts and to inspire further research in the industrial, agricultural, and domestic sectors.

2. Methods

To explore the literature on the application of carbonated water in industrial and agricultural domains, we conducted a comprehensive search using reputable academic platforms. We utilized Elsevier's ScienceDirect [39] for research journals, the Web of Science platform for the SCIE Science Citation Index Abstracts database [40], as well as other commonly employed databases such as Scopus [41], Google Scholar [42] and ResearchGate [43]. Our search focused on keywords such as "Carbonated Water Applications", "CO₂ Saturated Water", "Sparkling Water" and "Soda Water". To detail the searches, we also applied the following key phrases: "Carbonated Water in Oil/Petroleum industry", "Carbonated Water in the construction sector", "Carbonated Water and construction materials" and "Carbonated Water and health care", "Carbonated Water and Biofuel/Chemistry/Energy", "Carbonated Water in Agriculture". We identified and reviewed a total of 110 papers (as

illustrated in Fig. 1) using the PRISMA (Preferred reporting items for systematic review and meta-analysis protocols) [44,45] method, which helped us screen and exclude literature based on inclusion criteria to ensure relevance [44,45]. Our review concentrated on the two primary application fields: industrial and agricultural. In Section 3, we discussed the primary role of carbonated water in the petroleum industry, particularly in Enhanced Oil Recovery (EOR). While EOR research is the most extensive, there is also significant literature on the use of carbonated water in health and medical fields, construction materials, and chemical industries. This review aims to cover these diverse applications comprehensively. The use of carbonated water in agriculture is analyzed in Section 4, based on two comprehensive review articles. Additionally, the practical uses of carbonated water in everyday life, such as in cleaning, are discussed in Section 5 as adjunct applications.

3. Industrial use of carbonated water

3.1. Carbonated water in the oil industry

3.1.1. Carbonated Water Injection (CWI) technology

This section explores the potential of Carbonated Water Injection (CWI) as an Enhanced Oil Recovery (EOR) method, evaluating its effectiveness, adaptations, and the use of nanoparticles to enhance CO₂ solubility. Additionally, it examines modeling simulations for practical CWI applications.

Reservoirs often lack the natural pressure required for effective oil extraction [36,46,47]. Common methods like gas injection or water flooding are used to enhance recovery [30], but gas injection alone faces limitations such as efficiency issues, pressure drops, corrosion, gravity override, reservoir compatibility, gas availability, miscibility, and potential environmental risks [15,48,49]. These challenges have led to research into alternatives like carbonated water injection [35,36,46,47]. In CWI, CO₂ from industrial processes or natural gas fields is combined with water to create carbonated water, which is then injected into reservoirs via dedicated wells [9,31,32,38]. Carbonated water acts as a key transport medium for CO₂ [50], which, when released into the reservoir, leads to oil swelling, viscosity reduction, and decreased surface tension of oil droplets, facilitating their coalescence [32,46,51]. Additionally, changes in water layer thickness or reduced distances between oil droplets can promote contact and merge between them. The coalescence of trapped oil ganglia, therefore, can reduce the number of small oil droplets and increase the size of larger oil masses, making them easier to be carried out of the porous medium and thus enhancing oil recovery efficiency [52].

Local flow diversion in CWI occurs when certain pores become less permeable due to oil blockage, variations in water layer thickness, emulsions, or uneven gas pressure distribution [53,54]. Consequently, the fluid (including water and dissolved CO₂) seeks out more permeable pathways, bypassing the obstructed areas. The flow diversion can contribute to the redistribution of fluid towards previously unaffected regions, thereby increasing the contact area with oil and enhancing oil recovery efficiency [53,54]. Research has confirmed the effectiveness of CWI in enhancing oil recovery and contributing to CO₂ sequestration [13,18,33,37,55]. Key operational parameters such as CO₂ concentration and injection flow rates, critically impact CWI performance and oil recovery rates [56].

Ahmadi et al. emphasized the importance of flow rates and CO₂ concentrations in CWI, achieving final recovery rates between 32.3 % and 40.6 % [57]. This outperformed conventional water flooding, which achieved only 30 % in-situ crude oil recovery after 60 years. Esene et al. [51] conducted a sensitivity analysis revealing that changes in injection rate and pressure significantly affected oil recovery. Higher injection rates could increase recovery by 6 % while raising injection pressure improved CWI performance by up to 16 %. The advantages of CWI are evident in the secondary and tertiary oil recovery stages. Mahzari et al. [11] found that secondary CWI recovered 26 % more oil than

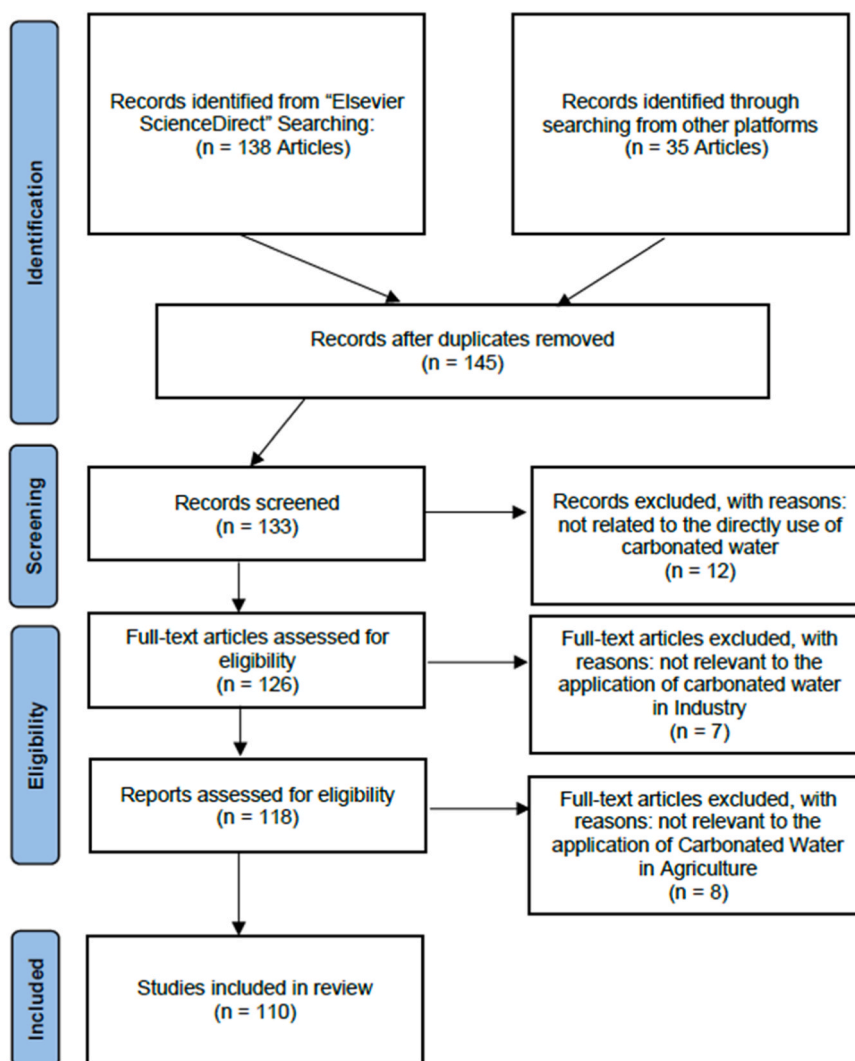


Fig. 1. The process of collecting application of carbonated water literature by the PRISMA method.

conventional seawater injection, due to CO₂ transfer from carbonated water to oil, leading to oil swelling and reduced residual oil saturation [31]. Tertiary injection following secondary injection resulted in a 12.5 % increase in oil recovery, as reported by Mosavat et al. [56], significantly enhancing oil recovery compared to conventional water flooding. The operational conditions and their effects are summarized in Table 1.

3.1.2. Carbonated Water Injection and adaptations

Several investigations have illuminated the utility of CWI and its various adaptations, such as Carbonated Brine Injection (CBI), Carbonated Smart Water Injection (CSWI), and Active Carbonated Water Injection (ACWI) [59–62]. These methods incorporate saline ions (sodium, chloride, calcium), modify specific ions (calcium, magnesium, sulfate), or apply surfactants to lower contact angles (CA), thereby improving the wettability of reservoir rock and enhancing oil displacement [59–61, 63]. Some techniques also reduce interfacial tensions (IFT) between oil and carbonated water, aiding oil expulsion [64–67].

Nowrouzi et al. [61] reviewed CSWI and found it significantly boosted oil recovery in carbonate reservoirs. Their work demonstrated a notable reduction of CA to 18.75° (for Gachsaran oil as shown in Fig. 2A). This wettability enhancement translated into a remarkable 78 % increase in oil recovery. Manshad et al. [59] explored the impact of water-soluble ions and dissolved CO₂ on wettability and oil production,

showing that smart water injection alone could boost oil production by up to 33 %. Combining it with CO₂ further enhanced recovery due to altered carbonate rock wettability. Jia's study [18] proposed methods for measuring CO₂ solubility and CA in brine, highlighting CWI as a promising alternative to conventional CO₂ flooding, especially for high-salinity carbonate reservoirs. Given the positive effect of low-salinity EOR [68], Rahimi et al. [69] evaluated the influence of Low Salinity Carbonated Water (LSCW) on IFT. Surprisingly, their study found that combining low-salinity water with carbonated water could significantly reduce the IFT between oil and brine, with reductions of up to 51.8 %. These studies collectively shed light on the potential of CSWI and related techniques to enhance oil recovery in carbonate reservoirs, offering valuable insights for the industry.

Furthermore, utilizing surfactants in carbonated water can also achieve efficient oil recovery and perform well in ultra-low permeable reservoirs. One inspiring work conducted by Du et al. optimized the concentrations of surfactants Linear Alkylbenzene Sulfonate (LABSA) and Cetyltrimethylammonium Bromide (CTAB) at 300 ppm and 350 ppm respectively [70]. Moreover, a CO₂ concentration of 750 mg/L yielded the highest oil recovery. Therefore, the adjustment above led to a notable oil recovery increase of around 34 % [70]. In another laboratory study, Chen and colleagues investigated the potential of ACWI to enhance oil recovery in low-permeable reservoirs [63]. The study used various injectivity scenarios and surfactant concentrations. They

Table 1
Operational conditions and enhanced recovery mechanisms for carbonated water injection in oil fields.

Category	Process/ Mechanisms	Effect/Description	References
Operational Conditions	Higher pressure and lower water salinity	Enhance recovery effectiveness.	[35,36,46,47]
	Co-solvents like methanol and acetone; Temperature-pressure effects	Boost CO ₂ dissolution.	[32,46,58]
	Lower injection rates	Improve oil recovery.	[13,18,33,37,55]
Enhanced Recovery Mechanisms	Carbonated water swells oil due to mass transfer	Reduce viscosity and promote interconnection; Decrease interfacial tension between water and oil.	[32,46,58]
	Alters wettability to water-wet	From oil-wet to water-wet.	[13,18,33,37,55]
	Carbonated water forms a new gas phase	Block paths and increase production.	[51,56]
	Coalescence of trapped oil ganglia	Oil droplets coalesce, forming larger droplets and facilitating easier recovery.	[52]
	Local flow diversion	Directs oil droplets toward collection points.	[53,54]

ultimately identified 0.6 PV of LABSA as the optimum surfactant concentration. One of the most striking results was that ACWI could boost the oil recovery factor by 64 %. This outcome highlights the efficacy of combining surfactants with CWI in challenging reservoir conditions. However, since its scope was limited to laboratory conditions, further research is needed to validate these results in real low-permeable reservoir applications.

In addition, the CWI combined activating solution gas drive method can enhance oil recovery [71,72]. Shakiba et al. [71] showed that CWI improved oil recovery efficiency and following a solution gas drive can further enhance recovery. The results are compelling: more than 25 % of the original oil in place was recovered after secondary CWI tests, and over 18 % was recovered after tertiary CWI tests. Alqam et al. [73] combined pendant drop tests and molecular dynamics simulations to understand how adding carbon dioxide affects these interactions. They found that carbonated water shifts wettability from weakly oil-wet to intermediate to water-wet. Molecular simulations reveal that these changes were due to altered IFT and asphaltene swelling driven by interactions with carbon dioxide. This research highlights carbonated water's potential for enhanced oil recovery and offers insights into the mechanisms behind this wettability shift.

3.1.3. Nanoparticles

Nanomaterials can enhance CO₂ solubility in carbonated water [74], impacting EOR and CO₂ sequestration [75,76]. Sun et al. discovered that SiO₂-enhanced carbonated water increased CO₂ solubility by an impressive 17 % and displayed superior stability [76], although its applicability was limited at elevated temperatures. Nowrouzi et al. examined the influence of TiO₂, MgO, and γ -Al₂O₃'s on CO₂ solubility, highlighting their role in reducing IFT in Chemically Enhanced Oil Recovery (CEOR) [75]. Their research suggests combining nanoparticles with carbonated water could enhance oil recovery and significantly reduce IFT, with variables such as temperature, salinity, nanoparticle concentration, and pressure affecting the outcomes. In a pioneering effort, Chaturvedi and Sharma [14] investigated the innovative use of

polymeric nanoparticle suspensions in carbonated water to enhance oil recovery from sandstone reservoirs, improving CO₂ absorption and oil recovery. Salt in water reduces CO₂ loading and oil recovery efficiency, while higher temperatures negatively affect CO₂ absorption, as demonstrated in Fig. 2B. This introduces carbonated polymeric nanoparticle suspensions as a promising approach for EOR in sandstone reservoirs [14].

3.1.4. Modeling and simulations

Modeling and simulations of CWI offer valuable insights for practical operations [17,34,64]. Esene et al. [17] utilized a novel 3D heterogeneous reservoir model to assess factors, such as oil recovery, fluid distribution, operational parameters, and well placement. Their work highlighted CWI's merits in EOR with high sweep efficiency and CO₂ storage benefits. Injection pressure and well orientation are emphasized for improved performance, prompting further investigation into displacement mechanisms. Motie and Assareh [77] presented a modeling strategy to assess CWI for EOR and CO₂ sequestration in naturally fractured reservoirs, particularly during tertiary production. Their research reported a 10.6 % incremental oil recovery and highlighted the potential of trapping 3000 mol of CO₂ in the matrix. These outcomes address concerns about CO₂ emissions and the role of geological CO₂ storage as a solution, with a call for validation in different reservoir types and conditions. Mahzari et al. [10] proposed a method for simulating CWI in carbonated rocks, emphasizing short CWI cycles and geochemical intricacies. CWI's worth in EOR suggests future enhancements, including water preparation, CO₂ solubility, and reservoir selection, while geological research identifies suitable reservoirs. According to their study, oil recovery profiles from simulations show that tertiary injection with carbonated water offered a 6.2 % increase in oil recovery over regular water. In short, carbonated water injection cycles can achieve the same benefit while mitigating rock dissolution risks near the injection well, as depicted in Fig. 2C. Table 2 summarizes findings across different aspects of CWI for EOR, such as the efficacy of CWI, parameter analysis, wettability improvement, nanotechnology applications, and modeling simulations, and so on.

3.2. Application of carbonated water in health and medical fields

Carbonated water has diverse applications in healthcare and medical field, offering benefits in areas such as dental care [21], swallowing behavior, intestinal motility [26,78], pharmacokinetics [79–81], medical imaging [82], cardiovascular health [22–24], and psychological well-being [20].

3.2.1. Dentistry - removing biofilm from dental implants

The potential application of cavitation to enhance biofilm cleaning has attracted considerable interest within the research community. Currently, a lack of effective methods for the specific removal of biofilms from dental implants presents a significant challenge. Vyas et al. explored using carbonated water with an ultrasonic dental scaler to enhance biofilm removal in dental implants [21]. They found that cavitation, which aids in biofilm removal, significantly increased when the scaler operated in carbonated water, as shown in Fig. 3 A. Carbonated water facilitates earlier cavitation inception and generates a greater number of cavitation bubbles around the tip of the ultrasonic scaler. When these bubbles collapse, they exert shear forces on the surface to increase the cleaning effect. The collapse of bubbles could create microjets or acoustic streaming around oscillating bubbles, both of which contribute to surface cleaning. Furthermore, the use of carbonated water can increase the number of inertial collapsing bubbles on the surface, indicating that the increased level of carbonation enhances the ability to remove biofilm [21].

3.2.2. Enhancing dentin debris removal

Van der Sluis et al. [26] conducted a study to evaluate the

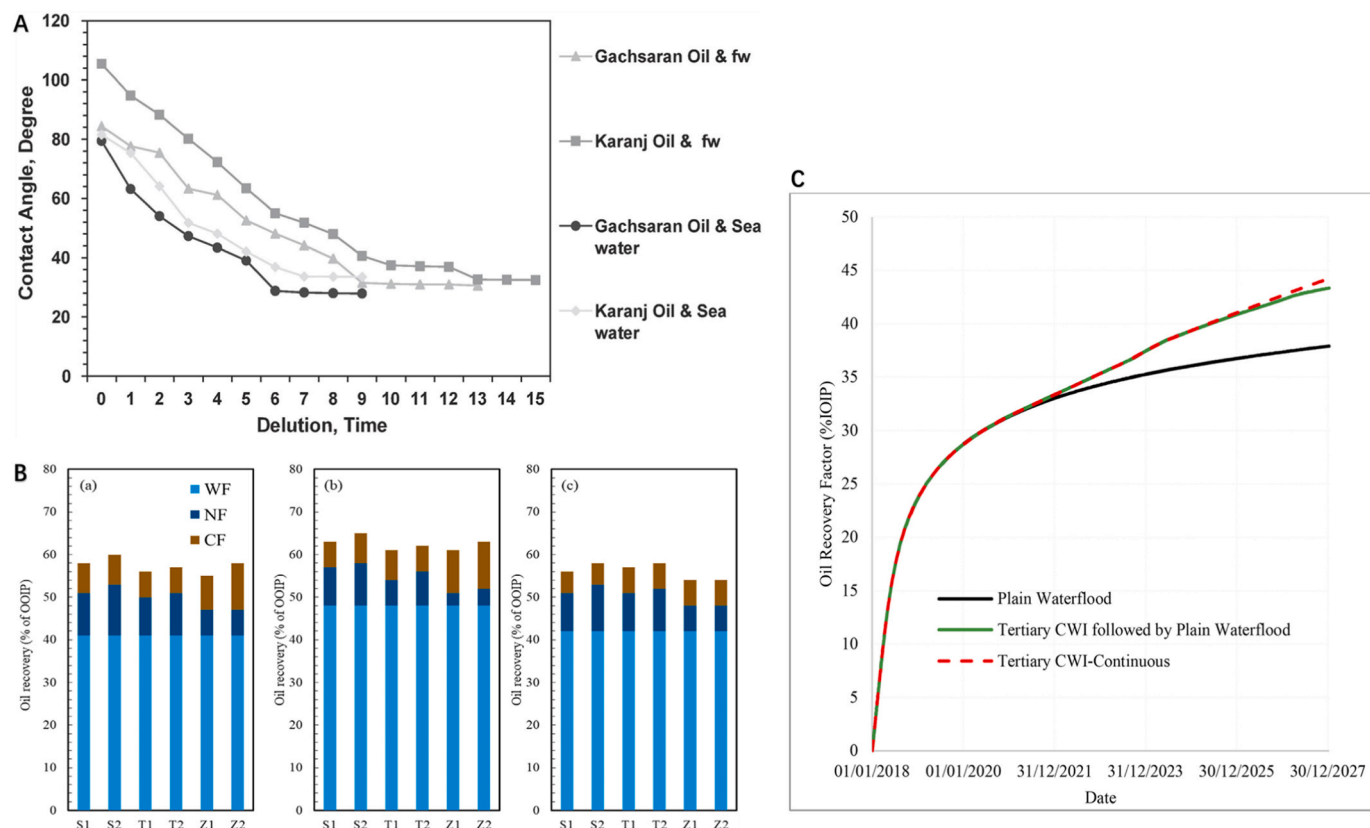


Fig. 2. (A) Carbonated water injection: the changes in contact angles of two droplets of oil on sections aged in different samples of saline water with different dilutions and aqueous bulk. Adapted with permission from Nowrouzi, et al. Copyright 2019 Elsevier. (B) The image compares oil extraction percentages for each injection phase under different conditions: (a) at 328 K with water-filled sand packs, (b) at 353 K with similar packs, and (c) from sand packs impregnated with 3% NaCl solution at 328 K. The abbreviations WF, NF, and CF indicate the methods used: water flooding, nanofluid flooding, and carbonated fluid flooding, respectively. Adapted with permission from Raghav, et al. Copyright 2020 Elsevier. (C) Profiles of oil recovery for three simulation cases. Tertiary carbonated water injection would lead to 6.2% additional oil recovery. Adapted with permission from Mahzari, et al. Copyright 2019 Elsevier.

effectiveness of ultrasonic activation in removing dentin debris from root canals using various irrigants, including 2 % and 10 % sodium hypochlorite, carbonated water, and distilled water. The study employed three refreshment/activation cycles utilizing the intermittent flush technique, specifically targeting root canals contaminated with dentin debris. The results reveal a cumulative benefit of ultrasonic activation coupled with intermittent flushing for three cycles. Despite the similarity in fluidic properties among the irrigants, which results in comparable flow characteristics, acoustic cavitation is a crucial factor. Notably, sodium hypochlorite proves to be significantly more effective in removing dentin debris compared to carbonated water, which in turn performs better than distilled water. The study further supports the observation that carbonated water exhibits accelerated bubble formation under ultrasonic activation, potentially enhancing its cleaning capabilities. However, further research is needed to investigate these mechanisms.

3.2.3. Doppler ultrasound imaging

Carbonated water shows merits in Doppler ultrasound imaging, offering clear and quantifiable flow information. Lee et al. conducted a study comparing carbonated water to traditional media for producing blood-like responses in ultrasound images [20]. They found that carbonated water delivered clear flow in Doppler ultrasound images, making it a viable medium for medical ultrasonic applications as clearly indicated in Fig. 3B. The application mechanisms of carbonated water in Doppler ultrasound technology lay in the fact that the bubbles contained in it can act as scatterers to effectively simulate the scattering effect of red blood cells in the blood. When carbonated water is introduced into

Doppler ultrasound scanning, these bubbles scatter under the action of ultrasonic waves, thus enhancing the sensitivity of Doppler signals. This principle makes carbonated water a simple and efficient material that can be used in Doppler ultrasound phantom design to simulate and evaluate blood flow conditions. Although the specific effects of carbonated water on solubility, bubble size, and blood flow simulation effects still need further study, this research initially confirms its significant advantages in Doppler ultrasound, providing a valuable reference for future related research and applications. Moreover, compared to other materials such as sugar water, saline, starch, and cooking oil, carbonated water can produce clearer and stronger scattering signals to make blood flow simulation more accurate and reliable [20].

3.2.4. Paracetamol absorption

Van Den Abeele et al. conducted a crossover investigation [81] to address variability in systemic drug exposure after oral administration. They studied the effects of consuming sparkling water alongside conventional paracetamol tablets in a fast state, using healthy volunteers. The study monitored antroduodenal motility and drug disposition over time, revealing transient pressure events in the upper gastrointestinal tract following the ingestion of sparkling water, as shown in Fig. 3C. When the drug was taken along with sparkling water, brief fluctuations in pressure were observable in the stomach and the upper section of the duodenum. However, when the drug was consumed with tap water, no such pressure changes were detected, as can be seen in Fig. 3C (a) for tap water and (b) for sparkling water. The study supports that co-administering paracetamol with sparkling water leads to faster and more consistent absorption due to direct effects on tablet dissolution and

Table 2
Summary of studies on Carbonated Water Injection (CWI) and its variants in Enhanced Oil Recovery (EOR).

Category	Key Findings	Reference
Efficacy of CWI	Overall effectiveness	Final recovery rates between 32.3 % and 40.6 %, outperforming conventional water flooding. [57]
	Secondary CWI	Secondary CWI recovers 26 % more oil than conventional seawater injection. [11]
	Tertiary CWI	Tertiary injection with carbonated water offers a 6.2 % increase in oil recovery over regular water. More than 25 % of original oil recovered after secondary CWI tests, and over 18 % after tertiary CWI tests. [10]
	CWI + Gas drive	Carbonated water shifts wettability from oil-wet to water-wet, aiding in oil recovery. [71]
	CO ₂ and water interaction	CSWI in carbonates 18.75° reduction in contact angle, 78 % increase in oil recovery. [73]
Wettability Improvement	Ions and CO ₂ Interaction	Smart water injection boosts oil production by 33 %; with CO ₂ , it enhances recovery further. [59]
	LSCW Impact	LSCW can significantly reduce the IFT between oil and brine. [69]
	Sensitivity analysis	Injection rate and pressure changes significantly affect oil recovery. [51]
Other Parameter Analysis	Surfactant optimization	Optimization of surfactant concentrations for better oil recovery. [70]
	CO ₂ solubility	SiO ₂ -enhanced carbonated water increases CO ₂ solubility by 17 %. The combination of nanoparticles and carbonated water can significantly reduce IFT and enhance oil recovery. [76]
Nanotechnology	IFT reduction	Carbonated polymeric nanoparticle suspensions enhance CO ₂ absorption and oil recovery. [75]
	Sandstone reservoirs	The 3D reservoir model highlights the high sweep efficiency and CO ₂ storage benefits of CWI. [14]
Modeling and Simulation	Reservoir modeling	Incremental oil recovery and potential CO ₂ trapping in fractured reservoirs. [17]
	Fractured reservoirs	

indirect impacts on gastrointestinal motility.

3.2.5. Drinking water and swallowing behavior

In studies concerning the swallowing behavior of patients, carbonated beverages have been demonstrated as a useful tool [19,78,83]. They notably reduce the duration of swallowing sounds, particularly in the later phases of the pharyngeal stage, potentially offering a solution for addressing swallowing difficulties in the aging population [19,78]. Morishita et al. investigated the impact of carbonated beverages on the swallowing behavior of elderly inpatients without dysphagia by employing cervical auscultation recordings [78]. They noted a decrease in swallowing sound duration after consuming carbonated drinks, especially in the late pharyngeal phase. This study implies that carbonated beverages have a real impact on the swallowing behavior of

this patient population, revealing how sensory stimulation, like carbonation, affects swallowing in older individuals.


Kubota et al. [84] aimed to explore the effects of drinking cold or carbonated water on blood pressure in both young and older adults. The results show that consuming cold carbonated water leads to a more significant increase in blood pressure compared to room temperature water in both age groups. The pressure response persisted during the recovery period and was more pronounced in older individuals. These findings suggest that even small amounts of cold and carbonated water can effectively raise blood pressure, making it a potential first-aid approach for certain types of acute hypotension. In addition, carbonated water has been found to enhance cerebral blood flow and improve emotional states [85]. Fujii et al. [23] conducted a study on the effects of carbonated water on cerebral blood flow and mood states in humans exposed to ambient heat stress [25]. They measured middle cerebral artery blood velocity and found that carbonated water increases cerebral blood flow. Participants reported reduced sleepiness, increased motivation, and exhilaration, and a blood pressure rise. A control group drank non-carbonated water at 4 °C for comparison. These findings suggest carbonated water can impact physiological parameters, including cerebral blood flow and blood pressure, and influence psychological states, especially under heat stress.

However, it is important to note that frequent consumption of carbonated water, despite its perceived health benefits, can harm dental health due to its acidic nature, potentially leading to enamel erosion, and compromising dental treatment adhesives [86]. Carbon dioxide, essential for bodily functions like regulating pH balance, respiration, and circulation is mostly lost during consumption, with a small portion absorbed in the digestive system. The association between carbonated beverages and Gastroesophageal reflux disease (GERD) is uncertain, with conflicting study results. These drinks can affect the stomach differently, potentially causing delayed emptying or increased belching. Furthermore, carbon dioxide absorption influences hydrochloric acid formation, which, when consumed excessively, can lead to stomach issues such as ulcers and gastritis [87].

3.2.6. Cardiovascular health

Endothelial dysfunction, which is linked to increased cardiovascular mortality, can be ameliorated by therapies that enhance blood flow and shear stress [24]. Nishimura et al. [24] examined the impact of repeated artificial CO₂ (1000 ppm) bathing on various physiological parameters in six healthy males. Participants immersed themselves in CO₂-rich water at 34 °C for 20 minutes daily over five days. The study found that tympanic temperature significantly decreased and cutaneous blood flow in the immersed skin significantly increased during CO₂ bathing (P < 0.05). Subjects also reported a warm sensation during the baths, with thermal sensation scores decreasing with repeated exposure.

Building on this foundation, a study by Ogoh et al. [23] hypothesized that CO₂-rich water could enhance endothelium-mediated vasodilation with reduced heat stress. In this investigation, 12 subjects underwent acute lower legs and feet immersion in mildly warm (38 °C) normal or CO₂-rich tap water (1000 ppm) for 20 minutes. The results indicated that CO₂-rich water immersion significantly increased flow-mediated dilation (FMD) (P < 0.01), while normal water did not affect FMD. The increase in FMD was positively correlated with changes in skin blood flow (P < 0.01), suggesting that enhanced skin blood flow improves endothelial function. Notably, normal tap water required heating to approximately 43 °C to achieve the same skin blood flow level as CO₂-rich water at 38 °C. A subsequent study by Ogoh et al. [22] further investigated the effects of carbonated water on vascular function. In this study, 10 men immersed their lower legs in either tap or carbonated water at 38 °C. The results show that immersion in carbonated water, but not tap water, significantly elevated popliteal artery (PA) blood flow (from 38 ± 14 to 83 ± 31 mL/min; P < 0.001) and skin blood flow (by 779 ± 312 %; P < 0.001). However, carbonation did not significantly affect gastrocnemius muscle oxyhemoglobin concentration or tissue

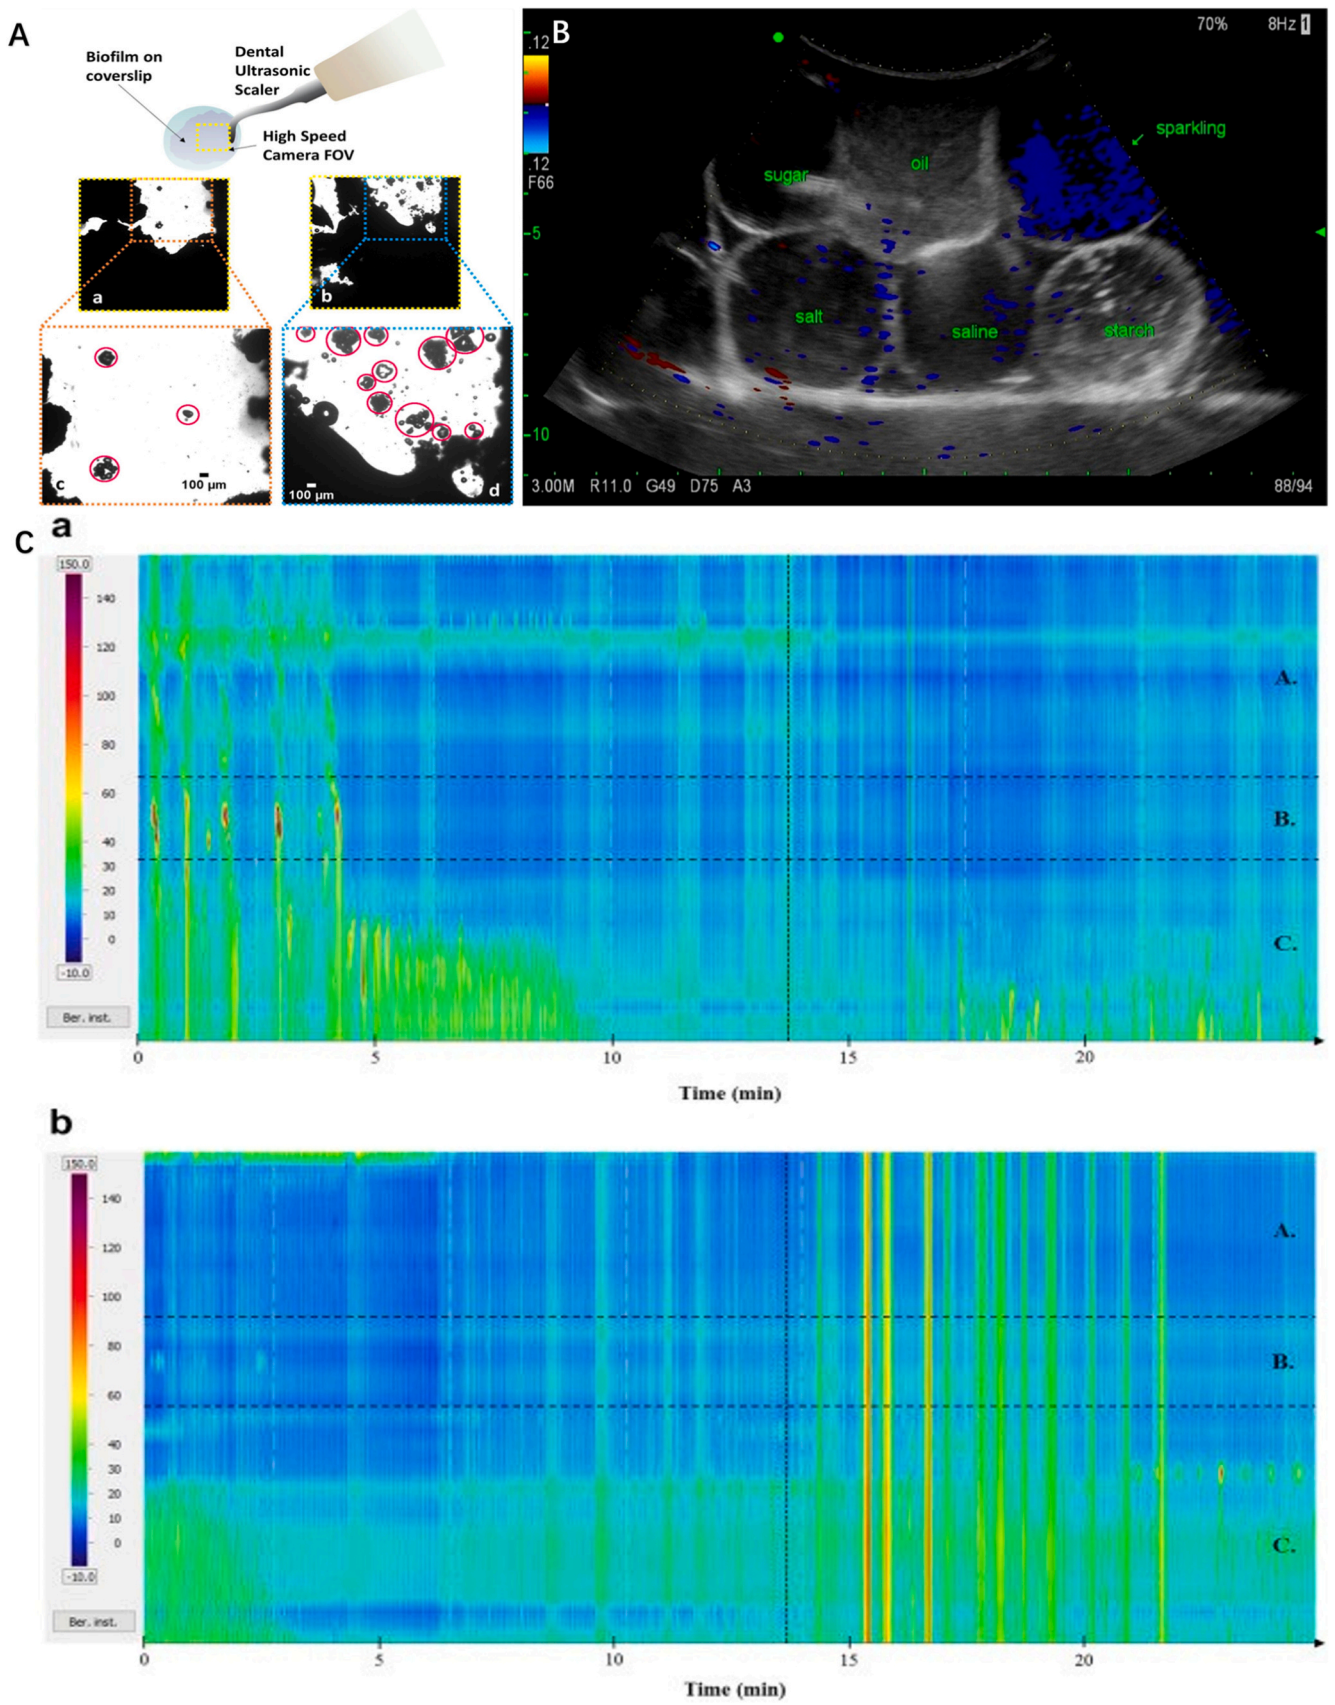

(caption on next page)

Fig. 3. (A) High-speed video captures show biofilm removal. Images reveal biofilm cleared by ultrasonic cavitation in still water (a, c) and carbonated water (b, d). Larger cavitating bubbles over 100 μm are marked in red, indicating increased bubble activity at the biofilm surface in carbonated water. Adapted with permission from Vyas et al. Copyright 2021 Elsevier. (B) Doppler was observed in carbonated water (sparkling), sugar water (sugar), cooking oil (oil), salt water (salt), distilled water (saline), and starch (starch) after setting the gain to 66. Adapted with permission from Lee et al. Copyright 2020 Elsevier. (C) Typical examples of high-resolution manometry recordings, which were captured after a healthy volunteer consumed one tablet of Dafalgan® (containing 500 mg of paracetamol) with either 330 mL of plain tap water (in example a) or 330 mL of sparkling water (in example b). Region A stands for the proximal part of the stomach (corpus), B for the distal part of the stomach (antrum), and C for the proximal duodenum. Colors indicate pressure amplitude (mm Hg). Adapted with permission from Van Den Abeele et al. Copyright 2017 Elsevier.

oxygenation index. The increase in PA blood flow was correlated with the increase in skin blood flow ($P = 0.005$), but not with oxyhemoglobin concentration ($P = 0.765$) or tissue oxygenation index ($P = 0.136$). These findings suggest that the increase in skin blood flow primarily drives the increase in PA blood flow due to carbonated water immersion. Collectively, these studies demonstrate that CO_2 -rich water immersion can improve endothelial-mediated vasodilator function and reduce arterial stiffness with minimal heat stress. This suggests potential therapeutic benefits for patients with cardiovascular disease. Key findings of carbonated water applications in medical and healthcare fields are summarized in Table 3.

3.3. Application of carbonated water in the construction industry

In recent years, the construction industry has sought innovative solutions to improve material properties, reduce carbon emissions, CO_2 sequestration, and recycle industrial waste. Although the use of carbonated water in construction materials is not yet widespread, pioneering studies have explored its potential applications [8,12].

Suescum-Morales et al. conducted a study assessing the use of carbonated water as a mixing solvent to enhance cement-based materials with recycled aggregates, as shown in Fig. 4A [8]. The study compared Natural Aggregate (NA) and Recycled Masonry Aggregate (RMA), finding that carbonated water improved mechanical properties and CO_2 sequestration by up to 181 %, especially with RMA compared to NA and regular water. No benefits were observed with NA after one-day curing. Still, this highlights carbonated water's potential to enhance performance and sustainability in cement-based materials with recycled aggregates, supporting sustainable construction goals.

Suescum-Morales et al. also explored using carbonated water as a mixing agent for incorporating recycled brick aggregates into porous cement-based materials [12]. They discovered that carbonated water effectively improved the mechanical properties and porosity of the materials by facilitating simultaneous hydration and carbonation. As demonstrated in Fig. 4B, across all mixtures examined, the use of carbonated water was found to enhance both the dry bulk density (DBD) and the accessible porosity for water (APW) of the mixtures. This was attributed to the carbonation reaction triggered by the carbonated water under controlled conditions. This reaction increased mechanical strength for both NA and RMA after seven days of curing. Additionally, a more intense presence of CaCO_3 peaks was observed in the X-ray diffraction analysis. During heating from 480 to 1000 $^\circ\text{C}$, a greater weight loss was detected due to the decomposition of calcite, as can be found in the thermogravimetric analysis/differential thermal analysis (TGA/DTA) in Fig. 4C.




For mixtures containing NA, normal water resulted in a 3.8 % mass loss, while carbonated water led to a 9.19 % mass loss within the 480–1000 $^\circ\text{C}$ range, suggesting greater CaCO_3 formation, as can be seen in Fig. 4C (A). For mixtures with RMA, as depicted in Fig. 4C (B), the mass loss was 5.5 % for normal water and 6.01 % for carbonated water in the same temperature range. The difference in calcium carbonate formation was less significant in the RMA mixture due to its complex composition and potential lower sensitivity to pH changes. The presence of impurities and variable particle sizes in RMA could also have influenced the carbonation process [12]. This research demonstrates the feasibility of using recycled brick aggregates and reinforces the potential of carbonated water to enhance construction materials.

Table 3
Key findings of applying carbonated water in the health and medical fields.

Category	Key Findings	Reference
Dentistry	Biofilm removal	Carbonated water with an ultrasonic dental scaler enhances biofilm removal from dental implants. [21]
	Dentin debris removal	Carbonated water aids in dentin debris removal from root canals, outperforming distilled water but less effective than sodium hypochlorite. Sparkling water consumption alongside paracetamol tablets leads to faster and more consistent drug absorption. [26]
Pharmacokinetics	Paracetamol absorption	Carbonated beverages reduce swallowing sound duration in elderly patients, aiding in swallowing difficulties. Consumption of cold and carbonated water increases blood pressure in young and older adults. [81]
Swallowing Behavior	Impact on elderly	Carbonated water enhances cerebral blood flow and improves mood states, especially under heat stress. [78]
Blood Pressure	Effects of cold/carbonated water	Carbonated water provides clear flow in Doppler ultrasound images, proving its efficacy in medical imaging. [84]
Psychological Well-being	Effects on mood and cerebral blood flow	Repeated CO_2 -rich water immersion increases cutaneous blood flow, lowers tympanic temperature. Lower leg immersion in 38 $^\circ\text{C}$ CO_2 -rich water enhances flow-mediated dilation and skin blood flow, while also increasing popliteal artery blood flow, improving endothelial function, and reducing arterial stiffness. [25]
Medical Imaging	Doppler ultrasound imaging	
Cardiovascular Health	Vascular function	

3.4. Carbonated water application for biofuels

Recent studies have aimed to optimize the conversion of biomass materials into sugars for biofuel production, particularly focusing on bioethanol. These environmentally friendly approaches have shown potential in reducing costs and enhancing efficiency in biofuel

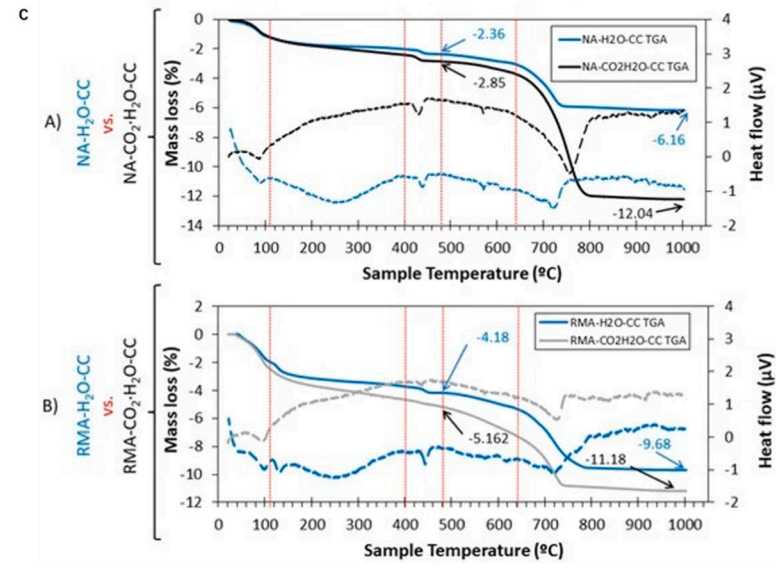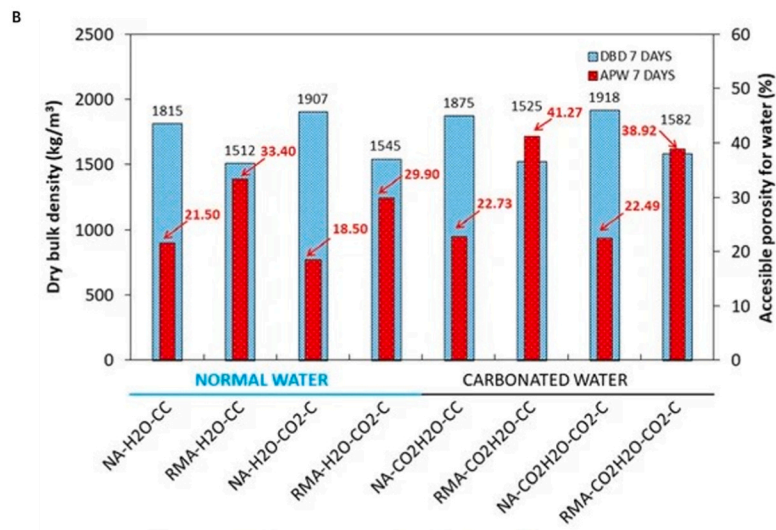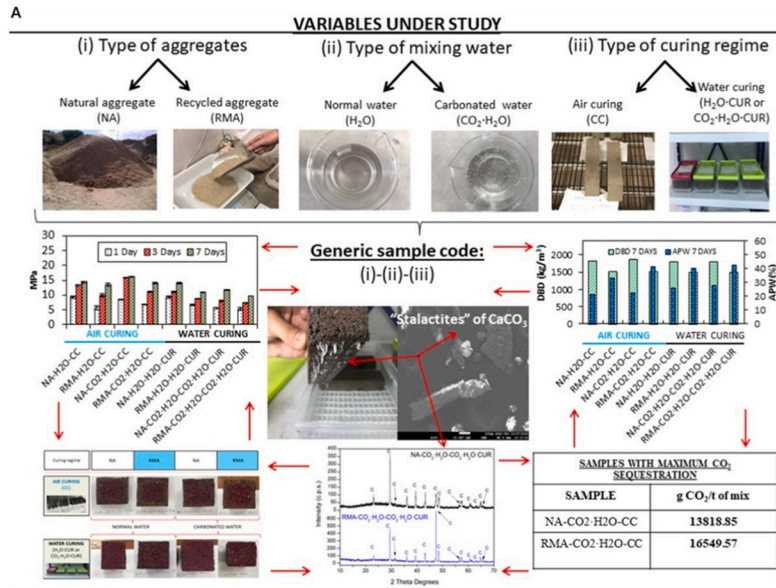

(caption on next page)

Fig. 4. (A) Assessment of the use of carbonated water as a mixing solvent to enhance the properties of cement-based materials with recycled aggregates. Adapted with permission from Suescum-Morales et al. Copyright 2022 Elsevier. (B) The utilization of carbonated water was found to enhance both the dry bulk density (DBD) and the Accessible porosity for water (APW) of the mixtures for both NA and RMA after seven days of curing. (C) The TGA (solid lines) and DTA (dotted lines) curves are presented for two different mixtures: A) the mixture containing NA, and B) the mixture with RMA. In both cases, the curves compare the use of normal water with the use of carbonated water. Adapted from Suescum-Morales et al. 2022.

production.

King et al. [88] explored the utilization of supercritical carbon dioxide dissolved in water for the pretreatment and depolymerization of sugars in biomass such as corn stover and switchgrass. This process operated at temperatures ranging from 150 to 190 °C and pressures of 150–450 bar, adjusting parameters such as temperature, CO₂ pressure, treatment time, and particle size to optimize the conversion efficiency. The principle behind this method lies in the unique physical properties of supercritical carbon dioxide, which allowed it to form a uniform solution with water. This solution penetrated the biomass fibers, disrupting their structure and facilitating the depolymerization of cellulose and hemicellulose. Compared to traditional sulfuric acid pretreatment, this approach reduces the required enzyme quantities and eliminates the need to neutralize the acidic medium post-pretreatment.

Furthermore, the dissolution of carbon dioxide enabled in situ pH adjustment, which could optimize the conditions for enzymatic hydrolysis and eliminate the need for additional pH adjustment steps. Experimental results demonstrate that under optimal conditions, this supercritical carbon dioxide pretreatment and enzymatic saccharification process significantly reduces the amount of enzyme required,

achieving a remarkable 33 % reduction in Depol 692 L enzyme usage compared to dilute sulfuric acid pretreatment, as can be seen in Fig. 5 [88]. Additionally, it exhibits promising potential in enhancing sugar yields from specific biomass substrates.

Yamagishi et al. [89] explored the effectiveness of using carbonated water to remove calcium from Ca(OH)₂-treated rice straw. They found that a washing sequence of two water washes followed by two carbonated water washes was more effective, removing 92.1 % of the calcium and recovering 49 % as CaO. This method not only improved calcium removal but also enhanced sugar extraction during enzymatic saccharification, likely due to the lower achieved pH. Under an unpressurized CO₂ atmosphere, this washing sequence released 78.5 % of glucose and 90.0 % of xylose. Putt et al. [90] identified the potential of high-rate algal ponds to yield 59 tons of dry biomass per hectare annually, with a specific productivity of 20 g/m²/day. Traditional methods of introducing concentrated CO₂-air mixtures for algal growth are inefficient for gas transfer. An innovative approach using a carbonation column (CC) achieved an 83 % CO₂ transfer efficiency and established an air-to-pond mass transport coefficient of 0.0037 m/min enhancing algae production when used with CO₂-rich exhaust gas streams and raceways. The main

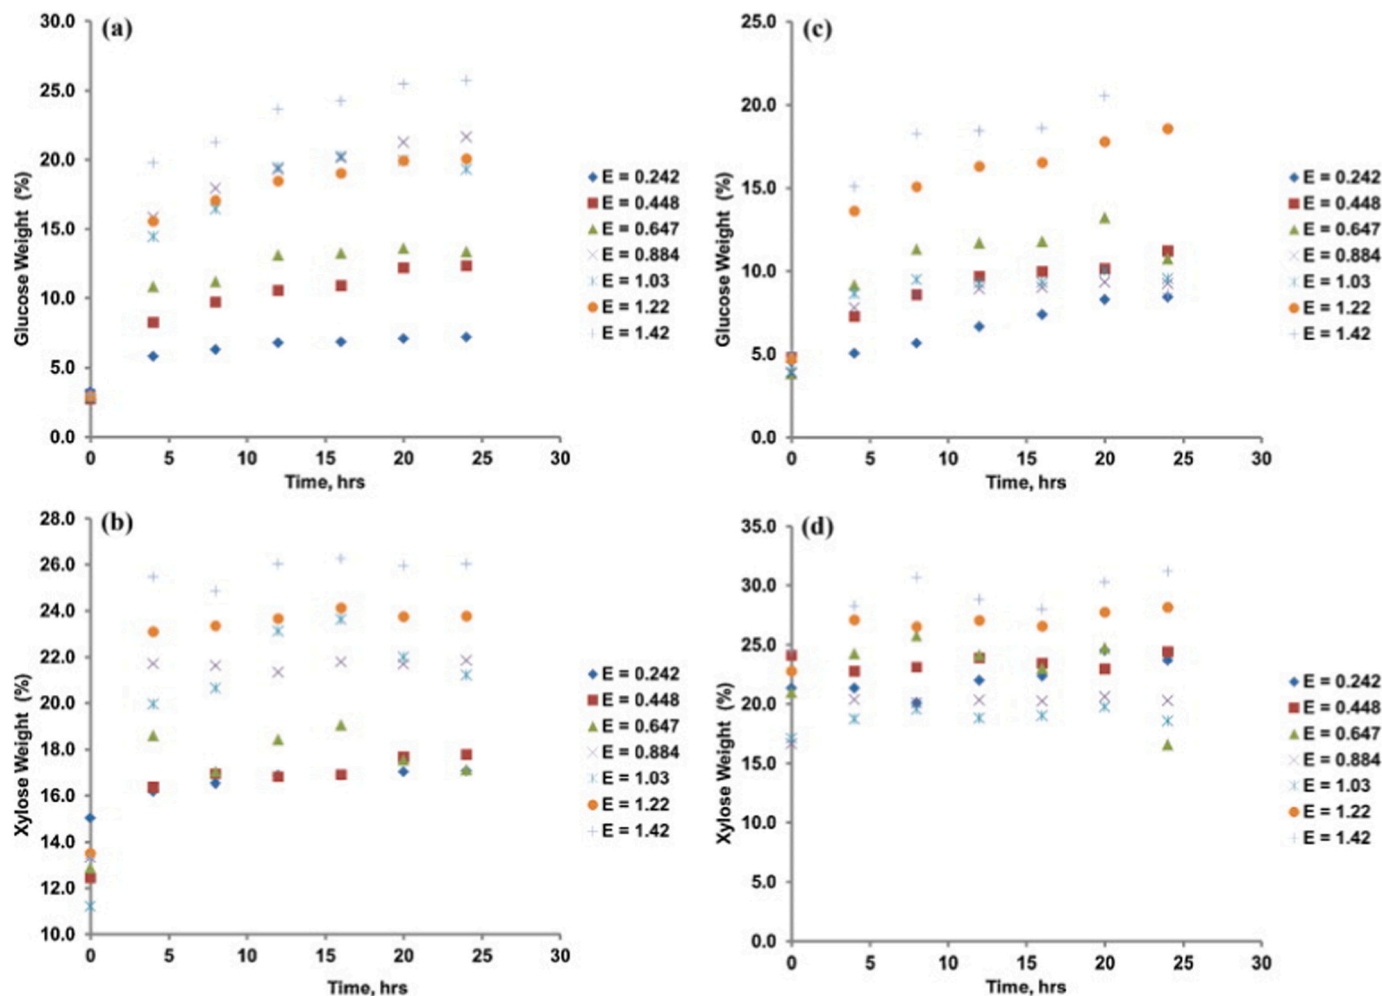


Fig. 5. The enzymatic hydrolysis of switchgrass hydrolysate pretreated with carbonated water (a, b) and dilute sulfuric acid (c, d) using Depol 692 L enzyme yielded glucose and xylose in weight percentages (E = enzyme loading in g-enzyme/g-biomass). Adapted with permission from King et al. Copyright 2012 Elsevier.

findings from this section are summarized in Table 4.

3.5. Green chemistry & renewable energy

Wang et al. [91] presented an innovative and sustainable approach to graphene manufacturing using carbonic acid-enabled electrochemical under-etching delamination. This process involves the electrochemical reduction of Cu₂O between the copper catalyst substrate and synthesized graphene. The process started with preparing a self-pressurized vessel containing the vertical mechanism for the gradual immersion and delamination of ethyl cellulose-coated graphene on copper foil into a carbonic acid solution. Ethyl cellulose (food-grade) was used as a thin film handle layer, replacing traditional polymers that rely on harsh solvents, thus improving the environmental sustainability of the process. The copper foil substrate served as the cathode and was biased at approximately 10 V in a two-terminal DC set-up, as illustrated in Fig. 6. This applied potential triggers the electrochemical reduction of Cu₂O to copper metal. The reduction occurred preferentially at the interface between the Cu₂O and the graphene, leading to the under-etching of the graphene layer from the copper.

The carbonic acid electrolyte was formed by dissolving carbon dioxide in deionized water and played a crucial role in maintaining the system's conductivity. The bicarbonate anions presented in the electrolyte facilitate the efficient electron transfer and uniform reduction of Cu₂O. This electrochemical delamination occurred gradually as the graphene-coated copper foil was immersed deeper into the carbonic acid solution. The outcome of this research is a residue-free and environmentally friendly method for transferring graphene, eliminating the need for harsh chemical etchants, and reducing water usage.

4. Agricultural use of carbonated water

In agriculture, carbonated water has shown the potential to enhance plant growth and crop yields. Enoch & Olesen [27] found that CO₂-enriched irrigation generally improved plant growth and increased yield, while Storlie & Heckman [28], however, observed variable effects of CO₂-rich water on different plant species. Despite these promising results, recent studies on this topic are limited. This emphasizes the need for ongoing research and reanalysis of historical findings to uncover new insights into using carbonated water in agriculture.

4.1. Plant irrigation with CO₂-enriched water

Enoch & Olsen's study on plant irrigation with CO₂-enriched water found more plant growth compared to normal water irrigation. This enhancement was attributed to improved nutrient uptake, pH changes aiding nutrient absorption, enhanced photosynthesis, and effects on plant hormones and pesticides [27]. Overall, their study highlighted the benefits of CO₂-enriched water for plant growth and food production. Despite the historical significance of such research, dating back to Mitscherlich's report [92], it had often been overlooked in later studies, making Enoch & Olesen's work important for revisiting the varying effects of CO₂-enriched water on plant growth and associated mechanisms [93].

Since the mid-19th century, researchers have studied plant carbon

absorption. Early experiments [28] found that oat plants initially suffered from CO₂-enriched water but eventually thrived, sparking debates on root or leaf absorption. Later studies [94–97] suggested minimal root absorption. Mitscherlich's research [92] saw no yield improvement, suggesting excessive soil CO₂ limits impact. Subsequent studies [92,98,99] found elevated root zone CO₂ hinders growth. Livingston & Beall [100] confirmed atmospheric CO₂ assimilation, with the exception of Stylites Andicola, which primarily absorbed through roots.

4.2. CO₂-enriched water mechanisms

Enoch & Olesen's experiments indicated a 2.9 % increase in plant yield with CO₂-enriched water in the tests [27]. CO₂-enriched water irrigation could alter soil-air composition, influenced by irrigation methods and timing. Controlled environments with constant CO₂ additions exhibit more pronounced changes [101]. Additionally, CO₂ dissolving in irrigation water raised air CO₂ levels in enclosed spaces like greenhouses, briefly benefiting plant growth, with outcomes dependent on greenhouse size, air exchange, and irrigation area [102–117]. Initially, CO₂ in irrigation water boosts nutrient availability in soil reactions, but prolonged exposure may lead to nutrient leaching and deficiencies, with effects varying based on plant, soil, and pH. Mycorrhiza in the soil also affects phosphorus nutrition [118–122]. Root-based CO₂ absorption for photosynthesis is generally minor, contributing less than 5 % and often less than 1 % of the total CO₂. Enoch & Olesen further observed that most CO₂ for photosynthesis came from the air, around 95–99 % [27]. Moreover, CO₂ potentially acts as a plant hormone, influencing root growth, tuberization, and hormonal regulation by modulating hormone levels, root development, and seed germination via interactions with ethylene, auxins, and cytokinins [102]. Lastly, pesticide and CO₂ interactions can affect soil nitrification and nitrogen availability. Under optimal CO₂ and recommended pesticide levels, nitrification remains unaffected. However, under CO₂ stress, pesticides inhibit NH₄-oxidation, and high pesticide concentrations reduce nitrogen production, making CO₂-enriched water less suitable for plant growth [118,123–125].

4.3. CO₂-enriched water for plant productivity

Carbonation affects soil conditions, enriches air with CO₂, and influences growth-promoting hormones and enzymes [28]. Storlie & Heckerman [28] emphasized the need for specific conditions to optimize plant growth with carbonated water. They examined optimal conditions for plant growth with carbonated irrigation water, highlighting the role of elevated pH for nutrient uptake. Drip irrigation and polyethylene mulch can boost CO₂ levels, especially useful in arid regions. However, the studies show inconsistent results, with some crops benefiting, especially when used with polyethylene mulch, while others show no significant gains. Thus, further research is essential for a comprehensive understanding of carbonated water's effects on plant productivity.

Khan et al. [29] enhanced Amaranth green (*Amaranthus viridis*) growth using CO₂-enriched micro-nano bubble (MNB) technology, with promising results for vegetable cultivation in regions such as China, Southeast Asia, and India. Three groups were studied over eight weeks: G1 (MNB + CO₂ water), G2 (MNB + air water), and G3 (simple water,

Table 4
Main findings of application of carbonated water in the biofuels field.

Category		Key Findings	Reference
Biofuel Production	Biomass conversion	High-pressure carbonated water process for breaking down materials like corn stover and switchgrass, yielding less sugar initially but requiring fewer enzymes for further breakdown compared to sulfuric acid treatment.	[88]
Calcium Removal	Enhancing sugar extraction	Carbonated water effectively removes calcium from rice straw treated with Ca(OH) ₂ , improving sugar extraction and recovery as CaO.	[89]
Algal Growth	CO ₂ utilization	High-rate algal ponds with carbonation columns (CC) show high CO ₂ transfer efficiency, improving algal productivity for biofuel production.	[90]

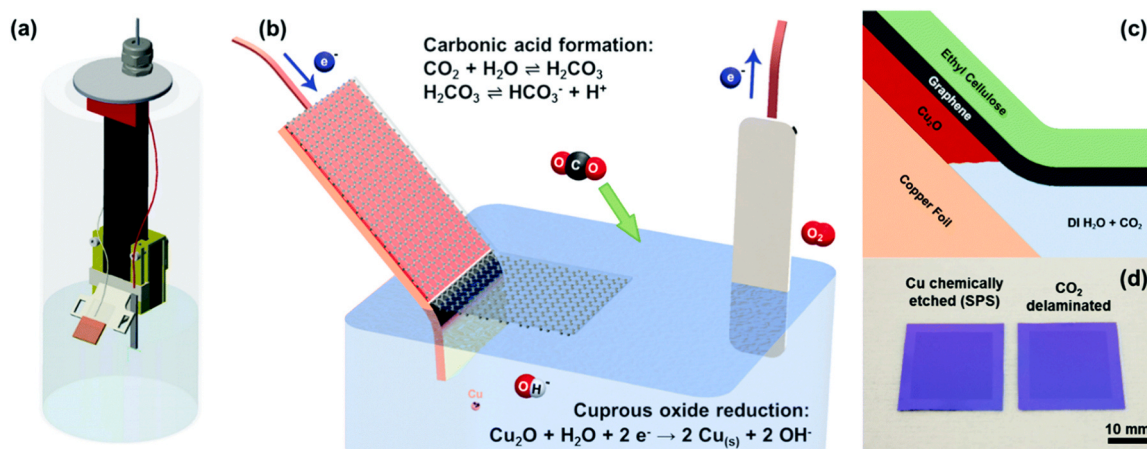


Fig. 6. (a) A self-pressurized vessel containing the necessary vertical setup was depicted. This setup facilitates the gradual immersion and delamination process in (b), where an ethyl cellulose-coated graphene layer on copper foil was submerged into the carbonic acid solution. This bias allowed for (c) the under-etching of the Cu₂O interlayer that exists between the graphene and the copper foil. Notably, (d) this setup enabled the transfer of inch-scale graphene without the need for chemical etchants and without the requirement for subsequent rinsing in deionized water. Adapted with permission from Wang et al. Copyright 2017. Royal Society of Chemistry.

controlled group). The study concluded that G1 had a more promising effect on nutrient content and growth levels than G2, including height, leaf size, root development, and various plant chemical parameters. Amino acids, α -amylase enzyme activity, vitamin C, soluble sugars, nitrogen, protein, and chlorophyll levels all showed positive effects. However, potential risks, such as excessive soil CO₂, can harm plants and soil health, as observed by He et al. [126]. This highlights the need for caution and sustainable practices when exploring using CO₂-enriched water in agriculture. We summarized the main findings of carbonated water in the agricultural section in Table 5.

5. Other uses of carbonated water

In this section, we explored other applications of carbonated water, focusing on its effectiveness in cleaning, its potential as a paint solvent,

Table 5
The application of carbonated water in the agricultural section.

Category	Key Findings	Reference	
Agricultural Use	Plant growth enhancement	CO ₂ -enriched irrigation generally improves plant growth and yield, with 2–9 % greater plant growth compared to normal water. CO ₂ -enriched water alters soil conditions, enriches air with CO ₂ , and influences growth-promoting hormones and enzymes; results show variable effects on different crops.	[27]
	Soil conditions	CO ₂ could act as a plant hormone affecting root growth, tuberization, and hormonal regulation.	[28]
	CO ₂ as a plant hormone	Interaction between CO ₂ and pesticides can affect soil nitrification and nitrogen availability.	[102–117]
	CO ₂ -pesticide interaction	CO ₂ -enriched micro-nano bubble water enhances Amaranth growth, affecting various chemical parameters and nutrient uptake.	[118, 123–125]
	Micro-Nano bubble technology		[29]

its positive role in extinguishers, and its contribution to culinary innovation.

5.1. Cleaning

Moreno et al.'s research [93] focused on addressing fouling issues in reverse electrodialysis (RED) stacks, a critical component in generating renewable energy from salinity gradients. Fouling, which leads to decreased power output and increased energy consumption, was a significant concern. The study explored using CO₂-saturated water as a cleaning method to tackle fouling issues in these RED stacks. During the experimental process, CO₂-saturated water was periodically injected into the RED stacks which simulated the real-world fouling conditions. The injection of this carbonated solution triggered a nucleation effect that led to the formation of tiny bubbles that effectively disrupted and removed fouling deposits, as can be seen in Fig. 7A. Simultaneously, the solution lowered the pH level of the feed water, further enhancing the cleaning effect. The findings indicate that using CO₂-saturated water allowed the RED stacks to maintain an average net power density of 0.18 W/m² under challenging fouling conditions, even at low temperatures. In contrast, using air sparging resulted in a significantly lower net power density of 0.04 W/m². The electrochemical impedance spectroscopy measurements reveal that air sparging increased stack resistance due to stagnant bubbles left inside the system after each cleaning cycle. The study shows the different impacts of various injection media on stack ohmic resistance and highlights operational and maintenance measures to optimize stack performance. For instance, injecting water/CO₂ (saturated) temporarily increases the stack ohmic resistance, but this increase is transient as CO₂ bubbles do not get trapped within the stack. In contrast, air bubbles in stacks with air sparging tend to remain and cause a permanent increase in ohmic resistance and, therefore, a reduction in the efficiency of the stack, as described in Fig. 7B.

In another research regarding carbonated water for cleaning, Abubakar et al. [127] investigated the cleaning efficiency of carbonated water compared to distilled water, emphasizing the significance of dust mitigation on surfaces, especially in the context of efficient energy devices. They proposed an economical self-cleaning approach inspired by nature, employing water droplets. The study focused on bubble formation and dust distribution within carbonated and distilled water droplets on hydrophobic surfaces. It was observed that carbonated water, containing dissolved compounds, generates more bubbles, leading to a 1.5–2.5 times greater concentration of dust particles than distilled

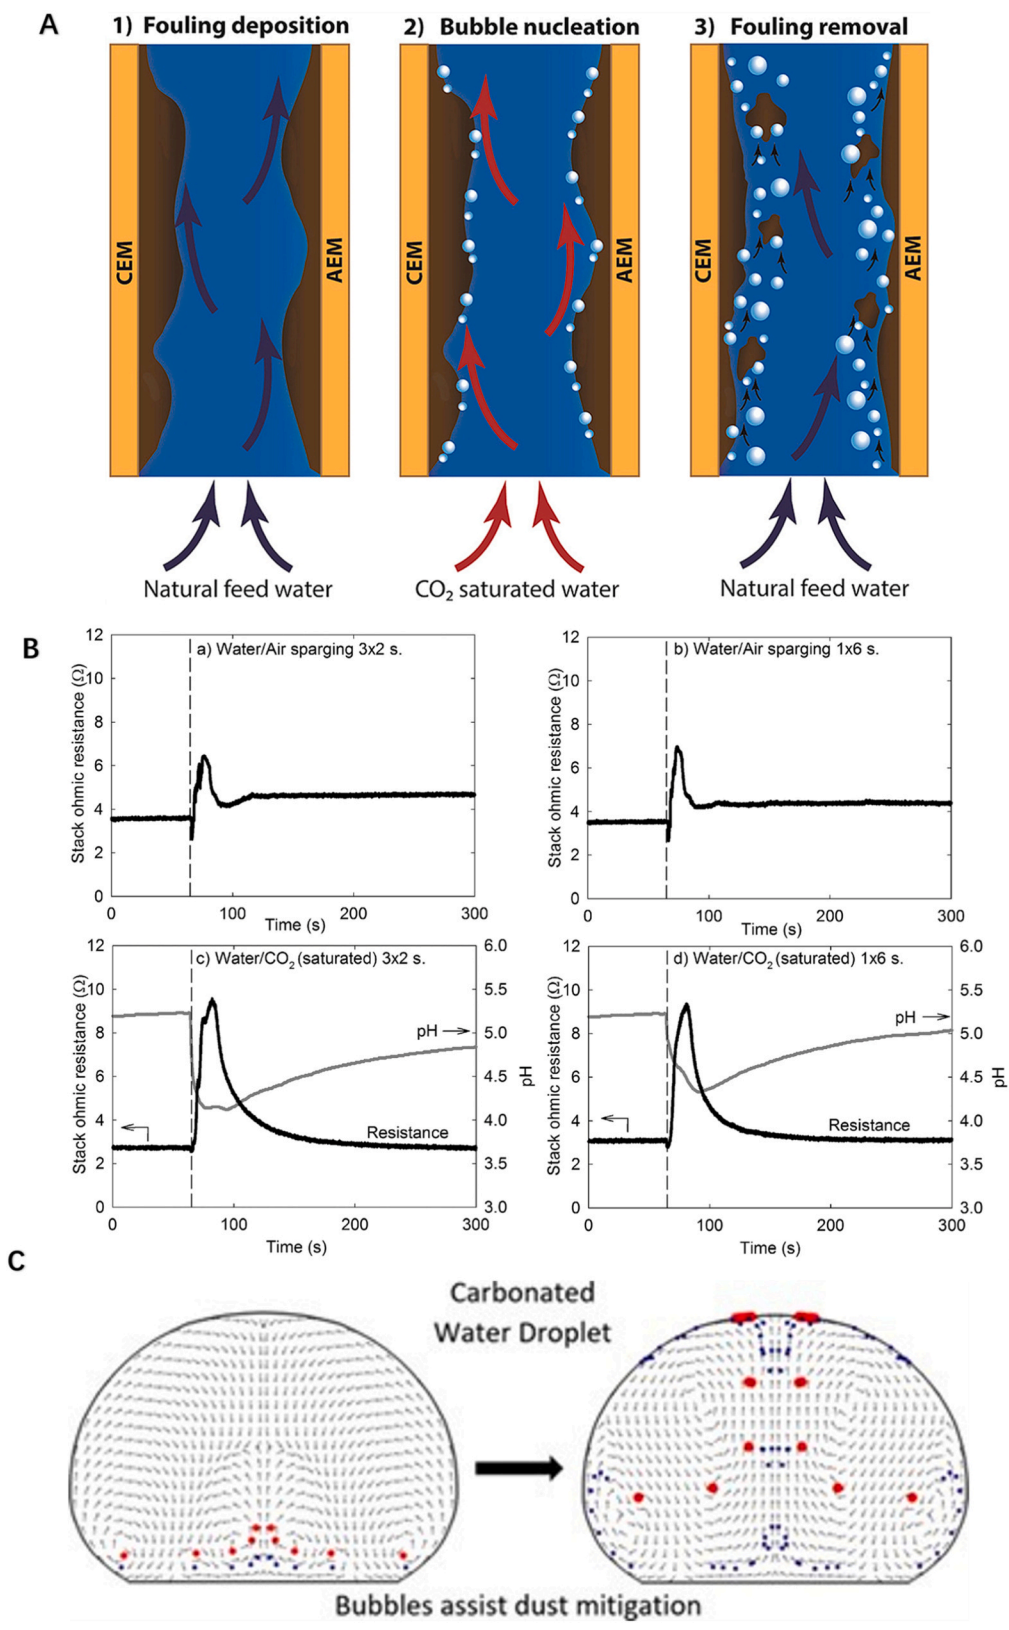


Fig. 7. (A) The RED stacks were periodically injected with CO₂-saturated water to simulate real-world fouling conditions. This injection of carbonated solution induced a bubble nucleation effect. These bubbles effectively disrupted and removed the fouling deposits, thereby improving the performance of the RED stacks. (B) The variation of stack ohmic resistance over time for different injection scenarios. In scenario a), water/air sparging injection was performed for a duration of 3 × 2 seconds, while in scenario b), the injection lasted for 1 × 6 s. Similarly, for scenarios c) and d), water/CO₂ (saturated) injection was applied, with durations of 3 × 2 s and 1 × 6 s, respectively. Both (A) and (B) were adapted from Moreno et al. Copyright 2017, Elsevier. (C) In a carbonated water droplet, dust can be mitigated by the CO₂ bubbles. Adapted with permission from Abubakar et al. Copyright 2022, American Chemical Society.

water. These bubbles played an important role in dust removal, enhancing the mobility of dust particles within the droplet and ultimately expediting the cleaning process.

Their further research [128] attributed the specific mechanisms underlying the enhanced cleaning performance of carbonated water. The effectiveness of carbonated water in removing dust from hydrophobic surfaces was attributed to the interaction between CO₂ bubbles and the flow structure within the droplets. This interaction accelerated the spread and infusion of carbonated water onto dust particles, resulting in superior dust removal compared to distilled water, as depicted in Fig. 7 C. Additionally, the presence of bubbles within the carbonated water droplets enhanced the overall efficiency of dust removal from the surface.

In a subsequent study by Abubakar et al. [129], the research examined CO₂ gas bubbles' behavior within carbonated water droplets, including their effects on spreading characteristics and rebounding ability. The study confirmed predictions related to droplet size and spreading speed through experimental data obtained via high-speed recording. It was found that CO₂ gas bubbles within the droplets undergo compression due to the total impact pressure of the droplets. This compression could lead to a slight reduction in bubble size. Under conditions of elevated pressure, smaller adjacent bubbles tend to merge, particularly toward the conclusion of the droplet's spreading and retraction phases. This increased pressure leads to a greater vertical height of the droplet, albeit with a slightly reduced contact diameter on the surface. The energy expended in compressing the CO₂ gas within the bubbles impacts the droplet's ability to rebound after the retraction phase.

In their study, Yilbas et al. [130] investigated the use of rolling liquid droplets for removing environmental dust from an inclined hydrophobic surface. They compared the movement of distilled and carbonated water droplets of varying volumes and the surface's inclination angle. The results highlighted a significant difference: carbonated water droplets moved notably faster on the dusty surface than distilled water. This enhanced motion was attributed to the formation of bubbles on the carbonated water droplets' surface, which reduced friction and enhanced speed. Additionally, the study explored the composition of environmental dust, revealing diverse components that could dissolve in water. Some components acted as sites for bubble formation within carbonated water droplets, further accelerating the dust's removal. The interaction between these bubbles and dust particles at the liquid-solid interface can greatly expedite dust removal. For smaller droplets (20 mL) and a low surface inclination angle ($d = 1^\circ$), both distilled and carbonated water droplets' rolling motion was observed to stop prematurely on the hydrophobic surface.

5.2. Solvent for paint

Ho et al. [131] discussed the issue of Volatile Organic Compound (VOC) emissions from solvent-based coatings and the desire to replace them with water-based coatings. However, traditional water-based coatings (latex) have limitations in hardness, durability, gloss, and cold-weather application due to the need for polymer particles to coalesce, which often leads to imperfections. The article proposed a solution using CO₂-responsive copolymers that can create a water-borne coating where the polymer fully dissolves before application and becomes water-resistant after application. These polymers dissolve in carbonated water but are insoluble in neutral water. The application of a carbonated polymer solution results in a clear, continuous, water-resistant coating without the need for particle coalescence, offering a VOC-free solution with improved coating quality.

5.3. Fire extinguishers

Recent developments in fire suppression technology have explored many innovative methods [132–135]. Kropotova et al. [132] assessed

fire extinguishing agents based on CO₂ and water, specifically for forest fuel combustion. Their research highlighted a trade-off where cycling spraying resulted in a slight increase in CO and CO₂ emissions but used significantly less water, thus reducing the overall environmental impacts. The study found that the composition of the liquid played an essential role in determining gas concentrations and overall efficiency, which varied notably. Lv et al. [133] took a different approach by enhancing the effectiveness of water mist for gasoline fire suppression by adding KBr, Tween-80, and dissolved CO₂. These additives proved instrumental in reducing flame height and enhancing the overall efficiency of the water mist. They discovered that there was an extensive improvement over pure water mist. Gaidukova et al. [134] explored using CO₂ hydrate in the form of granules and tablets for suppressing fires in solid materials. Their findings suggest that CO₂ hydrate is more effective than traditional methods such as water spray, snow, and ice, especially in complex fire scenarios such as multi-tier crib fires. They identified optimal ratios of CO₂ hydrate for containment and found a significant reduction in emissions and enhanced efficiency across a range of combustible materials. Based on the above reviews and findings, it is validated that carbonated water is effective in acting as a good solution for fire suppression, especially in tackling liquid and gas fires or fires in which the dry chemical fire extinguisher cannot reach. Because it could form a protective layer over flames by CO₂ to cut off the oxygen supply and rapidly cool the burning area with water [132]. Importantly, unlike many chemical fire suppressants [135], carbonated water does not leave harmful residues and has a lower CO₂ emission profile, which makes it a more environmentally friendly option. However, the method still requires further research and validation to fully understand its performances, limitations, and potential environmental impacts in diverse fire suppression scenarios.

5.4. Culinary practice

In culinary practice, carbonated water is gaining popularity in batter recipes, such as those for fish or tempura, due to its ability to create a light and crispy texture. The effervescence of carbonated water adds aeration to the batter, making it lighter and fluffier, resulting in enhanced crispiness when frying. This effect also ensured a more uniform coating on various foods [136]. Moreover, carbonated water imparts a pleasant tangy flavor and prevents excessive oil absorption

Table 6
Applications of carbonated water in other fields.

Category	Key Findings	Reference
Cleaning	Dust removal	Carbonated water enhances dust removal efficiency on hydrophobic surfaces by increasing bubble formation. [127–129]
		Carbonated water droplets move faster on dusty surfaces, reducing friction and enhancing speed in dust removal. [130]
Paint	VOC-free coating	Carbonated water used with CO ₂ -responsive copolymers creates a clear, water-resistant coating without VOC emissions. [131]
Fire Fighting	Fire extinguishers	Form a protective layer over flames by CO ₂ to cut off the oxygen supply and rapidly cool the burning area with water; less environmental impact than other chemical fire suppressants. [132–135]
Culinary Practice	Batter texture and flavor	Carbonated water adds aeration to the batter, resulting in a lighter, crispier texture and a pleasant tangy flavor while reducing oil absorption during frying. [136]

during frying, enhancing both texture and flavor for an improved dining experience. Table 6 contains the main findings of this section.

6. Conclusion and outlook

In this paper, we reviewed the advantages of applying Carbonated Water Injection (CWI) for Enhanced Oil Recovery (EOR) and CO₂ sequestration [137]. Although CO₂ is commonly used in gaseous form in industry, its application as carbonated water is less prevalent due to cost and infrastructure requirements [138,139]. Future research could explore CWI's potential in diverse oil field scenarios and reservoir types, including carbonate rocks, shale oil fields, and offshore sites [140]. Additionally, exploring the effects of new surfactants and nanomaterials on CWI efficiency is crucial [16]. Understanding how different CO₂ concentrations impact fluid dynamics and oil-water interfacial tension (IFT) is essential for optimizing CWI, despite its advantages in reducing surfactant use [141].

Advancements in computational simulations offer deeper insights into multiphase flow dynamics in CO₂ and water mixing. The increasing use of artificial intelligence and machine learning could further optimize CWI [142]. The integration of the Internet of Things (IoT) and sensor technology allows for real-time data collection and analysis in oil fields, enabling machine learning algorithms to predict optimal water injection parameters and maximize output [143,144]. While CWI adjusts injection strategies in oil fields using CO₂ for recovery, environmental claims need validation. Challenges include ensuring the safe use of material, complying with green chemistry standards, ecosystem monitoring, etc.

Addressing practical issues such as wastewater treatment and managing minerals, organics, metals [145–147] to meet discharge standards involves technical challenges and costs [146,148]. Potential groundwater and soil contamination, along with ecological disruptions and increased greenhouse gas emissions, highlight the need for comprehensive environmental monitoring [149,150]. Additionally, the use of carbonated water should promote efficient resource cycling and waste reduction [151]. Techniques such as LCA [152,153] and TEA [154,155] could provide further insights into these aspects.

We also reviewed the diverse applications of carbonated water in sectors such as healthcare and medical, construction materials, biofuel production, green chemistry, and domestic uses. In addition, integrating carbonated water utilization into agriculture shows an advantage for offsetting carbon emissions and promoting sustainable farming practices. However, further research and cost reductions are essential to ensure their economic viability and sustainability across various applications. Therefore, this review also aims to inspire innovation in carbonated water production and distribution, encouraging the adoption of sustainable practices in industry, agriculture, and domestic sectors.

CRedit authorship contribution statement

Stefano Cucurachi: Conceptualization, Writing – review & editing. **Yasmina Dimitrova:** Writing – original draft. **Justin Z. Lian:** Writing – original draft. **Indraneel Sen:** Conceptualization, Writing – review & editing. **Matteo Fasano:** Writing – review & editing.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Data availability

No data was used for the research described in the article.

References

- [1] G. Rothenberg, A realistic look at CO₂ emissions, climate change and the role of sustainable chemistry, *Sustain. Chem. Clim. Action* 2 (2023) 100012, <https://doi.org/10.1016/j.scca.2023.100012>.
- [2] Z.-L. Li, C.-C. Mu, X. Chen, X.-Y. Wang, W.-W. Dong, L. Jia, M. Mu, I. Streletskaia, V. Grebenets, S. Sokratov, A. Kizyakov, X.-D. Wu, Changes in net ecosystem exchange of CO₂ in Arctic and their relationships with climate change during 2002–2017, *Adv. Clim. Change Res.* 12 (2021) 475–481, <https://doi.org/10.1016/j.accre.2021.06.004>.
- [3] X.-F. Shen, Y.-P. Xu, X.-Q. Tong, Q. Huang, S. Zhang, J. Gong, F.-F. Chu, R. J. Zeng, The mechanism of carbon source utilization by microalgae when co-cultivated with photosynthetic bacteria, *Bioresour. Technol.* 365 (2022) 128152, <https://doi.org/10.1016/j.biortech.2022.128152>.
- [4] Y. Pei, Y. Wang, X. Shen, J. Wang, X. Sun, Q. Yuan, Synergistic utilization of carbon sources for efficient biosynthesis of N-acetylglucosamine, *Green Chem. Eng.* 4 (2023) 233–238, <https://doi.org/10.1016/j.gce.2022.04.001>.
- [5] G. Oliva, M.G. Galang, A. Buonerba, S.W. Hasan, V. Belgiojorno, V. Naddeo, T. Zarra, Carbon capture and utilization in waste to energy approach by leading-edge algal photo-bioreactors: The influence of the illumination wavelength, *Case Stud. Chem. Environ. Eng.* 7 (2023) 100348, <https://doi.org/10.1016/j.csee.2023.100348>.
- [6] H. McLaughlin, A.A. Littlefield, M. Menefee, A. Kinzer, T. Hull, B.K. Sovacool, M. D. Bazilian, J. Kim, S. Griffiths, Carbon capture utilization and storage in review: Sociotechnical implications for a carbon reliant world, *Renew. Sustain. Energy Rev.* 177 (2023) 113215, <https://doi.org/10.1016/j.rser.2023.113215>.
- [7] G.G. Esquivel-Patiño, F. Nápoles-Rivera, A. Jiménez-Gutiérrez, Thermal integration of a natural gas combined cycle power plant with carbon capture and utilization technologies, *Energy Convers. Manag.* 295 (2023) 117619, <https://doi.org/10.1016/j.enconman.2023.117619>.
- [8] D. Suescum-Morales, J.M. Fernández-Rodríguez, J.R. Jiménez, Use of carbonated water to improve the mechanical properties and reduce the carbon footprint of cement-based materials with recycled aggregates, *J. CO₂ Util.* 57 (2022) 101886, <https://doi.org/10.1016/j.jcou.2022.101886>.
- [9] M. Seyyedi, P. Mahzari, M. Sohrabi, A comparative study of oil compositional variations during CO₂ and carbonated water injection scenarios for EOR, *J. Pet. Sci. Eng.* 164 (2018) 685–695, <https://doi.org/10.1016/j.petrol.2018.01.029>.
- [10] P. Mahzari, A.P. Jones, E.H. Oelkers, An integrated evaluation of enhanced oil recovery and geochemical processes for carbonated water injection in carbonate rocks, *J. Pet. Sci. Eng.* 181 (2019) 106188, <https://doi.org/10.1016/j.petrol.2019.106188>.
- [11] P. Mahzari, P. Tsois, M. Sohrabi, S. Enezi, A.A. Yousef, A.A. Eidan, Carbonated water injection under reservoir conditions; in-situ WAG-type EOR, *Fuel* 217 (2018) 285–296, <https://doi.org/10.1016/j.fuel.2017.12.096>.
- [12] D. Suescum-Morales, J.R. Jiménez, J.M. Fernández-Rodríguez, Use of carbonated water as kneading in mortars made with recycled aggregates, *Materials* 15 (2022) 4876, <https://doi.org/10.3390/ma15144876>.
- [13] M. zeinali Hasanvand, M.A. Ahmadi, S.R. Shadizadeh, R. Behbahani, F. Feysi, Geological storage of carbon dioxide by injection of carbonated water in an Iranian oil reservoir: a case study, *J. Pet. Sci. Eng.* 111 (2013) 170–177, <https://doi.org/10.1016/j.petrol.2013.09.008>.
- [14] K.R. Chaturvedi, T. Sharma, Carbonated polymeric nanofluids for enhanced oil recovery from sandstone reservoir, *J. Pet. Sci. Eng.* 194 (2020) 107499, <https://doi.org/10.1016/j.petrol.2020.107499>.
- [15] S. Wu, Z. Li, Z. Wang, H.K. Sarma, C. Zhang, M. Wu, Investigation of CO₂/N₂ injection in tight oil reservoirs with confinement effect, *Energy Sci. Eng.* 8 (2020) 1194–1208, <https://doi.org/10.1002/ese3.578>.
- [16] H. Yu, Z. Rui, Z. Chen, X. Lu, Z. Yang, J. Liu, X. Qu, S. Patil, K. Ling, J. Lu, Feasibility study of improved unconventional reservoir performance with carbonated water and surfactant, *Energy* 182 (2019) 135–147, <https://doi.org/10.1016/j.energy.2019.06.024>.
- [17] C. Esene, S. Zendejboudi, A. Aborig, H. Shiri, A modeling strategy to investigate carbonated water injection for EOR and CO₂ sequestration, *Fuel* 252 (2019) 710–721, <https://doi.org/10.1016/j.fuel.2019.04.058>.
- [18] B. Jia, Carbonated water injection (CWI) for improved oil recovery and carbon storage in high-salinity carbonate reservoir, *J. Taiwan Inst. Chem. Eng.* 104 (2019) 82–93, <https://doi.org/10.1016/j.jtice.2019.08.014>.
- [19] A. Nagano, K. Maeda, A. Shimizu, K. Murotani, N. Mori, Effects of carbonation on swallowing: systematic review and meta-analysis, *Laryngoscope* 132 (2022) 1924–1933, <https://doi.org/10.1002/lary.30019>.
- [20] H.K. Lee, D. Jung, Y.-C. Heo, Y. Lee, Feasibility study on carbonated water for Doppler imaging in medical ultrasonic applications, *Opt. (Stuttg.)* 222 (2020) 165480, <https://doi.org/10.1016/j.jjleo.2020.165480>.
- [21] N. Vyas, Q.X. Wang, A.D. Walmsley, Improved biofilm removal using cavitation from a dental ultrasonic scaler vibrating in carbonated water, *Ultrason Sonochem.* 70 (2021) 105338, <https://doi.org/10.1016/j.ultsonch.2020.105338>.
- [22] S. Ogoh, T. Washio, K. Suzuki, K. Ikeda, T. Hori, N.D. Olesen, Y. Muraoka, Effect of leg immersion in mild warm carbonated water on skin and muscle blood flow, *Physiol. Rep.* 6 (2018) e13859, <https://doi.org/10.14814/phy2.13859>.
- [23] S. Ogoh, R. Nagaoka, T. Mizuno, S. Kimura, Y. Shidahara, T. Ishii, M. Kudoh, E. Iwamoto, Acute vascular effects of carbonated warm water lower leg immersion in healthy young adults, *Physiol. Rep.* 4 (2016) e13046, <https://doi.org/10.14814/phy2.13046>.
- [24] N. Nishimura, J. Sugeno, T. Matsumoto, M. Kato, H. Sakakibara, T. Nishiyama, Y. Inukai, T. Okagawa, A. Ogata, Effects of repeated carbon dioxide-rich water

- bathing on core temperature, cutaneous blood flow and thermal sensation, *Eur. J. Appl. Physiol.* 87 (2002) 337–342, <https://doi.org/10.1007/s00421-002-0626-0>.
- [25] N. Fujii, Y. Kataoka, Y.-F. Lai, N. Shirai, H. Hashimoto, T. Nishiyasu, Ingestion of carbonated water increases middle cerebral artery blood velocity and improves mood states in resting humans exposed to ambient heat stress, *Physiol. Behav.* 255 (2022) 113942, <https://doi.org/10.1016/j.physbeh.2022.113942>.
- [26] L.W.M. van der Sluis, M.P.J.M. Vogels, B. Verhaagen, R. Macedo, P.R. Wesselink, Study on the influence of refreshment/activation cycles and irrigants on mechanical cleaning efficiency during ultrasonic activation of the irrigant, *J. Endod.* 36 (2010) 737–740, <https://doi.org/10.1016/j.joen.2009.12.004>.
- [27] H.Z. Enoch, J.M. Olesen, Plant response to irrigation with water enriched with carbon dioxide, *New Phytol.* 125 (1993) 249–258, <https://doi.org/10.1111/j.1469-8137.1993.tb03880.x>.
- [28] C.A. Storlie, J.R. Heckman, Bell pepper yield response to carbonated irrigation water ¹, *J. Plant Nutr.* 19 (1996) 1477–1484, <https://doi.org/10.1080/01904169609365213>.
- [29] P. Khan, H. Wang, W. Gao, F. Huang, N.A. Khan, N. Shakoor, Effects of micro-nano bubble with CO2 treated water on the growth of Amaranth green (*Amaranthus viridis*), *Environ. Sci. Pollut. Res.* 29 (2022) 72033–72044, <https://doi.org/10.1007/s11356-022-20896-6>.
- [30] A. Talebi, A. Hasan-Zadeh, Y. Kazemzadeh, M. Riazi, A review on the application of carbonated water injection for EOR purposes: Opportunities and challenges, *J. Pet. Sci. Eng.* 214 (2022) 110481, <https://doi.org/10.1016/j.petrol.2022.110481>.
- [31] A. Golkari, M. Riazi, Comparative study of oil spreading characteristics for water and carbonated water systems using live and dead oils, *J. Pet. Sci. Eng.* 171 (2018) 242–252, <https://doi.org/10.1016/j.petrol.2018.07.034>.
- [32] I. Nowrouzi, A.K. Manshad, A.H. Mohammadi, Effects of dissolved carbon dioxide and ions in water on the dynamic interfacial tension of water and oil in the process of carbonated smart water injection into oil reservoirs, *Fuel* 243 (2019) 569–578, <https://doi.org/10.1016/j.fuel.2019.01.069>.
- [33] N. Mosavat, F. Torabi, Micro-optical analysis of carbonated water injection in irregular and heterogeneous pore geometry, *Fuel* 175 (2016) 191–201, <https://doi.org/10.1016/j.fuel.2016.02.039>.
- [34] N.I. Kechut, M. Jamiolahmady, M. Sohrabi, Numerical simulation of experimental carbonated water injection (CWI) for improved oil recovery and CO2 storage, *J. Pet. Sci. Eng.* 77 (2011) 111–120, <https://doi.org/10.1016/j.petrol.2011.02.012>.
- [35] A.H. Alizadeh, M. Khishvand, M.A. Ioannidis, M. Piri, Multi-scale experimental study of carbonated water injection: an effective process for mobilization and recovery of trapped oil, *Fuel* 132 (2014) 219–235, <https://doi.org/10.1016/j.fuel.2014.04.080>.
- [36] T. Jamshidi, F. Zeng, P. Tontiwachwuthikul, F. Torabi, Viability of carbonated water injection (CWI) as a means of secondary oil recovery in heavy oil systems in presence and absence of wormholes: Microfluidic experiments, *Fuel* 249 (2019) 286–293, <https://doi.org/10.1016/j.fuel.2019.03.093>.
- [37] J. Foroozesh, M. Jamiolahmady, M. Sohrabi, Mathematical modeling of carbonated water injection for EOR and CO2 storage with a focus on mass transfer kinetics, *Fuel* 174 (2016) 325–332, <https://doi.org/10.1016/j.fuel.2016.02.009>.
- [38] S. Mahdavi, L.A. James, Micro and macro analysis of carbonated water injection (CWI) in homogeneous and heterogeneous porous media, *Fuel* 257 (2019) 115916, <https://doi.org/10.1016/j.fuel.2019.115916>.
- [39] ScienceDirect, ScienceDirect, Elsevier (2024). (<https://www.sciencedirect.com/>) (Accessed 6 March 2024).
- [40] Web of Science, SCIE Science Citation Index Abstracts database, Web of Science (2024). (<https://www.webofknowledge.com>) (Accessed 6 March 2024).
- [41] Elsevier, Scopus, Elsevier (2024). (<https://www.elsevier.com/products/scopus>) (Accessed 6 March 2024).
- [42] Google Scholar, Google Scholar, Google (2024). (<https://scholar.google.com/>) (Accessed 6 March 2024).
- [43] ResearchGate, ResearchGate, ResearchGate (2024). (<https://www.researchgate.net/>) (Accessed 6 March 2024).
- [44] L. Shamsseer, D. Moher, M. Clarke, D. Ghersi, A. Liberati, M. Petticrew, P. Shekelle, L.A. Stewart, Preferred reporting items for systematic review and meta-analysis protocols (PRISMA-P) 2015: elaboration and explanation, *g7647*, *BMJ* 349 (2015) g7647, <https://doi.org/10.1136/bmj.g7647>.
- [45] D. Moher, L. Shamsseer, M. Clarke, D. Ghersi, A. Liberati, M. Petticrew, P. Shekelle, L.A. Stewart, Preferred reporting items for systematic review and meta-analysis protocols (PRISMA-P) 2015 statement, *Syst. Rev.* 4 (2015) 1, <https://doi.org/10.1186/2046-4053-4-1>.
- [46] M. Shakiba, S. Ayatollahi, M. Riazi, Investigation of oil recovery and CO2 storage during secondary and tertiary injection of carbonated water in an Iranian carbonate oil reservoir, *J. Pet. Sci. Eng.* 137 (2016) 134–143, <https://doi.org/10.1016/j.petrol.2015.11.020>.
- [47] J. Foroozesh, M. Jamiolahmady, The physics of CO2 transfer during carbonated water injection into oil reservoirs: from non-equilibrium core-scale physics to field-scale implication, *J. Pet. Sci. Eng.* 166 (2018) 798–805, <https://doi.org/10.1016/j.petrol.2018.03.089>.
- [48] V.K. Kudapa, K.A. Suriya Krishna, Heavy oil recovery using gas injection methods and its challenges and opportunities, *Mater. Today Proc.* (2023), <https://doi.org/10.1016/j.matpr.2023.05.091>.
- [49] R. Azin, A. Izadpanahi, A. Ranjbar, *Challenges of Gas Injection*, 2022, pp. 397–413, [10.1007/978-3-030-77200-9](https://doi.org/10.1007/978-3-030-77200-9).
- [50] D. Du, Y. Shen, W. Lv, C. Li, N. Jia, X. Song, X. Wang, Y. Li, Laboratory study on oil recovery characteristics of carbonated water huff-n-puff process in tight cores under reservoir condition, *Arab. J. Chem.* 14 (2021) 103192, <https://doi.org/10.1016/j.arabjc.2021.103192>.
- [51] C. Esene, S. Zendejboudi, H. Shiri, A. Aborig, Systematic sensitivity analysis to performance of carbonated water injection based on computational dynamic modeling, *Fuel* 274 (2020) 117318, <https://doi.org/10.1016/j.fuel.2020.117318>.
- [52] A.H. Alizadeh, M. Khishvand, M.A. Ioannidis, M. Piri, Multi-scale experimental study of carbonated water injection: an effective process for mobilization and recovery of trapped oil, *Fuel* 132 (2014) 219–235, <https://doi.org/10.1016/j.fuel.2014.04.080>.
- [53] M. Riazi, M. Sohrabi, M. Jamiolahmady, Experimental study of pore-scale mechanisms of carbonated water injection, *Transp. Porous Media* 86 (2011) 73–86, <https://doi.org/10.1007/s11242-010-9606-8>.
- [54] M. Salehpour, M. Riazi, M.R. Malayeri, M. Seyyedi, CO2-saturated brine injection into heavy oil carbonate reservoirs: Investigation of enhanced oil recovery and carbon storage, *J. Pet. Sci. Eng.* 195 (2020) 107663, <https://doi.org/10.1016/j.petrol.2020.107663>.
- [55] M. Shakiba, M. Riazi, S. Ayatollahi, M. Takband, The impact of connate water saturation and salinity on oil recovery and CO2 storage capacity during carbonated water injection in carbonate rock, *Chin. J. Chem. Eng.* 27 (2019) 1699–1707, <https://doi.org/10.1016/j.cjche.2018.09.008>.
- [56] N. Mosavat, F. Torabi, Experimental evaluation of the performance of carbonated water injection (CWI) under various operating conditions in light oil systems, *Fuel* 123 (2014) 274–284, <https://doi.org/10.1016/j.fuel.2014.01.077>.
- [57] M.A. Ahmadi, M. zeinali Hasanvand, S.S. Behbahani, A. Nourmohammadi, A. Vahidi, M. Amiri, G. Ahmadi, Effect of operational parameters on the performance of carbonated water injection: Experimental and numerical modeling study, *J. Supercrit. Fluids* 107 (2016) 542–548, <https://doi.org/10.1016/j.supflu.2015.07.012>.
- [58] C. Esene, S. Zendejboudi, H. Shiri, A. Aborig, Deterministic tools to predict recovery performance of carbonated water injection, *J. Mol. Liq.* 301 (2020) 111911, <https://doi.org/10.1016/j.molliq.2019.111911>.
- [59] A.K. Manshad, I. Nowrouzi, A.H. Mohammadi, Effects of water soluble ions on wettability alteration and contact angle in smart and carbonated smart water injection process in oil reservoirs, *J. Mol. Liq.* 244 (2017) 440–452, <https://doi.org/10.1016/j.molliq.2017.09.011>.
- [60] A. Khaksar Manshad, M. Olad, S.A. Taghipour, I. Nowrouzi, A.H. Mohammadi, Effects of water soluble ions on interfacial tension (IFT) between oil and brine in smart and carbonated smart water injection process in oil reservoirs, *J. Mol. Liq.* 223 (2016) 987–993, <https://doi.org/10.1016/j.molliq.2016.08.089>.
- [61] I. Nowrouzi, A.K. Manshad, A.H. Mohammadi, Effects of ions and dissolved carbon dioxide in brine on wettability alteration, contact angle and oil production in smart water and carbonated smart water injection processes in carbonate oil reservoirs, *Fuel* 235 (2019) 1039–1051, <https://doi.org/10.1016/j.fuel.2018.08.067>.
- [62] G. Shu, M. Dong, S. Chen, P. Luo, Improvement of CO2 EOR performance in water-wet reservoirs by adding active carbonated water, *J. Pet. Sci. Eng.* 121 (2014) 142–148, <https://doi.org/10.1016/j.petrol.2014.07.001>.
- [63] X. Chen, A. Paprouski, M. Elveny, D. Podoprigrora, G. Korobov, A laboratory approach to enhance oil recovery factor in a low permeable reservoir by active carbonated water injection, *Energy Rep.* 7 (2021) 3149–3155, <https://doi.org/10.1016/j.egy.2021.05.043>.
- [64] J. Foroozesh, M. Jamiolahmady, Simulation of carbonated water injection coreflood experiments: an insight into the wettability effect, *Fuel* 184 (2016) 581–589, <https://doi.org/10.1016/j.fuel.2016.07.051>.
- [65] M. Lashkarbolooki, M. Riazi, S. Ayatollahi, Experimental investigation of dynamic swelling and Bond number of crude oil during carbonated water flooding; effect of temperature and pressure, *Fuel* 214 (2018) 135–143, <https://doi.org/10.1016/j.fuel.2017.11.003>.
- [66] M. Lashkarbolooki, M. Riazi, S. Ayatollahi, Effect of CO2 and crude oil type on the dynamic interfacial tension of crude oil/carbonated water at different operational conditions, *J. Pet. Sci. Eng.* 170 (2018) 576–581, <https://doi.org/10.1016/j.petrol.2018.07.002>.
- [67] M. Seyyedi, P. Mahzari, M. Sohrabi, An integrated study of the dominant mechanism leading to improved oil recovery by carbonated water injection, *J. Ind. Eng. Chem.* 45 (2017) 22–32, <https://doi.org/10.1016/j.jiec.2016.08.027>.
- [68] M. Fasano, M. Morciano, L. Bergamasco, E. Chiavazzo, M. Zampato, S. Carminati, P. Asinari, Deep-sea reverse osmosis desalination for energy efficient low salinity enhanced oil recovery, *Appl. Energy* 304 (2021) 117661, <https://doi.org/10.1016/j.apenergy.2021.117661>.
- [69] A. Rahimi, M. Safari, B. Honarvar, H. Chabook, R. Gholami, On time dependency of interfacial tension through low salinity carbonated water injection, *Fuel* 280 (2020) 118492, <https://doi.org/10.1016/j.fuel.2020.118492>.
- [70] Y. Du, Y. Guo, M. Dou, F. Yang, I. Husein, I. Pustokhina, Experimental investigation of carbonated water injection incorporated with optimum concentration of chemical agents in ultra-low permeable reservoirs, *Energy Rep.* 7 (2021) 3607–3613, <https://doi.org/10.1016/j.egy.2021.06.009>.
- [71] M. Shakiba, S. Ayatollahi, M. Riazi, Activating solution gas drive as an extra oil production mechanism after carbonated water injection, *Chin. J. Chem. Eng.* 28 (2020) 2938–2945, <https://doi.org/10.1016/j.cjche.2020.07.026>.
- [72] M. Riazi, A. Golkari, The influence of spreading coefficient on carbonated water alternating gas injection in a heavy crude oil, *Fuel* 178 (2016) 1–9, <https://doi.org/10.1016/j.fuel.2016.03.021>.
- [73] M.H. Alqam, S.A. Abu-Khamsin, S.F. Alafnan, A.S. Sultan, A. Al-Majed, T. Okasha, The impact of carbonated water on wettability: combined experimental and

- molecular simulation approach, SPE J. 27 (2022) 945–957, <https://doi.org/10.2118/208594-PA>.
- [74] D.P. Erdosy, M.B. Wenny, J. Cho, C. DelRe, M.V. Walter, F. Jiménez-Ángeles, B. Qiao, R. Sanchez, Y. Peng, B.D. Polizzotti, M.O. de la Cruz, J.A. Mason, Microporous water with high gas solubilities, *Nature* 608 (2022) 712–718, <https://doi.org/10.1038/s41586-022-05029-w>.
- [75] I. Nowrouzi, A.K. Manshad, A.H. Mohammadi, Effects of TiO₂, MgO, and γ-Al₂O₃ nano-particles in carbonated water on water-oil interfacial tension (IFT) reduction in chemical enhanced oil recovery (CEOR) process, *J. Mol. Liq.* 292 (2019) 111348, <https://doi.org/10.1016/j.molliq.2019.111348>.
- [76] X. Sun, H. Ning, Y. Shi, G. Yu, Z. Jia, M. Han, Y. Zhang, Study of CO₂ solubility enhancement by nanomaterials in carbonated water: Implications for enhanced oil recovery and CO₂ storage, *J. Clean. Prod.* 396 (2023) 136562, <https://doi.org/10.1016/j.jclepro.2023.136562>.
- [77] M. Motie, M. Assareh, CO₂ sequestration using carbonated water injection in depleted naturally fractured reservoirs: a simulation study, *Int. J. Greenh. Gas. Control* 93 (2020) 102893, <https://doi.org/10.1016/j.ijggc.2019.102893>.
- [78] M. Morishita, J. Sota, M. Kobayashi, Effects of carbonated beverages on sustained swallowing behavior changes in older inpatients, *Physiol. Behav.* 265 (2023) 114172, <https://doi.org/10.1016/j.physbeh.2023.114172>.
- [79] T. Haraguchi, T. Emoto, T. Hirayama, Y. Imai, M. Kato, T. Hirano, Peak-frequency histogram similarity of bowel sounds for the evaluation of intestinal conditions, *Appl. Sci.* 13 (2023) 1405, <https://doi.org/10.3390/app13031405>.
- [80] S. Senekowitsch, C. Foja, T. Wildgrube, P. Schick, C. Rosenbaum, J. Krause, F. Brokmann, M.-L. Kromrey, S. Engeli, W. Weitschies, M. Grimm, Intragastric carbon dioxide release prolongs the gastric residence time of postprandially administered caffeine, *Pharmaceutics* 15 (2023) 1012, <https://doi.org/10.3390/pharmaceutics15031012>.
- [81] J. Van Den Abeele, J. Brouwers, E. Deloosse, J. Tack, P. Augustijns, The effect of sparkling water on intraluminal formulation behavior and systemic drug performance, *J. Pharm. Sci.* 106 (2017) 2472–2482, <https://doi.org/10.1016/j.xphs.2017.03.039>.
- [82] B. Hens, M. Bermejo, P. Augustijns, R. Cristofaletti, G. Amidon, Application of the gastrointestinal simulator (GIS) coupled with in silico modeling to measure the impact of Coca-Cola® on the luminal and systemic behavior of loratadine (BCS Class 2b), *Pharmaceutics* 12 (2020) 566, <https://doi.org/10.3390/pharmaceutics12060566>.
- [83] P.M. Dafiiah, N. Swapna, Variations in the amplitude and duration of hyolaryngeal elevation during swallow: effect of sour and carbonated liquid bolus, *Physiol. Behav.* 224 (2020) 113028, <https://doi.org/10.1016/j.physbeh.2020.113028>.
- [84] S. Kubota, Y. Endo, M. Kubota, H. Miyazaki, T. Shigemasa, The pressor response to the drinking of cold water and cold carbonated water in healthy younger and older adults, *Front Neurol.* 12 (2022), <https://doi.org/10.3389/fneur.2021.788954>.
- [85] S. Barker, R. Moss, M.B. McSweeney, Carbonated emotions: Consumers' sensory perception and emotional response to carbonated and still fruit juices, *Food Res. Int.* 147 (2021) 110534, <https://doi.org/10.1016/j.foodres.2021.110534>.
- [86] H. Ryu, Y. Kim, S. Heo, S. Kim, Effect of carbonated water manufactured by a soda carbonator on etched or sealed enamel, *Korean J. Orthod.* 48 (2018) 48, <https://doi.org/10.4041/kjod.2018.48.1.48>.
- [87] R. Cuomo, G. Sarnelli, M.F. Savarese, M. Buycxk, Carbonated beverages and gastrointestinal system: between myth and reality, *Nutr., Metab. Cardiovasc. Dis.* 19 (2009) 683–689, <https://doi.org/10.1016/j.numecd.2009.03.020>.
- [88] J.W. King, K. Srinivas, O. Guevara, Y.-W. Lu, D. Zhang, Y.-J. Wang, Reactive high pressure carbonated water pretreatment prior to enzymatic saccharification of biomass substrates, *J. Supercrit. Fluids* 66 (2012) 221–231, <https://doi.org/10.1016/j.supflu.2012.02.010>.
- [89] K. Yamagishi, M. Ike, D. Guan, K. Tokuyasu, Washing lime-pretreated rice straw with carbonated water facilitates calcium removal and sugar recovery in subsequent enzymatic saccharification, *J. Appl. Glycosci.* 66 (1999) (2019) 11–19, <https://doi.org/10.5458/jag.jag.JAG-2018.0003>.
- [90] R. Putt, M. Singh, S. Chinnasamy, K.C. Das, An efficient system for carbonation of high-rate algae pond water to enhance CO₂ mass transfer, *Bioresour. Technol.* 102 (2011) 3240–3245, <https://doi.org/10.1016/j.biortech.2010.11.029>.
- [91] M.C. Wang, W.P. Moestopo, S. Takekuma, S.F. Barna, R.T. Haasch, S. Nam, A sustainable approach to large area transfer of graphene and recycling of the copper substrate, *J. Mater. Chem. C Mater.* 5 (2017) 11226–11232, <https://doi.org/10.1039/C7TC02487H>.
- [92] Mitscherlich E., Ein Beitrag zur Kohlensäureindigen, *Landwirtschaftliches Jahrbuch*, 1910.
- [93] J. Moreno, N. de Hart, M. Saakes, K. Nijmeijer, CO₂ saturated water as two-phase flow for fouling control in reverse electro dialysis, *Water Res* 125 (2017) 23–31, <https://doi.org/10.1016/j.watres.2017.08.015>.
- [94] Sachs J., Vorlesungen über Pflanzen-physiologie, 1882.
- [95] Pfeffer W., Pflanzenphysiologie, 1881.
- [96] Vines S.H., The influence of light upon the growth of leaves., 1882.
- [97] Moll J.W., Ueber den Ursprung des Kohlenstoffs der Pflanzen. *Landwirtschaftliches Jahrbuch*, 1877.
- [98] H.A. Noyes, The effect on plant growth of saturating a soil with carbon dioxide, *Science* 40 (1914) (1979) 792–796.
- [99] E. Free, The effect of aeration on the growth of buckwheat in water? *Cultures Johns Hopkins Univ Circ*, 1917.
- [100] B.R. Livingston BE, The soil as direct source of carbon dioxide for ordinary plants, *Plant Physiol.* 9 (1934) 237–259.
- [101] L.B. Birner H., *Wasserkulturversuche mit Hafer in der Agrikultur-chemischen Versuchsstation zu Regennald. Landwirtschaftliche Versuchs Station*, 1866.
- [102] H.Z. Enoch, Crop responses to aerial carbon dioxide, *Acta Hort.* 268 (1990) 17–32.
- [103] W.F. Zimmermann PW, *Contributions of the Boyce Thompson Institute*, 1935.
- [104] F.B. Abeles, *Ethylene and plant development, -roduction* (1985).
- [105] B.S. Chadwick AV, , Regulation of root growth by auxin-ethylene interaction, *Plant Physiol.* (1970) 192–200.
- [106] Jackson M.B., *Ethylene and the responses of plants to excess water in their environment. A review*, 1985.
- [107] D.R. Paterson, *Effect of CO₂ enriched external atmosphere on tuberization and growth of potato*, *J. Am. Soc. Hortic. Sci.* 100 (1975) 798–801.
- [108] S.O. Palmer, CE, Cytokinins and tuber initiation in the potato (*Solanum tuberosum* L.), *Nature* 221 (1969) 279–280.
- [109] A.M. N.F.S.OE. Mingo-Castel, *Effect of carbon dioxide and ethylene on tuberization of isolated potato stolons cultured in vitro*, *Plant Physiol.* 53 (1974) 798–801.
- [110] G.W. Miller, *Carbon dioxide-bicarbonate absorption, accumulation, effects of various plant metabolic reactions, and possible relations to lime-induced chlorosis*, *Soil Sci.* 89 (1960) 241–245.
- [111] M.J. Lin, WC, Carbonated mist and high intensity supplementary lighting for propagation of selected woody ornamentals, *Int. Plant Propagators' Soc. Com. - Bined Proc.* 30 (1980) 10A109.
- [112] Krizek D.T., *Carbon dioxide enrichment, in: Proceedings Cotton Producers Research Conference, Phoenix*, 1979; pp. 283–290.
- [113] P.B.S.O. Arteca RN, *Changes in carbon fixation, tuberization, and growth induced by CO₂ application to the root zone of potato plants*, *Science* 205 (1979) 1279–1280.
- [114] O.U.A.M.K.A.S.S. Esashi Y, *CO₂ enhanced C₂₄ production in tissues of imbibed cocklebur seeds*, *Aust. J. Plant Physiol.* 13 (1986) 17–429.
- [115] B.E. Burg, SP, *Molecular requirements for the biological activity of ethylene*, *Plant Physiol.* 42 (1967) 144–152.
- [116] G. Geisler, *Morphogenetic influence of (CO₂ + HC0₃) on roots*, *Plant Physiol.* 38 (1963) 77–80.
- [117] G. Geisler, *Interactive effects of CO₂ and O₂ in soil on root and top growth of barley and peas*, *Plant Physiol.* 42 (1967) 305–307.
- [118] F.E. Clark, *The growth of bacteria in soil*, *Ecol. Soil Bact.* (1968) 451–457.
- [119] W.G. Buyanovsky GA, *Annual cycles of carbon dioxide level in soil air*, *Sci. Soc. Am. J.* 47 (1983) 1139–1145.
- [120] M. Alexander, *Nitrification*, *Am. Soc. Agron.* (1965) 307–343.
- [121] E.H. Lowe RH, *Carbon dioxide requirement for growth and legume nodule bacteria*, *Soil, Sci.* 94 (1962) 351–356.
- [122] L.F. Rettger, *The influence of carbon dioxide on bacteria*, *J. Bacteriol.* 14 (1927) 101–127.
- [123] Saltzman S., *Combined application of liquid fertilizer and pesticides through an irrigation system*, *Bet Dagan*, 1989.
- [124] K.Y. Singh BR, *Interaction of CO₂ tension and salt concentration on mineral nitrogen release in an allophane soil*, *Soil Sci.* 114 (1972) 401–403.
- [125] S.S. Kinbursky RS, *CO₂-nitrification relationships in closed soil incubation vessels*, *Soil Biol. Biochem.* 22 (1990) 571–572.
- [126] W. He, G. Yoo, M. Moonis, Y. Kim, X. Chen, *Impact assessment of high soil CO₂ on plant growth and soil environment: a greenhouse study*, *PeerJ* 7 (2019) e6311, <https://doi.org/10.7717/peerj.6311>.
- [127] A.A. Abubakar, B.S. Yilbas, H. Al-Qahtani, G. Hassan, M. Yakubu, S.B. Hatab, *Carbonated water droplets on a dusty hydrophobic surface*, *Soft Matter* 16 (2020) 7144–7155, <https://doi.org/10.1039/D0SM00841A>.
- [128] A.A. Abubakar, B.S. Yilbas, H. Al-Qahtani, G. Hassan, *Carbonated water droplet can ease dust mitigation from hydrophobic surfaces*, *Langmuir* 36 (2020) 10504–10518, <https://doi.org/10.1021/acs.langmuir.0c01702>.
- [129] A.A. Abubakar, B.S. Yilbas, H. Al-Qahtani, *Impact characteristics of a carbonated water droplet on hydrophobic surface*, *J. Fluids Eng.* 144 (2022), <https://doi.org/10.1115/1.4051694>.
- [130] B.S. Yilbas, G. Hassan, H. Al-Qahtani, S. Bahatab, A.Z. Sahin, A. Al-Sharafi, A. A. Abubakar, *Dust removal from a hydrophobic surface by rolling fizzy water droplets*, *RSC Adv.* 10 (2020) 19811–19821, <https://doi.org/10.1039/D0RA003215H>.
- [131] J. Ho, B. Mudraboyina, C. Spence-Elder, R. Resendes, M.F. Cunningham, P. G. Jessop, *Water-borne coatings that share the mechanism of action of oil-based coatings*, *Green Chem.* 20 (2018) 1899–1905, <https://doi.org/10.1039/C8GC00130H>.
- [132] S. Kropotova, V. Dorokhov, A. Sviridenko, P. Strizhak, *Composition of the gas-air mixture in the containment and suppression of forest fires with promising extinguishing agents*, *Forests* 14 (2023) 786, <https://doi.org/10.3390/f14040786>.
- [133] D. Lv, W. Tan, G. Zhu, L. Liu, *Gasoline fire extinguishing by 0.7 MPa water mist with multicomponent additives driven by CO₂*, *Process Saf. Environ. Prot.* 129 (2019) 168–175, <https://doi.org/10.1016/j.psep.2019.07.002>.
- [134] O. Gaidukova, V. Morozov, R. Volkov, P. Strizhak, *Containment and suppression of class a fires using CO₂ hydrate*, *Fire* 6 (2023) 82, <https://doi.org/10.3390/fire6030082>.
- [135] Y. Zhou, R. Bu, X. Zhang, C. Fan, J. Gong, *Performance evaluation of water mist fire suppression: a clean and sustainable fire-fighting technique in mechanically-ventilated place*, *J. Clean. Prod.* 209 (2019) 1319–1331, <https://doi.org/10.1016/j.jclepro.2018.10.315>.
- [136] CooksInfo, *Soda water*, (2023). (<https://www.cooksinfo.com/soda-water>) (accessed November 7, 2023).

- [137] M. Sohrabi, M. Riazi, M. Jamiolahmady, N. Idah Kechut, S. Ireland, G. Robertson, Carbonated water injection (CWI)—a productive way of using CO₂ for oil recovery and CO₂ storage, *Energy Procedia* 4 (2011) 2192–2199, <https://doi.org/10.1016/j.egypro.2011.02.106>.
- [138] Z. Sakhaei, M. Salehpour, M. Riazi, Carbonated water injection, in: *Gas Injection Methods*, Elsevier, 2023, pp. 259–294, <https://doi.org/10.1016/B978-0-12-822302-4.00009-0>.
- [139] S. BACHU, CO₂ storage in geological media: role, means, status and barriers to deployment, *Prog. Energy Combust. Sci.* 34 (2008) 254–273, <https://doi.org/10.1016/j.pecs.2007.10.001>.
- [140] S. Mahdavi, L.A. James, High pressure and high-temperature study of CO₂ saturated-water injection for improving oil displacement; mechanistic and application study, *Fuel* 262 (2020) 116442, <https://doi.org/10.1016/j.fuel.2019.116442>.
- [141] M. Mansha, S. Ali, M. Alsakkaf, P.B. Karadkar, B.G. Harbi, Z.H. Yamani, S. A. Khan, Advancements in nanoparticle-based stabilization of CO₂ Foam: Current trends, challenges, and future prospects, *J. Mol. Liq.* 391 (2023) 123364, <https://doi.org/10.1016/j.molliq.2023.123364>.
- [142] Y. Cheraghi, S. Kord, V. Mashayekhizadeh, Application of machine learning techniques for selecting the most suitable enhanced oil recovery method; challenges and opportunities, *J. Pet. Sci. Eng.* 205 (2021) 108761, <https://doi.org/10.1016/j.petrol.2021.108761>.
- [143] Z. Huang, K. Li, C. Ke, H. Duan, M. Wang, S. Bing, An intelligent diagnosis method for oil-well pump leakage fault in oilfield production Internet of Things system based on convolutional attention residual learning, *Eng. Appl. Artif. Intell.* 126 (2023) 106829, <https://doi.org/10.1016/j.engappai.2023.106829>.
- [144] H. Vo Thanh, D. Sheini Dashtgoli, H. Zhang, B. Min, Machine-learning-based prediction of oil recovery factor for experimental CO₂-Foam chemical EOR: Implications for carbon utilization projects, *Energy* 278 (2023) 127860, <https://doi.org/10.1016/j.energy.2023.127860>.
- [145] F.H. Al-Ani, Q.F. Alsahly, R.S. Raheem, K.T. Rashid, A. Figoli, Experimental investigation of the effect of implanting TiO₂-NPs on PVC for long-term UF membrane performance to treat refinery wastewater, *Membranes (Basel)* 10 (2020) 77, <https://doi.org/10.3390/membranes10040077>.
- [146] A. Ali, U.T. Syed, T.S. Bak, C.A. Quist-Jensen, Membrane emulsification—a novel solution for treatment and reuse of produced water from oil field, *Membranes (Basel)* 12 (2022) 971, <https://doi.org/10.3390/membranes12100971>.
- [147] A. Ali, C. Quist-Jensen, F. Macedonio, E. Drioli, Application of membrane crystallization for minerals' recovery from produced water, *Membranes (Basel)* 5 (2015) 772–792, <https://doi.org/10.3390/membranes5040772>.
- [148] K. Rodman, A. Cervania, V. Budig-Markin, C. Schermesser, O. Rogers, J. Martinez, J. King, P. Hassett, J. Burns, M. Gonzales, A. Folkerts, P. Duin, A. Virgil, M. Aldrete, A. Lagasca, A. Infanzon-Marin, J. Aitchison, D. White, B. Boutros, S. Ortega, B. Davis, V. Tran, A. Achilli, Coastal California wastewater effluent as a resource for seawater desalination brine commingling, *Water (Basel)* 10 (2018) 322, <https://doi.org/10.3390/w10030322>.
- [149] A. Smeda, Z. Kraiem, A. Sdiri, B. Elleuch, M. Kallel, C. Sadik, An efficient integrative method for a sustainable environmental management of produced water: application on the Zelten oil field, sirte basin, Libya, *Kuwait J. Sci.* (2023), <https://doi.org/10.1016/j.kjs.2023.10.007>.
- [150] O. Sizov, A. Agoltsov, N. Rubtsova, Methodological issues of elaborating and implementing remote environmental monitoring of oil and gas exploration applying satellite images: the priobskoye oil field (Yugra, Russia), *Energy Procedia* 59 (2014) 51–58, <https://doi.org/10.1016/j.egypro.2014.10.348>.
- [151] N. Shehata, O.A. Mohamed, E.T. Sayed, M.A. Abdelkareem, A.G. Olabi, Geopolymer concrete as green building materials: Recent applications, sustainable development and circular economy potentials, *Sci. Total Environ.* 836 (2022) 155577, <https://doi.org/10.1016/j.scitotenv.2022.155577>.
- [152] M. Martín-Gamboa, D. Iribarren, D. García-Gusano, J. Dufour, A review of life-cycle approaches coupled with data envelopment analysis within multi-criteria decision analysis for sustainability assessment of energy systems, *J. Clean. Prod.* 150 (2017) 164–174, <https://doi.org/10.1016/j.jclepro.2017.03.017>.
- [153] M.P. Tsang, G.W. Sonnemann, D.M. Bassani, Life-cycle assessment of cradle-to-grave opportunities and environmental impacts of organic photovoltaic solar panels compared to conventional technologies, *Sol. Energy Mater. Sol. Cells* 156 (2016) 37–48, <https://doi.org/10.1016/j.solmat.2016.04.024>.
- [154] A. Levasseur, O. Bahn, D. Beloin-Saint-Pierre, M. Marinova, K. Vaillancourt, Assessing butanol from integrated forest biorefinery: a combined techno-economic and life cycle approach, *Appl. Energy* 198 (2017) 440–452, <https://doi.org/10.1016/j.apenergy.2017.04.040>.
- [155] C. Fernández-Dacosta, J.A. Posada, R. Kleerebezem, M.C. Cuellar, A. Ramirez, Microbial community-based polyhydroxyalkanoates (PHAs) production from wastewater: techno-economic analysis and ex-ante environmental assessment, *Bioreour. Technol.* 185 (2015) 368–377, <https://doi.org/10.1016/j.biortech.2015.03.025>.