

Building Archetypes Supporting the National Building Renovation Plan

Original

Building Archetypes Supporting the National Building Renovation Plan / Piro, M., Ballarini, I., Corrado, V.. - ELETTRONICO. - (2025), pp. 183-190. (Building Simulation Applications BSA 2024 - 6th IBPSA-Italy conference Bozen-Bolzano 26th – 28th June 2024) [10.13124/9788860462022_24].

Availability:

This version is available at: 11583/3000397 since: 2025-12-15T17:03:10Z

Publisher:

Bozen-Bolzano University Press

Published

DOI:10.13124/9788860462022_24

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

Konferenzbeiträge / Atti / Proceedings

Building Simulation Applications BSA 2024

6th IBPSA-Italy Conference
Bozen-Bolzano, 26th–28th June 2024

Edited by

**Giovanni Pernigotto, Ilaria Ballarini, Francesco Patuzzi,
Alessandro Prada, Vincenzo Corrado, Andrea Gasparella**

bu,press

bozen
bolzano
university
press

Scientific Committee / Senior members

Andrea Gasparella, Free University of Bozen-Bolzano, Italy
Ian Beausoleil-Morrison, Carleton University, Canada
Jan L.M. Hensen, Technische Universiteit Eindhoven, The Netherlands
Gregor P. Henze, University of Colorado Boulder, USA
Ardeshir Mahdavi, Technische Universität Graz, Austria
Athanasios Tzempelikos, Purdue University, USA
Reinhard Radermacher[†], University of Maryland, USA
Francesco Asdrubali, Università per Stranieri di Perugia, Italy
Paolo Baggio, Università degli Studi di Trento, Italy
Francesca Cappelletti, Università IUAV di Venezia, Italy
Maurizio Cellura, Università degli Studi di Palermo, Italy
Cristina Cornaro, Università degli Studi di Tor Vergata, Italy
Vincenzo Corrado, Politecnico di Torino, Italy
Livio Mazzarella, Politecnico di Milano, Italy
Adolfo Palombo, Università degli Studi di Napoli Federico II, Italy

Scientific Committee / Junior members

Matthias Schuss, Technische Universität Wien, Austria
Ulrich Pont, Technische Universität Wien, Austria
Alessia Arteconi, Università Politecnica delle Marche, Italy
Ilaria Ballarini, Politecnico di Torino, Italy
Annamaria Buonomano, Università degli Studi di Napoli Federico II, Italy
Marco Caniato, Free University of Bozen-Bolzano, Italy
Gianpiero Evola, Università degli Studi di Catania, Italy
Maria Ferrara, Politecnico di Torino, Italy
Federica Morandi, Free University of Bozen-Bolzano, Italy
Francesco Patuzzi, Free University of Bozen-Bolzano, Italy
Giovanni Pernigotto, Free University of Bozen-Bolzano, Italy
Anna Laura Pisello, Università degli Studi di Perugia, Italy
Alessandro Prada, Università degli Studi di Trento, Italy

Organizing Committee

Paolo Baggio, Università degli Studi di Trento, Italy
Marco Baratieri, Free University of Bozen-Bolzano, Italy
Marco Caniato, Free University of Bozen-Bolzano, Italy
Francesca Cappelletti, Università IUAV di Venezia, Italy
Vincenzo Corrado, Politecnico di Torino, Italy
Andrea Gasparella, Free University of Bozen-Bolzano, Italy
Norbert Klammsteiner, Energytech GmbH/Srl -Bozen, Italy
Federica Morandi, Free University of Bozen-Bolzano, Italy
Francesco Patuzzi, Free University of Bozen-Bolzano, Italy
Giovanni Pernigotto, Free University of Bozen-Bolzano, Italy
Ilaria Pittana, Università IUAV di Venezia, Italy
Alessandro Prada, Università degli Studi di Trento, Italy
Fabio Viero, Manens – Tifs, Italy

bu,press

Bozen-Bolzano University Press, 2025

Free University of Bozen-Bolzano

www.unibz.it/universitypress

Cover design: DOC.bz / bu,press

ISSN 2531-6702

ISBN 978-88-6046-202-2

DOI 10.13124/9788860462022



Except where otherwise noted, this work is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License.

Table of Contents

Preface	ix
Analytical Model (SAM 2.0): A New Frontier in Open-Source Building Energy Simulation <i>Michał Dengusiak, Jakub Ziolkowski, Michalina Dengusiak</i>	1
Synthetic Indices for Comfort Assessment: An Application to a Historical Building in Catania / Andrea Longhitano, Gianpiero Evola, Vincenzo Costanzo, Francesco Nocera	9
Data-Driven Digital Twinning of Ventilation Systems for Performance Optimization: A University Building Case Study <i>Andres Sebastian Cespedes Cubides, Jakob Bjørnskov, Muhyiddine Jradi</i>	17
Computational Cost Reduction of a Simulation-Based Optimization Process Through Machine Learning Methods: Neural Networks vs. Random Forest <i>Iuri Praça Verginio, Rafael de Paula Garcia, Mario Alves da Silva, Joyce Correia Carlo</i>	25
Normalization Method of Building's Actual Energy Consumption for Normalized Building Energy Benchmarking <i>Deuk-Woo Kim, Dong-Hyuk Yi, Cheol-Soo Park</i>	31
Simulator for Predicting Vertical Illuminance of Window With External Venetian Blind <i>Seon-Young Heo, Young-sub Kim, Seon-Jung Ra, Cheol-Soo Park</i>	39
Modelling Solar Disability Glare Reflected off Modern Building Facades <i>Matthew J. Glanville, Pallava R. Kodali, Mohammed Alsailani, Roberto P.M. Neto</i>	49
Energy Modelling and Calibration of a Controlled Environment Agriculture Space in a Cold Climate Using Building Performance Simulation Tools <i>Gilbert Larochelle Martin, Danielle Monfet</i>	57
Microclimate Conditions in the SS. Salvatore Church of Bologna <i>Haruna Saito, Massimiliano Manfren, Kristian Fabbri, Maria Cristina Tommasino, Lamberto Tronchin</i>	65
The Impact of Thermal Zone Resolution on the Energy Simulation Results of Complex Buildings <i>Christiane Berger, Ardeshir Mahdavi</i>	71
Development and Calibration of an Urban Building Energy Model for the City of Padua <i>Jacopo Vivian, Enrico Pratavera, Gianmarco Bano, Angelo Zarrella</i>	77
ClustEnergy OpTool: An Open Tool for Assessing the Energy Flexibility Provided by Clusters of Buildings <i>Patricia Ercoli, Alice Mugnini, Fabio Polonara, Alessia Arteconi</i>	85
The Role of Dynamic Primary Energy Factors (PEFs) in Building Performance Assessment: A Case Study <i>Matteo Bilardo, Riccardo Oldini, Enrico Fabrizio</i>	95
Modeling a Dew Point Indirect Evaporative Cooling System for TRNSYS Building Simulations: Proposal and Validation <i>Alessandra Urso, Gianpiero Evola, Francesco Nocera, Vincenzo Costanzo, Ana Tejero-Gonzales, Eloy Velasco-Gomez</i>	105
Acoustic Correction of the Regional Theatre of Bejaia (Algeria) <i>Feriel Saidane, Gino Iannace</i>	113
From Theatre to Cinema to Theatre Again: The Acoustic History of the Vittorio Emanuele II Theatre of Benevento Through Simulations <i>Gino Iannace, Antonella Bevilacqua, Umberto Berardi</i>	119
Economic and Environmental Optimization of Retrofitting Options for a Community Building. A Case Study from Förslöv-Grevie Parish, Sweden <i>Azadeh Hana Hassanzadeh, Sepideh Rabie, Marko Ljubas, Henrik Davidsson, Dennis Johansson</i>	125
Installation of Reflecting Panels in the Main Church of Aversa <i>Silvana Sukaj, Amelia Trematerra, Ilaria Lombardi, Giovanni Amadasi, Luigi Guerriero</i>	133

Building Information Modeling (BIM) and Building Energy Modeling (BEM): Interoperability and Interactive Data Representation for the Energy Management of the Existing Buildings <i>Ilaria Giannetti, Cristian Tolù, Giulia Scimia, Gianluigi Bovesecchi, Pier Paolo Valentini, Cristina Cornaro</i>	141
Modelling of Aquifer Thermal Energy Storage Connected to Hospital Buildings: A Case Study in Denmark <i>Mohammed Burhanuddin Rabani, Alessandro Maccarini, Michael Wetter, Alireza Afshari</i>	149
Analysis of Energy Consumption Scenarios of the Italian Residential Building Stock <i>Enrico Prativiera, Jacopo Vivian, Francesca Gaudino, Angelo Zarrella</i>	157
Automating Solar Shading Control in Residential Buildings Located in a Temperate Climate: A Household-Specific Decision <i>Lotte Van Thillo, Stijn Verbeke, Amaryllis Audenaert</i>	165
Simulating the Microclimate of a Pilot Greenhouse for the EU Project REGACE on Innovative Agri-Voltaic Technology <i>Cristina Cornaro, Marcello Petitta, Gianluigi Bovesecchi, Paolo Miraglia Fagiano, Catalin Voinea, Walter Fornari, Catherine Baxevanou, Dimitrios Fidaros, Chryssoula Papaioannou, Nikolaos Katsoulas</i>	175
Building Archetypes Supporting the National Building Renovation Plan <i>Matteo Piro, Ilaria Ballarini, Vincenzo Corrado</i>	183
Integration of Machine Learning-Based CIE Standard Skies Model With Daylight Simulation for Building Energy Performance Analysis <i>Emmanuel Imuetinyan Aghimien, Ernest Kin-wai Tsang, Danny Hin-wa Li, Zhenyu Wan</i>	191
A Design Assistant Tool for Optimised Building Energy Retrofit <i>Ilaria Di Blasio, Julius Emig, Dietmar Siegele, Dominik T. Matt</i>	199
A Simulation Study on the Performance of Machine Learning Daylight-Linked Lighting Control Under Urban Topography <i>Ernest Kin-wai Tsang, Emmanuel Imuetinyan Aghimien, Danny Hin-wa Li, Zhenyu Wang</i>	207
BIM2FEM: From Building Information Modelling to Finite Element Analysis – An Automated Open Source-Based Workflow <i>Julius Emig, Dietmar Siegele, Dominik T. Matt</i>	215
Hygrothermal Analysis of Most Common Historical Slabs in Hungary <i>Fanni Petreševics, Balázs Nagy</i>	223
Energy Flexibility Study of a Hotel Using TRNSYS <i>Michele Libralato, Giovanni Cortella, Paola D'Agaro</i>	233
The Impact of Classroom Acoustics on Student Well-Being and Noise Disturbance at the University of Pescara, Italy <i>Samantha Di Loreto, Alessandro Ricciutelli, Leonardo Guglielmi, Sergio Montelpare</i>	241
Environmental Quality Analysis in School Environment by Measurements and Numerical Methods <i>Leonardo Guglielmi, Samantha Di Loreto, Matteo Falone, Mariano Pierantozzi</i>	249
A Comparative Analysis of Simplified Calculation Procedures for Assessing the Energy Losses of Heating Emission Systems <i>Franz Bianco Mauthe Degerfeld, Ilaria Ballarini, Vincenzo Corrado</i>	257
Simplified and Fully Detailed Dynamic Building Energy Simulation Tools Compared to Monitored Data for a Single-Family NZEB House <i>Ana Paola Rocca Vera, Giovanni Cortella, Paola D'Agaro</i>	265
A Building Renovation Concept Based on a Low-Temperature Geothermal Loop With Decentralized Plug-And-Play Heat Pumps <i>Sara Bordignon, Jacopo Vivian, Agnese Tagliaferri, Davide Quaggiotto, Michele De Carli</i>	273
The Urban-Scaled EnergyPlus Simulation Using Korean GIS to Aid Development of Energy Normalization for Shading Effect <i>Dong-Hyuk Yi, Deuk-Woo Kim</i>	281
Thermal Comfort and Environmental Impact in the Heating System Refurbishment of a Victorian Hall With Infrared Ceiling Panels <i>Roberto Rugani, Marco Picco, Fabio Fantozzi</i>	289
Personal Comfort Systems (PCSs) in Offices: Efficient Utilization Threshold Based on Energy Consumption <i>Roberto Rugani, Marco Picco, Giacomo Salvadori, Fabio Fantozzi</i>	297

Integration of Rooftop Photovoltaics and Roof Retrofitting Strategies for Enhanced Energy Efficiency in Warm Climates <i>Krithika Panicker, Prashant Anand, Abraham George, Ardeshir Mahdavi</i>	305
Effects of an Indoor Living Wall on Room Lighting Conditions: Comparison Between Measured and Simulated Data <i>Matteo Ghellere, Alice Bellazzi, Anna Devitofrancesco, Benedetta Barozzi</i>	317
Mold Growth Affecting the Achievement of NZEB in the Long Term in Tropical Climates <i>Cristina Carpino, Miguel Chen Austin, Cihan Turhan, Dafni Mora, Natale Arcuri</i>	325
Mitigating Summer Overheating of a Primary School Building Based on Dynamic Simulations <i>Ágnes Marosi, Balázs Nagy</i>	333
Analysis of Energy Consumption of a Building Placed in Milan by Adopting Common Building Insulation Materials and Recycled Surgical Masks <i>Vincenzo Ballerini, Paolo Valdiserri, Manuela Neri, Jan Kašpar, Mariagrazia Pilotelli, Edoardo Piana, Eugenia Rossi di Schio</i>	343
Recommendations to Make Reinforcement Learning Practical in Building Control Applications <i>Sourav Dey, Gregor Henze</i>	353
Simulation-based optimization for Energy- and Cost-Efficient Refurbishment of an Educational Building <i>Levente Szatmári, Balázs Nagy</i>	361
Achieving a Deeper Understanding of User-Related Influences on Artificial Lighting Energy Demand Using High-Performance Computing <i>Sascha Hammes, Johannes Weninger, Philipp Gschwandtner, Philipp Zech</i>	371
Strategic Synergy: Enhancing Building Performance Through Advanced Simulation and Shading Integration <i>Shahryar Habibi, Giovanni Pernigotto, Andrea Gasparella</i>	379
Is Solar Hydrogen a Viable Solution for Energetically Self-Sustainable Off-Grid Buildings? <i>Stefania Perrella, Roberto Bruno, Piero Bevilacqua, Daniela Cirone</i>	389
Assessment of the Simultaneity Factor Between PV Production and Electric Demand in a Real Scholar Canteen Belonging to a REC Through TRNSYS Simulations <i>Daniela Cirone, Roberto Bruno, Piero Bevilacqua, Stefania Perrella, Natale Arcuri</i>	397
Exploitation of Energy Performance Certificate Database in Urban Energy Modelling <i>Sebastiano Anselmo, Maria Ferrara, Piero Boccardo, Stefano Paolo Corgnati</i>	407
TRNSYS Dynamic Simulation Model of a Typical Air-Handling Unit: Experimental Calibration and Validation Based on Field Operation Data in the South of Italy <i>Antonio Rosato, Rita Mercuri, Mohammad El Youssef, Francesco Romanucci, Mohamed G. Ghorab</i>	415
Examining the Influence of Climatological Parameters on Building Cluster Geometry and Design Features in a Rural Indian Context: The Case of Sugganahalli Village (India) <i>Jeswin Varghese, Andrea Magdalene Pais, Suchi Priyadarshani, Monto Mani</i>	425
Estimating Indoor TVOCs in Response to Varying Humidity Regimes in Vernacular and Conventional Dwellings <i>Shreyata Khurana, Monto Mani</i>	435
Examining Indoor Humidity Ratio in Response to Varying Window-To-Wall Ratio and Ventilation in Indian Climate Zones for Earth-Plaster Based Dwellings <i>Suchi Priyadarshani, Monto Mani</i>	445
Calibrated BEMs and LSTM Neural Networks for Indoor Temperature Prediction: A Comparative Analysis in Pre- and Post-Retrofit Scenarios <i>Gianluca Maracchini, Nicola Callegaro, Rossano Albatì</i>	453
Impact of Different Radiation Decomposition Models and ERA5 Dataset on Building Energy Simulation Results: A Case Study in Brazil <i>Matheus K. Bracht, Matheus S. Geraldi, Ana Paula Melo, Roberto Lamberts</i>	461
Effects of Different Wind Speed Databases on the Performance of a Vertical Axis Micro Wind Turbine Integrated With a Typical Residential House: A Comparative Simulation Analysis for Five Italian Cities / <i>Antonio Rosato, Achille Perrotta, Luigi Maffei</i>	469
The Challenge of Archetypes Representativity for Wide Scale Building Investigation in Italy <i>Laura Carnieletto, Lorenzo Teso, Wilmer Pasut, Angelo Zarrella</i>	479

Comparison between Real Energy Consumption, Italian APE and Dynamic Energy Simulation <i>Vincenzo Pennisi, Davide Varesano</i>	487
Simulation Tests for the Determination of the U-Value of Walls by Using Response Factors Theory with Noisy Boundary Conditions <i>Maja Danovska, Davide Cassol, Ivan Giongo, Alessandro Prada</i>	495
Calibrating a Clothing Insulation Model for Thermal Comfort Assessment in Educational Buildings <i>Ilaria Pittana, Federica Morandi, Andrea Gasparella, Athanasios Tzempelikos, Francesca Cappelletti</i>	503
Alternative Affordable Solutions in Reducing the Number of Hours with Heat Strain Inside Buildings <i>Atlas Ramezani, Marco Manzan</i>	511
An Attempt to Model Ventilation Rate in Classrooms Based on the Measurement of Relative Humidity <i>Federica Morandi, Alessandro Prada, Ilaria Pittana, Francesca Cappelletti, Andrea Gasparella</i>	519
Assessment and Mapping of the Urban Heat Island Effect: A Preliminary Analysis on the Impact on Urban Morphology for the City of Turin, Italy <i>Gregorio Borelli, Ilaria Ballarini, Vincenzo Corrado, Andrea Gasparella, Giovanni Pernigotto</i>	525
Analysis of Control Strategies for Energy Performance Optimization for Educational Buildings: Comparison of Two Kindergartens in the Municipality of Bolzano, Italy <i>Angelica El Hokayem, Giovanni Pernigotto, Andrea Gasparella</i>	533
Optimization of a Solar Assisted Heat Pump System to Increase Thermal Efficiency Working on the Cold Source <i>Piero Bevilacqua, Stefania Perrella, Roberto Bruno, Daniela Cirone, Dimitrios Kaliakatos</i>	541
Simulative Applications of Novel Indicators for the Characterization and Performance Evaluation of Transparent Facades <i>Riccardo Gazzin, Giuseppe De Michele, Stefano Avesani, Giovanni Pernigotto, Andrea Gasparella</i>	549
Predicting Daylight Preferences Using HDRI and Deep Learning <i>Dongjun Mah, Athanasios Tzempelikos</i>	557
An Investigation Into Thermal Bridging Effects in an Envelope Integrated With End-Of-Life Photovoltaic Panels <i>Roshan R. Rao, Monto Mani</i>	565
Modelling Actions at the Building Stock Level for Decision-Making Towards Carbon-Neutral Cities <i>Erminia Consiglio, Luca Ferraris, Mirella Iacono, Gaetano Noé, Maria Ferrara</i>	573
A New Evaluation Framework to Assess the Prosumer Efficiency in Thermal Source District Heating Networks <i>Alireza Etemad, James O'Donnell, Alessandro Maccarini, Alireza Afshari</i>	583
The Influence of Acoustic Stressors in Educational Environments for Autistic Individuals: Preliminary Investigations <i>Marco Caniato, Federica Bettarello, Arianna Marzi, Andrea Gasparella</i>	593
Machine Learning and Data Augmentation Techniques to Cope With Solar Data Scarcity to Simulate PV Generation in Mountain Environments <i>Aleksandr Gevorgian, Giovanni Pernigotto, Andrea Gasparella</i>	601
Building Performance Simulation From Research to Professional Practice <i>Lori McElroy, Andrea Gasparella</i>	609

Building Archetypes Supporting the National Building Renovation Plan

Matteo Piro – Politecnico di Torino, Italy – matteo.piro@polito.it

Ilaria Ballarini – Politecnico di Torino, Italy – ilaria.ballarini@polito.it

Vincenzo Corrado – Politecnico di Torino, Italy – vincenzo.corrado@polito.it

Abstract

The national building renovation plan is a key element in the recently approved version of the Energy Performance of Buildings Directive. The plan will provide a comprehensive overview of the energy and environmental performance of both the residential and non-residential building stock. To achieve the objective of mapping the energy *status* of urban configurations, the exploitation of building typologies, representative of different climatic zones, building use categories, and construction periods, has shown to be a useful approach.

The huge data uncertainty related to the building archetype generation necessitates a deeper analysis of the variation of crucial inputs that have repercussions on the energy performance assessment of the building stock.

This work begins with the Urban Building Energy Model data classification aimed at identifying the fundamental inputs needed to run an urban large-scale energy analysis. Then, the paper proceeds with the review and categorisation of the existing Italian databases, exploitable to mitigate the high uncertainty related to the input data. Once the requisite information is collected and the databases classified, the application part progresses with the probabilistic building archetype schema generation from the energy performance certificates of the Aosta Valley Region, taken as a case study. A local large-scale sensitivity analysis, obtained varying one at a time the thermo-physical parameters of the building fabric and the window-to-wall ratio of a residential stock located in Aosta, was carried out. The study highlights how variations in statistical ranges of inputs, particularly regarding the performance of opaque building envelope components, impact the assessment of building energy needs.

1. Introduction

1.1 Background Analysis

The implementation of the national building renovation plan (European Commission, 2024), to track the decarbonisation of the building stock, involves the development of Urban Building Energy Models (UBEMs). UBEM, a complex object using a bottom-up engineering model, aids urban planners, public administrations, energy agencies, and validation bodies to map the energy and environmental *status* of a block, a district, or a city. UBEMs require huge amount of information that is usually limited and lacks accuracy. The data restriction is influenced by privacy policies (Hosseini Haghighi et al., 2022; Johari et al., 2023) affecting the availability of building data at the city scale. Building energy consumptions are sensitive data, usually inaccessible for a portfolio of buildings. In large-scale energy models, a consequence of this issue is reported by Oraopoulos & Howard (2022), who pointed out that just 9 % of UBEMs are validated. On the other hand, the inaccuracy of data is attributable to the non-interoperability between databases, the absence of controls to enhance data quality, and the lack of standardised format and harmonised procedures to collect data between local, regional, and national informative systems (Chen et al., 2019).

To bridge the data uncertainty at large-scale energy analysis, the collected data flow into the generation of the building archetypes (BAs). However, according to Swan and Ugursal (2009), the utilisation of archetypes is a possible approach but not the only one used in UBEMs. The BA approach is a trade-off to reduce complexity and enhance the model's accuracy in energy analysis. BAs, prototypes (Car-

nieletto et al., 2021), or building typologies (Dascalaki et al., 2011) are sets of geometric, in UBEMs directly extracted from GIS, and non-geometric properties that represent the heterogeneity of the building stock characteristics. Although a harmonised and shared methodology to generate BAs does not exist (Borges et al., 2022), archotyping is generally composed of two steps, i.e., the segmentation and the characterisation of the building stock (Pasichnyi et al., 2019). The segmentation phase refers to the taxonomy of similar buildings based on different criteria, such as climatic zone, building use category, construction periods, etc. The characterisation process corresponds to defining representative parameters that generalise the performance of the building stock. This aspect influences the structure of the BA dataset since archetypes may include deterministic or probabilistic parameters. From this perspective, Cerezo et al. (2017) investigated and compared simulation results for four groups of BAs, creating two with deterministic and two with probabilistic metrics. To discover the impact of different input parameters, Perneti et al. (2021) applied different sensitivity analyses (SA) to rank the life cycle cost of eleven zero-energy buildings in Europe.

1.2 Aim of the Research

The data uncertainty for a single-building energy model grows significantly in large-scale energy analyses. The BA, which represents the mean characteristics of a building stock, helps mitigate this source of error. However, it is crucial to evaluate how variations in key inputs impact the overall energy performance of the building stock.

This work first explores UBEM data for large-scale analysis and then classifies sources to gather the required information. Next, considering a UBEM archetype-based approach, a local SA varying one relevant thermo-physical parameter at a time, included in the probabilistic BA schema, applied to a residential block located in the municipality of Aosta (Italy) was carried out. Using CitySim Pro (Robinson et al., 2009), this analysis emphasises the order of error in the building's energy need linked to the variability of significant input parameters within their confidence interval. It highlights the possi-

ble deviations in estimating energy needs of the building stock. The novelty of this study lies in addressing the high uncertainty levels in UBEM and identifying the information in the BA schema that requires greater accuracy.

2. Methods

The proposed methodology comprises: a) UBEM data classification, which provides a standardised overview of the required data to build a large-scale energy model, b) database cataloguing, including the listing and classification of recognised Italian local, regional, and national databases, c) definition of a probabilistic BA dataset (archotyping), and d) SA to assess the impact of relevant thermo-physical parameters in a non-validated UBEM scenario. The first three points of the proposed methodology fall into the “Urban Reference Buildings for Energy Modelling” (URBEM, 2024) project approach. The scope of URBEM—which is an Italian national research project financed under the PRIN 2020 Programme—is to create an Italian library of representative buildings to be used by UBEM tools.

2.1 UBEM Data Classification

UBEM is a bottom-up physical-based model (Reinhart & Cerezo Davila, 2016), aimed at determining the energy and environmental performance of the building stock.

The purpose of the simulation, the spatial and temporal granularity of data, and the calculation methodology integrated into the large-scale energy programs influence the UBEM input data needed. UBEM can be delineated into distinct layers: input data, mathematical model, and output data. The UBEM input data can be grouped into five different categories: geometrical information, properties of transparent and opaque building envelope components, occupancy data, technical building system characteristics, and climatic data. A detailed description about the simplifications and assumptions made in UBEM from the Building Energy Model (BEM) can be found in Piro et al. (2023).

However, the primary objective of the UBEM data classification is to distinctly identify basic and

common input data, enabling a comprehensive evaluation of the energy performance of building stocks, regardless of the simulation tools used. The defined dataset is the minimum set of parameters to run a dynamic simulation on an hourly or sub-hourly basis.

2.2 Database Cataloguing

Data availability, data quality, and data accessibility at the city scale represent future challenges of our societies (Goy et al., 2020). Especially public administrations must face this difficult task since they are responsible for collecting the data. In this regard, achieving standardised data formats, harmonised procedures, and minimum data requirements between different Regions could reduce the efforts required to UBEM developers. In this context, the categorisation of the existing local, regional, and national information systems plays a pivotal role in contributing to informed decision-making and sustainable development.

The attribution of the BAs to the analysed building stock is typically accomplished using the following criteria: climatic zone, building use category, and construction period. The subdivision of climatic zones is conducted at the national level. In more challenging scenarios, the determination of the building use category may involve on-site inspection or rely on the modeller's expertise. However, the identification of the ages of buildings poses difficulties, particularly because open GIS maps and regional geographical databases seldom contain such information. To address this issue, Zagarella (2019) proposed a systematic procedure to determine the prevailing construction period of buildings depending on building-related parameters. Without such a method, attributing the BA to the analysed urban configuration becomes very complicated, making the building archetype-based approach less effective in mitigating data uncertainty. Furthermore, building energy consumption is sensitive data that is usually not released due to privacy issues. In UBEM, this information is indispensable for calibrating or validating energy models. Once the UBEM data classification has been set, the necessity is to review, list, and organise the available existing Italian information systems to collect

the relevant data to generate the BAs. In the UBEM project (UBEM, 2024), the databases were grouped into the following categories: i) "source type", which indicates the origin of the information, ii) "accessibility", which denotes the constraint levels of the informative systems, iii) "database digitalisation", connected to the presence of data either in digital online or offline form or in paper-based documents, and iv) "data granularity", associated to the measure of the level of detail of the information. In Fig. 1, the criteria for classifying local, regional, or national databases for each of the categories proposed are depicted.

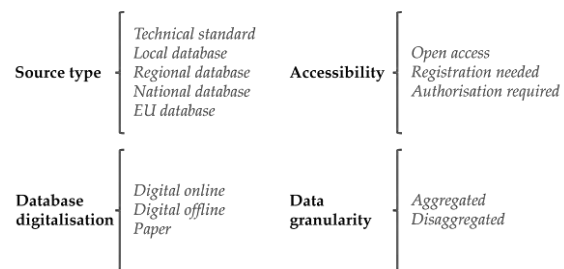


Fig. 1 – Database cataloguing criteria adopted in UBEM (2024)

2.3 Archotyping and Sensitivity Analysis

The BAs embed the most common and typical technologies shared by a group of similar buildings. A significant research advancement in this field can be attributed to the well-recognised and pioneering TABULA project (TABULA, 2009-2012), which harmonised the building typology approach across numerous EU countries.

The BA encapsulates both geometric and non-geometric data that summarise the building's stock energy performance. The data integrated into the BA schema can be presented from either a deterministic or probabilistic standpoint. However, the association of the confidence interval to the data included in the BA schema contemplates and manifests the high uncertainty related to UBEM development.

To emphasise the importance of having a statistical range to guide the UBEM modeller's decisions, conducting a SA becomes imperative. This approach enables observations of how variations in crucial input data influence the model's output, particularly in terms of the building's energy need.

3. Application

The probabilistic BAs simulated in CitySim Pro were generated using data extracted from the energy performance certificate (EPC) database of the Aosta Valley Region. This Italian Region was chosen within the framework of the URBEM project. Then, a local large-scale sensitivity energy analysis was conducted on a residential block located in the municipality of Aosta, highlighting the significant impact of key URBEM inputs on the overall performance of the building stock.

3.1 CitySim Pro

CitySim Pro—developed by the Solar Energy and Building Physics Laboratory of EPFL (L'École Polytechnique Fédérale de Lausanne)—is one of the most recognised and used URBEM tool (Robinson et al., 2009). The calculation engine of the software is CitySim Solver (CitySim Solver, 2024) on which the KAEMCO company developed a graphical user interface. CitySim Pro is a dynamic hourly energy model with a Resistive-Capacitive system that discretises the building envelope components into nodes of temperature, thermal resistances, and heat capacities (Emmanuel and Kämpf, 2015).

3.2 Case Study

The case study examines a real residential block situated in the municipality of Aosta (583 m a.s.l.). This city block consists of twenty-one buildings, five of which are single-family houses (SFHs), while the others are apartment blocks (ABs). The construction period range of these buildings was determined based on the findings of D'Alonzo et al. (2020). Fig. 2 presents the residential building stock analysed, including details such as the building code, size and shape, construction period range, and compactness ratio.

The Level of Detail (LOD) of the urban geometry scene was improved through a series of steps. Initially, the building footprint (LOD0) was established using data from the OpenStreetMap database. Then, the objects were extruded (LOD1), capturing the slopes of the roofs (LOD2). Additionally, further adjustments were made to enhance the accuracy of the assessed objects, such as converting

incorrect volumes into shading elements (see Fig. 3).



Fig. 2 – Satellite view of the city block (source GoogleMaps)

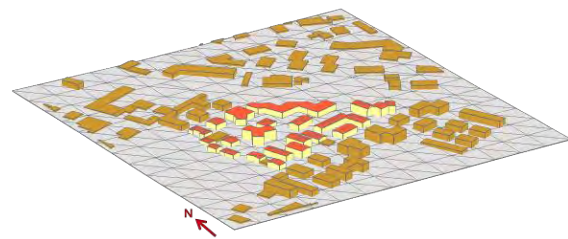


Fig. 3 – Urban scene imported in CitySim Pro

The interquartile ranges of the building fabric performance parameters, encompassing thermal transmittance of walls (U_{wi}), floors (U_{fi}), roofs (U_{ri}), and windows (U_{wi}), and the WWR were calculated from the data included in the EPC database of the Aosta Valley Region. The EPCs were categorised considering the different climatic zones, building use categories, construction periods, and size and shape for residential buildings (e.g., SFHs and ABs). Following the determination of the first (Q_1), second (Q_2), and third (Q_3) quartiles of thermal transmittances, the layers of the building components and thermal characteristics of the materials were extracted from UNI/TR 11552 (UNI, 2014). To propose an example, Table 1 presents the thermal transmittances of the walls per building construction types, quartiles, and construction period ranges.

The building construction type was assigned to the building based on the statistical prevalence derived from the EPCs of each specific cluster. Before 1945, load-bearing stone masonry was the predominant type, transitioning to reinforced concrete structures

with brick walls and load-bearing brick masonry thereafter. SFHs were assumed to have floors adjacent to the ground, while the thermal transmittance of the floors facing unconditioned spaces was considered for ABs. The floors of the ABs D1 and F2 are elevated *pilotis* storeys. Additionally, the roofs are differentiated whether the upper floor is flat or sloped.

Table 1 – Thermal transmittances of the walls per building construction type and construction period (a)

U_{wl} ($W \cdot m^{-2} \cdot K^{-1}$)	1919-45			1946-61			1962-71		
	Q_1	Q_2	Q_3	Q_1	Q_2	Q_3	Q_1	Q_2	Q_3
S ^(*)	1.01	1.64	2.01	0.70	1.57	2.10			
C	0.66	1.02	1.30	0.80	1.10	1.23	0.85	1.10	1.22
B	0.64	1.18	1.43	0.77	1.10	1.34	0.76	1.13	1.27

(*) S = load-bearing stone masonry; C = reinforced concrete skeleton with brick walls; B = load-bearing brick masonry

Table 2 – Thermal transmittances of the walls per building construction type and construction period (b)

U_{wl} ($W \cdot m^{-2} \cdot K^{-1}$)	1972-81			1982-91		
	Q_1	Q_2	Q_3	Q_1	Q_2	Q_3
C	0.82	1.10	1.23	0.51	0.88	1.08

For the various construction period ranges, the WWR is differentiated between SFHs and ABs. The calculated window-to-wall ratio was assumed to be the same for every building orientation. The WWR extracted from the EPCs issued for single building units was used for the whole apartment blocks. The median values representing the glazing ratio are between 9 % and 18 %, with the WWR of SFHs generally lower than those of ABs.

The window glazing type was used to cluster the U_w values. An example is depicted in Fig. 4 for different construction periods. The total solar energy transmittance of glazing was derived from a technical standard (CTI, 2021), depending on the glazing types adopted.

The Typical Meteorological Year file elaborated by the Italian Thermo-technical Committee (CTI, 2024) was used in the simulation. Moreover, the sched-

ules and intensities of the internal heat gains (occupants, appliances, and lighting) were derived from the draft of the Italian National Annex of UNI EN 16798-1 (CTI, 2022). An infiltration rate equal to 0.30 h^{-1} was assumed for every building.

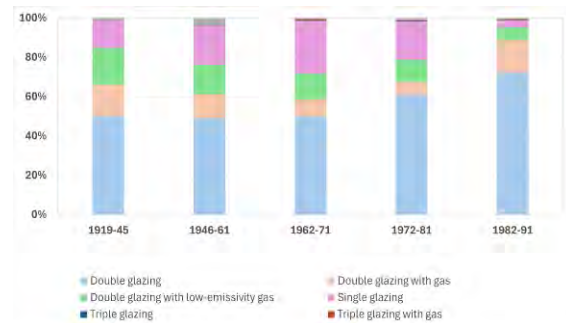


Fig. 4 – Glazing type share per construction period

3.3 Sensitivity Analysis

A local large-scale SA was performed by varying one at a time different features of the building envelope, such as the thermal transmittance of opaque walls, floors, roofs, and windows, as well as the WWR, within their respective interquartile ranges.

Three groups of simulations (OP_, W_, and WWR_) were conducted. These groups evaluate the variation of the performance of the opaque (U_{wl} , U_{lf} , and U_{ur}) and transparent (U_w) building envelope components, as well as different WWR values. Each group comprises two scenarios, defined based on the values of the first quartile (Q_1) in the first case and the third quartile (Q_3) in the second for each considered parameter. These scenarios were compared with the baseline, which was determined by assuming the median values for each parameter.

4. Results and Discussion

The Aosta municipality experiences a climate dominated by space heating. Therefore, only the variation in the building's energy need for space heating ($EP_{H,nd}$) for the different configurations has been evaluated, thus excluding the cooling need.

In **Error! Reference source not found.**, the outcomes of the three model configurations, each with two scenarios—considering Q_1 and Q_3 values,

respectively—are compared with the outcomes of the simulation carried out with the median values applied. The opaque building fabric's performance reveals to be the most impactful factor influencing the variation of the EP_{Hnd} , with percentage fluctuation between -33% and 37% . Across various buildings, the trend remains consistent: as the thermal transmittance of the building envelope components decreases, the thermal ener-

gy need decreases (OP_Q1), whereas the opposite pattern is observed in OP_Q3.

A similar trend is observed when analysing the thermal performance of different windows (W_Q1 and W_Q3), but the percentage impact (between -6% and 3%) is an order of magnitude lower compared to the previous case, due to limited WWR compared to the opaque fraction.

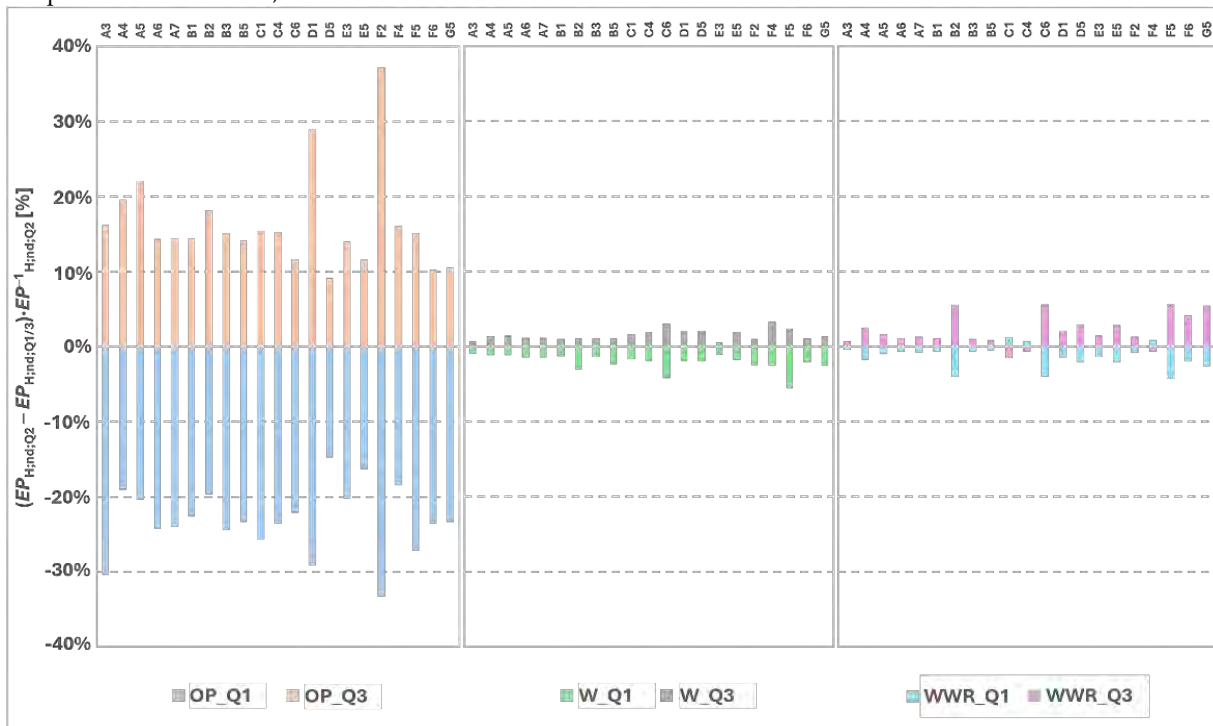


Fig. 5 – Results of the SA. Space heating variation of the city block for different scenarios of the building envelope parameters

In the SA for the WWR, reducing the glazing fraction (WWR_Q1) decreases the heat transfer through transmission, thereby reducing the EP_{Hnd} . Conversely, increasing WWR in configuration WWR_Q3 leads to the opposite trend. Notably, a reverse pattern can be observed for well-sun-exposed buildings C1, C4, and F4, where the solar heat gains compensate for and exceed the heat losses through transmission. Globally, the percentage variation of WWR_Q1 and WWR_Q3 scenarios is between -4% and 6% . The incidence of WWR accounts more during the summer season since the energy need for space cooling decreases reducing the WWR, and vice versa.

5. Conclusion

The variation in heating energy need was assessed ranging one at a time the key input indicators within their confidence intervals. The BA workflow from the generation to the exploitation phase was evaluated to support the development of a national building renovation plan in a UBEM environment. The UBEM data classification, which involves cataloguing the required input data, was carried out. Then, the review and organisation of existing Italian local, regional, and national databases to derive the thermal properties of the building envelope, the technical building system characteristics, the building occupancy, and the climatic data were identified. Next, considering a UBEM archetype-based approach, the effect of the variation of the building fabric performance and WWR within the

confidence interval of their BA schema was explored for a case study located in the northern part of Italy. The SA showed the major impact on the output resulting from the different characterisation of the thermal performance of the opaque building envelope components. This aspect suggests the need for precise determination of the thermal transmittances of walls, roofs, and floors. However, the limitations of this work are related to the limited information available in the EPCs.

The spread in the distribution of the outcomes for the analysed city block highlights the need for more reliable and representative statistical samples to define the BA schema. The validation of BAs is of foremost importance above all when low-quality input data are used in the analysis.

The future steps of the work will focus on implementing and validating the created BAs to be used in UBEMs. Then, according to the methodology proposed in this work, a future implementation will be focused on detailed SA obtained by combining the variation of different parameters in a single simulation to assess if the discrepancies would be increased or compensated.

Acknowledgement

The study was developed within the framework of the project URBEM (PRIN, code: 2020ZWKXKE), which has received funding from the Italian Ministry of University and Research (MUR).

Nomenclature

Symbols

EP	energy performance ($\text{kWh}\cdot\text{m}^{-2}$)
U	thermal transmittance ($\text{W}\cdot\text{m}^{-2}\cdot\text{K}^{-1}$)
WWR	window-to-wall ratio (%)

Subscripts

H	heating	uf	upper floor
lf	lower floor	w	window
nd	need	wl	wall

References

- Borges, P., Travasset-Baro, O., and Pages-Ramon, A. 2022. "Hybrid approach to representative building archetypes development for urban models – A case study in Andorra". *Building and Environment* 215. <https://doi.org/10.1016/j.buildenv.2022.108958>.
- Carnieletto, L., Ferrando, M., Teso, L., Sun, K., Zhang, W., Causone, F., et al. 2021. "Italian prototype building models for urban scale building performance simulation". *Building and Environment* 192. <https://doi.org/10.1016/j.buildenv.2021.107590>.
- Cerezo, C., Sokol, J., AlKhaled, S., Reinhart, C., Al-Mumin, A., and Hajiah, A. 2017. "Comparison of four building archetype characterization methods in urban building energy modeling (UBEM): A residential case study in Kuwait City". *Energy and Buildings* 154: 321-334. <https://doi.org/10.1016/j.enbuild.2017.08.029>.
- Chen, Y., Hong, T., Luo, X., and Hooper, B. 2019. "Development of city buildings dataset for urban building energy modeling". *Energy and Buildings* 183: 252-265. <https://doi.org/10.1016/j.enbuild.2018.11.008>.
- CitySim Solver. 2024. "CitySim Solver Official Code web-site". Accessed March 24, 2024. <https://github.com/kaemco/CitySim-Solver>.
- D'Alonzo, V., Novelli, A., Vaccaro, R., Vettorato, D., Albatici, R., Diamantini, C., et al. 2020. "A bottom-up spatially explicit methodology to estimate the space heating demand of the building stock at regional scale". *Energy and Buildings* 206. <https://doi.org/10.1016/j.enbuild.2019.109581>.
- Dascalaki, E. G., Droutsas, K. G., Balaras, C. A., and Kontoyiannidis, S. 2011. "Building typologies as a tool for assessing the energy performance of residential buildings – A case study for the Hellenic building stock". *Energy and Buildings* 43 (12): 3400-3409. <https://doi.org/10.1016/j.enbuild.2011.09.002>.
- Emmanuel, W., and Kämpf, J. H. 2015. "A verification of CitySim results using the BESTEST and monitored consumption values". In *Proceedings of Building Simulation Application*

- 2015: 2nd Conference of IBPSA-Italy. Bozen, Italy, 4-6 February 2015.
- European Commission. 2024. "Directive (EU) 2024/1275 of the European Parliament and of the Council of 24 April 2024 on the Energy performance of buildings (recast)", *Official Journal of the European Union*, 24 April 2024.
- Goy, S., Maréchal, F., and Finn, D. 2020. "Data for Urban Scale Building Energy Modelling: Assessing Impacts and Overcoming Availability Challenges". *Energies* 13 (16). <https://doi.org/10.3390/en13164244>.
- HosseiniHaghighi, S., de Uribarri, P. M. Á., Padsala, R., and Eicker, U. 2022. "Characterizing and structuring urban GIS data for housing stock energy modelling and retrofitting". *Energy and Buildings* 256. <https://doi.org/10.1016/j.enbuild.2021.111706>.
- Italian Organisation for Standardisation (UNI). 2014. *Opaque envelope components of buildings – Thermophysical parameters (UNI/TR 11552)*. In Italian. UNI: Milan, Italy.
- Italian Thermo-technical Committee (CTI). 2021. *Draft of the Italian National Annex to UNI EN ISO 52016-1 (document no. 020200134)*. Restricted document. CTI: Milan, Italy.
- Italian Thermo-technical Committee (CTI). 2022. *Draft of the Italian National Annex to EN 16798-1 (document no. 024100360)*. Restricted document. CTI: Milan, Italy.
- Italian Thermo-technical Committee (CTI). 2024. "Typical Meteorological Year (2015)". Accessed March 24, 2024. <https://try.cti2000.it>.
- Johari, F., Shadram, F., and Widén, J. 2023. "Urban building energy modeling from geo-referenced energy performance certificate data: Development, calibration, and validation". *Sustainable Cities and Society* 96. <https://doi.org/10.1016/j.scs.2023.104664>.
- Oraiopoulos, A., and Howard, B. 2022. "On the accuracy of Urban Building Energy Modelling". *Renewable and Sustainable Energy Reviews* 158. <https://doi.org/10.1016/j.rser.2021.111976>.
- Pasichnyi, O., Wallin, J., and Kordas, O. 2019. "Data-driven building archetypes for urban building energy modelling". *Energy* 181: 360-377. <https://doi.org/10.1016/j.energy.2019.04.197>.
- Pernetti, R., Garzia, F., and Oberegger, U. F. 2021. "Sensitivity analysis as support for reliable life cycle cost evaluation applied to eleven nearly zero-energy buildings in Europe". *Sustainable Cities and Society* 74. <https://doi.org/10.1016/j.scs.2021.103139>.
- Piro, M., Ballarini, I., and Corrado, V. 2023. "From Building Energy Models (BEM) to Urban Building Energy Models (UBEM): input data and modelling approaches". In *Proceedings of Building Simulation 2023: 18th Conference of IBPSA*. Shanghai, China, 4-6 September 2023.
- Reinhart, C. F., and Cerezo Davila, C. 2016. "Urban building energy modeling – A review of a nascent field". *Building and Environment* 97: 196-202. <https://doi.org/10.1016/j.buildenv.2015.12.001>.
- Robinson, D., Haldi, F., Kämpf, J., Leroux, P., Perez, D., Rasheed, A., et al. 2009. "CITYSIM: Comprehensive Micro-Simulation of Resources Flows for Sustainable Urban Planning". In *Proceedings of Building Simulation 2009: 11th Conference of IBPSA*. Glasgow Scotland, 27-30 July 2009.
- Swan, L. G., and Ugursal, V. I. 2009. "Modeling of end-use energy consumption in the residential sector: A review of modeling techniques". *Renewable and Sustainable Energy Reviews* 13 (8): 1819-1835. <https://doi.org/10.1016/j.rser.2008.09.033>.
- Typology Approach for Building Stock Energy Assessment (TABULA). 2009-2012. "Typology Approach for Building Stock Energy Assessment web-site". Accessed March 24, 2024. <https://episcopes.eu/iee-project/tabula/>.
- Urban Reference Buildings for Energy Modelling (URBEM). 2024. "Urban Reference Buildings for Energy Modelling web-site". Accessed March 24, 2024. <https://www.urbem.polimi.it/en/>.
- Zagarella, F. 2019. *Estimating the buildings hourly energy demand for smart energy district planning*. Ph.D. thesis, Politecnico di Milano (Italy).