

Simulation and Identification of a Seismic Bistable Device with Hysteresis

*Original*

Simulation and Identification of a Seismic Bistable Device with Hysteresis / Cavanni, V., Scussolini, L., Bursi, O.S., Coulais, C., Ceravolo, R.. - ELETTRONICO. - (2025), pp. 55-57. (2025 Nineteenth International Congress on Artificial Materials for Novel Wave Phenomena (Metamaterials) Amsterdam (NL) 01-06 September 2025) [10.1109/metamaterials65622.2025.11174200].

*Availability:*

This version is available at: 11583/3004109 since: 2025-11-04T09:17:03Z

*Publisher:*

IEEE

*Published*

DOI:10.1109/metamaterials65622.2025.11174200

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

IEEE postprint/Author's Accepted Manuscript

©2025 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

# Simulation and Identification of a Seismic Bistable Device with Hysteresis

*V. Cavanni*<sup>1</sup>, *L. Scussolini*<sup>1</sup>, *O.S. Bursi*<sup>2</sup>, *C. Coulais*<sup>3</sup>, and *R. Ceravolo*<sup>1,4</sup>

<sup>1</sup> *Politecnico di Torino, Department of Structural, Geotechnical, and Building Engineering, Corso Duca degli Abruzzi 24, 10129, Turin, Italy*

<sup>2</sup> *Università di Trento, Department of Civil, Environmental and Mechanical Engineering, Via Mesiano 77, 38123, Trento, Italy*

<sup>3</sup> *Universiteit van Amsterdam, Institute of Physics, Science Park 904, 1018 XE, Amsterdam, The Netherlands*

<sup>4</sup> *Politecnico di Torino, Responsible Risk Resilience interdepartmental Centre (R3C), Corso Duca degli Abruzzi 24, 10129, Turin, Italy*

**Abstract** – Mechanical metamaterials with bistable configurations offer a promising solution for enhancing energy dissipation in existing structures subjected to dynamic excitations. This research focuses on a pre-buckled steel bistable device engineered for energy dissipation, examining the critical interplay between geometric nonlinearity and hysteretic behaviour. The classical Bouc-Wen model is here modified to incorporate the effects of bistability. The study includes parametric simulations and instantaneous identification of the proposed model parameters. Finally, an equivalent damping factor that considers both viscous and hysteretic dissipation is calculated.

## I. BISTABLE BOUC WEN MODEL

Mechanical metamaterials [1] with negative stiffness (NS) allow the definition of geometries that exhibit two static stable configurations, such as tilted, curved, and arched beams [2]. When these bistable systems are subjected to dynamic excitations, they can oscillate in two distinct regimes [3]: intrawell regime and interwell regime. In the interwell regime, the snap-through phenomenon occurs, resulting in high velocities within the system and leading to significant dissipation. This behaviour suggests that a device for energy dissipation may be developed by coupling NS – specifically a steel cosine-shaped-plate (CSP) – with a vibrating mass. Bistable systems have been investigated in dynamic regimes almost exclusively in the elastic field, and their behaviour can be described by the following motion equation incorporating geometric nonlinearity [3]:

$$m\ddot{u} + c\dot{u} + k_1u + k_3u^3 = -m\ddot{u}_g \quad (1)$$

where  $m$  is the mass,  $c$  the linear viscous damping,  $k_1$  the negative linear stiffness,  $k_3$  the positive cubic stiffness,  $u_g$  the ground motion,  $u$  the displacement, and the superposed dots indicates time differentiation.

However, the effect of plasticisation on such systems still needs to be explored. Therefore, to capture hysteresis during motion, the classical Bouc-Wen model [4]-[7] is modified to include bistability, forming the bistable Bouc-Wen (BBW) model. An equivalent nonlinear restoring force,  $r_{BBW}$ , that considers both bistability and hysteresis can be defined as:

$$\begin{cases} r_{BBW} = r(u, \dot{u}) + k_3u^3 \\ \dot{r} = f(\dot{u}, r, \boldsymbol{\theta}) \end{cases} \quad (2)$$

where  $r$  is the restoring force from the Bouc-Wen model, slightly modified to account for the negative linear stiffness of a bistable system. The derivative of this restoring force component depends on the velocity, the restoring force  $r$ , and a vector of model parameters  $\boldsymbol{\theta}$ . It consists of two contributions – linear and hysteretic – and can be expressed as:

$$\dot{r} = \dot{r}_L + \dot{r}_H = k_1\dot{u} + k_{BW}\dot{u} = [k_1 + k_{BW}]\dot{u} \quad (3)$$

where  $k_{BW}$  is an equivalent stiffness accounting for the hysteretic behaviour and is a function of the modal parameters  $\boldsymbol{\theta} = [\beta, \gamma, N]$  the velocity  $\dot{u}$ , and the restoring force  $r$ . It is defined as:

$$k_{BW} = -[\beta \cdot \text{sign}(\dot{u} \cdot r) + \gamma]|r|^N \quad (4)$$

The equation of motion that governs the bistable system with hysteretic behaviour reads,

$$\begin{cases} m\ddot{u} + c\dot{u} + r_{BBW}(u, \dot{u}) = -m\ddot{u}_g \\ r_{BBW} = r(u, \dot{u}) + k_3 u^3 \\ \dot{r} = \{k_1 - [\beta \cdot \text{sign}(\dot{u} \cdot r) + \gamma]|r|^N\}\dot{u} \end{cases} \quad (5)$$

corresponding to the system illustrated in Fig. 1(a).

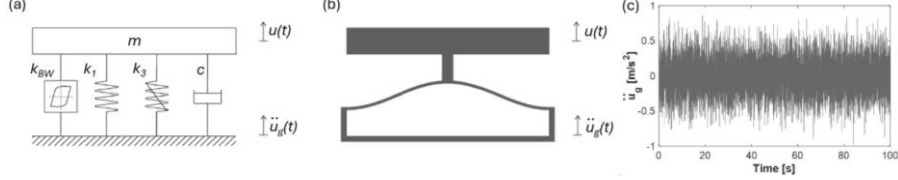


Fig. 1. (a) Bistable-Bouc-Wen (BBW) model for a SDoF, (b) seismic dissipation device unit cell, and (c) input excitation.

The BBW model can describe the response of an energy dissipation device consisting of pre-buckled NS device coupled with a vibrating mass (Fig. 1(b)), where the device consists of a corrugated plate with specific geometrical and mechanical characteristics designed to satisfy the onset buckling condition. Among the stiffness terms,  $k_1$  and  $k_3$  are determined by the geometry of the CSP [3]. By fixing its span to 0.5 m, the height to 0.03 m, and the thickness to 0.001 m,  $k_1$  is equal to  $-693.08$  N/m, while  $k_3$  is  $6.34e05$  N/m<sup>3</sup>. Whilst  $k_{BW}$  is a function of the model parameters  $\theta$ , which are not directly known. Therefore, an investigation into the influence of these parameters on the device response is necessary. For what concerns the hysteretic model parameters, the parameter  $N$  is fixed equal to 2, according to [8], whilst the constraints of  $\beta > 0$  and  $-\beta < \gamma < \beta$  were imposed [9]. Six combinations of the model parameters  $\theta$  are considered: *Model 1* –  $\theta_1 = [0.5, -0.4, 2]$ , *Model 2* –  $\theta_2 = [0.5, 0.4, 2]$ , *Model 3* –  $\theta_3 = [10, -9, 2]$ , *Model 4* –  $\theta_4 = [10, 9, 2]$ , *Model 5* –  $\theta_5 = [100, -99, 2]$ , and *Model 6* –  $\theta_6 = [100, 99, 2]$ . The equation of motion (5) is solved considering a mass of 58.4 kg, a damping ratio  $\zeta$  of 3%, and a Gaussian noise base acceleration of 100 s. The sampling time is 0.01 s, and with peak value is set to 0.1g (see Fig. 1(c)). Fig. 2(a) shows the displacement time-history of the vibrating mass for each model, whilst Fig. 2(b) presents the relative nonlinear restoring force  $r_{BBW}$ . Fig. 2(c) presents the two contributions to the dissipated energy: the viscous dissipated energy,  $E_{d,c} = c \int_0^{t_{end}} \dot{u}^2 dt$ , and the hysteretic dissipated energy,  $E_{d,H} = \oint r_{BBW} du$ .

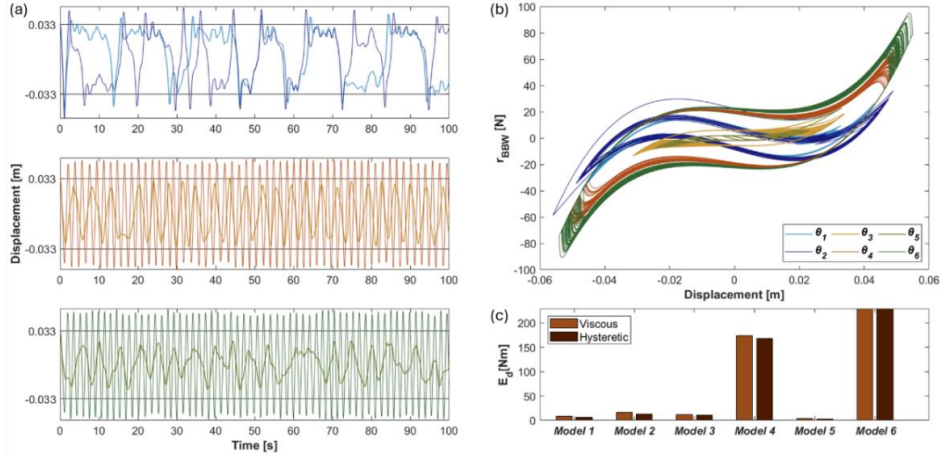


Fig. 2 (a) Displacement time-histories, (b) total restoring force  $r_{BBW}$ , and (c) viscous and hysteretic dissipated energy.

To validate the proposed model, an instantaneous identification procedure [10] of the nonlinear parameters involved in the behaviour description is proposed here. The procedure is set in a time-frequency framework, exploiting a quadratic time-frequency transform, with all the advantages that follow. The procedure is based on instantaneously minimizing the distance between the Wigner-Ville transform [11] of a generic hysteretic bistable displacement of the device and the transform of the displacement calculated using the proposed model. The results of the procedure for the Bouc-Wen parameters set  $\theta_2$  under a unitary white Gaussian noise are reported in Fig. 3.

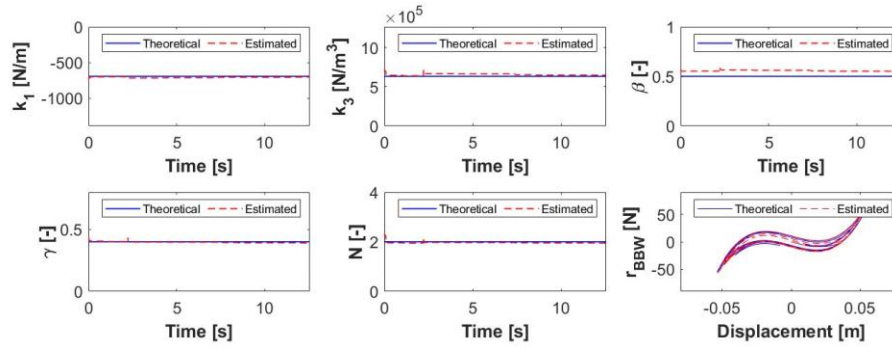


Fig. 3 Bistable and hysteretic parameters estimation results for the proposed model.

## II. CONCLUSION

This study explores bistability-hysteresis interplay in NS metamaterials for energy dissipation. The results allow the determination of an equivalent damping ratio  $\zeta_{eq}$  for each of the six proposed models, namely  $\zeta_{eq} \approx [5.3\%, 5.5\%, 5.7\%, 5.9\%, 4.7\%, 6.0\%]$ , demonstrating that the hysteresis nearly doubles the viscous dissipation. However, degradation must be investigated to assess the device re-usability under repeated excitations. This will be investigated through an experimental campaign aimed at identifying the model parameters that optimise bistable device for energy dissipation. Finally, the introduction of parallel multi-cell configurations combined with resonators will further enhance dissipation performance in the perspective of a seismic bistable finite lattice.

## ACKNOWLEDGEMENT

This publication is part of the project PNRR-NGEU, which has received funding from the MUR-DM 118/2023. The research was supported by Fondazione Compagnia di San Paolo, OPTIMISE project, call TRAPEZIO – Paving the way to research excellence and talent.

## REFERENCES

- [1] X. Yu, J. Zhou, H. Liang, Z. Jiang, and L. Wu, "Mechanical metamaterials associated with stiffness, rigidity and compressibility: A brief review," *Prog Mater Sci*, vol. 94, pp. 114–173, 2018.
- [2] X. Tan *et al.*, "Effect of beam configuration on its multistable and negative stiffness properties," *Compos Struct*, vol. 286, p. 115308, 2022.
- [3] R. L. Harne and K. W. Wang, *Harnessing bistable structural dynamics: for vibration control, energy harvesting and sensing*. John Wiley & Sons, 2017.
- [4] R. Bouc, "Modele mathematique d'hysteresis," *Acustica*, vol. 21, pp. 16–25, 1971.
- [5] Y.-K. Wen, "Method for random vibration of hysteretic systems," *Journal of the engineering mechanics division*, vol. 102, pp. 249–263, 1976.
- [6] F. Ikhouane, V. Mañosa, and J. Rodellar, "Dynamic properties of the hysteretic Bouc-Wen model," *Syst Control Lett*, vol. 56, no. 3, pp. 197–205, 2007.
- [7] Y. K. Wen, "Equivalent Linearization for Hysteretic Systems Under Random Excitation," *J Appl Mech*, vol. 47, no. 1, pp. 150–154, 1980.
- [8] Y. J. Park, Y. K. Wen, and A. H. Ang, "Random vibration of hysteretic systems under bi-directional ground motions," *Earthq Eng Struct Dyn*, vol. 14, no. 4, pp. 543–557, 1986.
- [9] S. Erlicher and O. S. Bursi, "Bouc-Wen-Type Models with Stiffness Degradation: Thermodynamic Analysis and Applications," *J Eng Mech*, vol. 134, no. 10, pp. 843–855, 2008.
- [10] Ceravolo, R., Demarie, G. V., & Erlicher, S., "Instantaneous identification of degrading hysteretic oscillators under earthquake excitation". *Structural Health Monitoring*, vol. 9, no. 5, pp. 447–464, 2010.
- [11] R. Ceravolo, "Time–frequency analysis", *Encyclopedia of Structural Health Monitoring*, 2009.