

On the Stability of Dynamical Multi-Commodity Flow Networks

Original

On the Stability of Dynamical Multi-Commodity Flow Networks / Sipione, D., Como, G.. - (2025), pp. 224-229. (64th IEEE Conference on Decision and Control, CDC 2025 Rio de Janeiro (Brazil) 09-12 December 2025) [10.1109/cdc57313.2025.11312216].

Availability:

This version is available at: 11583/3008707 since: 2026-03-12T15:39:05Z

Publisher:

Institute of Electrical and Electronics Engineers - IEEE

Published

DOI:10.1109/cdc57313.2025.11312216

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2025 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

On the Stability of Dynamical Multi-Commodity Flow Networks

Davide Sipione, Giacomo Como

Abstract—We study a class of dynamical multi-commodity flows in transportation networks. These are modeled as dynamical systems describing the evolution of the densities of a number of different commodities across the cells of a transportation network. Each cell is characterized by commodity-specific increasing demand functions returning the maximum outflow of each commodity from the cell as a function of the current density of that commodity, as well as a decreasing supply function returning the total maximum inflow that is allowed in the cell as a function of the current aggregate density in the cell. Every commodity is characterized by a different routing matrix, whose entries describe the turning ratios between adjacent cells. We identify a (typically convex) capacity region: for exogenous inflow vectors belonging to that region, we prove the existence of a locally asymptotically stable free-flow equilibrium point. Building on a contraction argument, we also provide an estimate of the basin of attraction of such free-flow equilibrium point. Finally, we analyze a simple special case showing that, when the exogenous inflow vector does not belong to the region of stability, non-free flow equilibrium points might arise.

I. INTRODUCTION

Transportation systems have evolved in recent years due to increasing users' heterogeneity and infrastructure reshaping to tackle environmental challenges. The traffic modeling and control problem has been an important field of study for almost over a century [1] and [2] leading to models still widely used in recent years. This is the case of the celebrated Cell Transmission Model (CTM), [3] and [4], that efficiently simulates traffic conditions such as congestion, bottlenecks and shockwaves, making it a great tool for both theoretical studies and real-world applications.

In this paper, we consider a class of multi-commodity dynamical flow networks, modeled as dynamical systems driven by mass conservation laws on directed multigraphs. The nodes of the graph represent junctions and the links can be identified with (portions of) roads. Multiple commodities (representing, e.g., different types of vehicles) share the same infrastructure and interact between each other. The laws of mass conservation model how traffic volume varies on each link. Demand functions determine the maximum total outflow for each commodity and link while supply functions are shared by commodities and model the maximum total inflow for each link. Some links work as sources (on-ramps) whose total inflow corresponds to a constant exogenous input

of traffic volume coming from the external world. To make it possible for vehicles to leave the network some link act as sinks (off-ramps) whose total outflow simply corresponds to their demand function.

This setting is widely used in the field of transportation networks, where models tend to differ based on how congestion is handled. In fact, many allocation rules can be found in the literature: a non-FIFO rule ([5]), FIFO rules ([6], [7] and [8]), and mixed rules ([9]). The main difference between these rules appear when the supply functions are not able to accommodate the whole incoming flow and thus congestion is generated. In this paper we focus on the study of the free-flow equilibrium points. Hence, if all these model act in the same way when in free-flow, then it is possible to study them together. So, we shall take in consideration models such that in free-flow the flow between two links is simply the demand function multiplied by a *turning ratio*, which is the percentage of flow directed to that particular link.

Given these considerations, it is possible to characterize the stability properties of this class of models. In fact, within the space of the exogenous inflow there exists a (convex) stability region, such that if the exogenous inflow lies strictly inside it, then the network admits a locally asymptotically stable equilibrium point. However, when this condition does not occur, two distinct situations can happen: the traffic volume of some links grows unbounded or the system still converges to an equilibrium. Although this second case is hard to characterize, we shall provide an insightful example such that this congested equilibrium point can be analytically computed.

This paper provides a novel mathematical model for multi-commodity dynamical flow networks which groups previously studied models (e.g., [10]) that act in the same way inside the free-flow region. The stability of this class of models is studied by generalizing results obtained in single commodity scenarios ([5], [8]) and the presence of a free-flow equilibrium point is characterized. It is worth mentioning that the multi-commodity dynamical flow network model considered in this paper differs from [11], where the commodities adopt dynamic routing rules on acyclic networks. Similar classes of multi-commodity flow networks are also studied in [12], within the framework of strong input-to-state stability: our approach, based on l_1 -contraction, differs from the one in [12] and provides tighter results (for a more specific class of dynamical flow networks).

The rest of the paper is organized as follows: in the remainder of this section we provide some basic notation. In Section II we introduce the setting of transportation networks and we exploit it to introduce the class of models under

D. Sipione and G. Como are with the Department of Mathematical Sciences, Politecnico di Torino, Torino, Italy ({davide.sipione,giacomo.como}@polito.it). G. Como is also with the Department of Automatic Control, Lund University, Sweden. This work was partially supported by the Research Project PRIN 2022 "Extracting Essential Information and Dynamics from Complex Networks" (Grant Agreement number 2022MBC2EZ) funded by the Italian Ministry of University and Research.

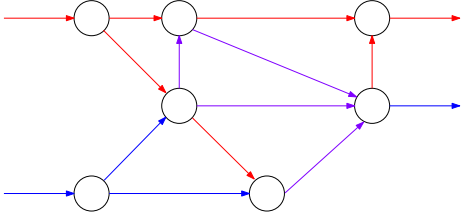


Fig. 1: Two commodities share the same infrastructure: blue links are reserved for commodity 1, red links for commodity 2, and purple links can be used by both

study, providing some useful examples of different models. In Section III we study the stability of these models and state our main results. Section IV provides an insightful analytical example. Finally, in Section V conclusions are drawn and possible future research topics are issued. The proofs of the theoretical results are omitted and can be found in the extended version of this paper [13].

Notation

The sets \mathbb{R} and \mathbb{R}_+ represent the sets of real and non-negative numbers, respectively. Given two finite sets \mathcal{A} and \mathcal{B} then $\mathbb{R}^{\mathcal{A}}$ is the set of real numbers indexed by elements of \mathcal{A} . Similarly, $\mathbb{R}^{\mathcal{A} \times \mathcal{B}}$ is the set indexed by the product set of \mathcal{A} and \mathcal{B} . A directed multigraph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ has a set of nodes \mathcal{V} and a finite multi-set of links \mathcal{E} . Two vectors σ in $\mathcal{V}^{\mathcal{E}}$ and τ in $\mathcal{V}^{\mathcal{E}}$ such that σ_i and τ_i are two nodes representing the tail and head node of a link i in \mathcal{E} .

II. MODEL

A. Multi-commodity Transportation Networks

We model the topology of the transportation network as a nonempty finite directed multigraph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ with node set \mathcal{V} and link set \mathcal{E} . Every link i in \mathcal{E} is directed from its tail node σ_i in \mathcal{V} to its head node τ_i in $\mathcal{V} \setminus \{\sigma_i\}$ and represents a cell (or road section). Every node v in \mathcal{V} represents either a junction or the interface between two adjacent cells.¹ A special node w in \mathcal{V} represents the external world: links i in \mathcal{E} with $\sigma_i = w$ are called on-ramps, while links i in \mathcal{E} such that $\tau_i = w$ are called off-ramps. We denote the sets of on-ramps and off-ramps as $\mathcal{R} = \{i \in \mathcal{E} : \sigma_i = w\}$ and $\mathcal{S} = \{i \in \mathcal{E} : \tau_i = w\}$, respectively. We define the set of pairs of adjacent cells as $\mathcal{A} = \{(i, j) \in \mathcal{E} \times \mathcal{E} : \tau_i = \sigma_j \neq w\}$.

The network infrastructure is shared by a nonempty finite set \mathcal{K} of commodities. For every i in \mathcal{E} and k in \mathcal{K} , the variable $x_i^{(k)} \geq 0$ denotes the traffic volume (or density) of commodity k on cell i . Every non on-ramp cell i in $\mathcal{E} \setminus \mathcal{R}$ is characterized by a supply function $s_i : \mathbb{R}_+ \rightarrow \mathbb{R}_+$, returning the maximum possible in-flow $s_i(\sum_k x_i^{(k)})$ as a function of the total traffic volume $\sum_k x_i^{(k)}$ on that cell, and a family of demand functions $d_i^{(k)} : \mathbb{R}_+ \rightarrow \mathbb{R}_+$, for k in \mathcal{K} , each returning the maximum out-flow $d_i^{(k)}(x_i^{(k)})$ of commodity k as a function of the traffic volume $x_i^{(k)}$ of such commodity on that cell. Throughout the paper, we shall make the following assumption on the supply and demand functions.

¹Notice that assuming that $\sigma_i \neq \tau_i$ for every i in \mathcal{E} is equivalent to ruling out the presence of self-loops in \mathcal{G} .

Assumption 1. (i) The supply function s_i of every non-onramp cell i in $\mathcal{E} \setminus \mathcal{R}$ is Lipschitz-continuous, and such that

$$s_i(0) > 0, \quad s_i(\xi) \leq s_i(\eta), \quad \forall \xi \geq \eta \geq 0; \quad (1)$$

(ii) the demand function $d_i^{(k)}$ of every cell i in \mathcal{E} and commodity k in \mathcal{K} is differentiable, and such that

$$d_i^{(k)}(0) = 0, \quad (d_i^{(k)})'(\xi) > 0, \quad \forall \xi \geq 0. \quad (2)$$

Example 1. We introduce an examples of linear demand and affine supply function:

$$d_i^{(k)}(\xi) = \beta\xi \quad s_i(\xi) = \gamma - \alpha\xi$$

A simple example of a network with multiple commodities is shown in Figure 1.

To every commodity k in \mathcal{K} , we associate a routing matrix $R^{(k)}$ in $\mathbb{R}_+^{\mathcal{E} \times \mathcal{E}}$, whose entries $R_{ij}^{(k)}$ represent the fraction of commodity k outflow from cell i that is directed to cell j .

Assumption 2. For every commodity k in \mathcal{K} , the routing matrix $R^{(k)}$ in $\mathbb{R}_+^{\mathcal{E} \times \mathcal{E}}$ is such that

$$R_{ij}^{(k)} = 0, \quad \forall (i, j) \in \mathcal{E} \times \mathcal{E} \setminus \mathcal{A}, \quad (3)$$

$$\sum_{j \in \mathcal{E}} R_{ij}^{(k)} = \begin{cases} 1 & \forall i \in \mathcal{E} \setminus \mathcal{S} \\ 0 & \forall i \in \mathcal{S}, \end{cases} \quad (4)$$

and, for every i_0 in \mathcal{E} , there exists $l \geq 0$ and (i_1, i_2, \dots, i_l) in \mathcal{E}^l such that

$$i_l \in \mathcal{S}, \quad \prod_{h=1}^l R_{i_{h-1}i_h}^{(k)} > 0. \quad (5)$$

Equation (3) guarantees that non-sink cells only send flow to adjacent cells, while equation (4) implies that the outflow directed towards the external world comes only from sink cells. Moreover, equation (5) states that for each i in \mathcal{E} there exists a finite path to a sink, so that flow can always leave the network. This assumption is rather natural and implies that, for every commodity k in \mathcal{K} , the routing matrix $R^{(k)}$ is Schur stable, i.e., its spectral radius is smaller than 1, so that the matrix $I - R^{(k)}$ is invertible with nonnegative inverse

$$(I - R^{(k)})^{-1} = I + R^{(k)} + (R^{(k)})^2 + \dots \quad (6)$$

Definition 1. A Multi-commodity Transportation Network (MTN) is the tuple of a nonempty finite directed multigraph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, a finite set of commodities \mathcal{K} , supply functions s_i and demand functions $d_i^{(k)}$ satisfying Assumption 1, and routing matrices $R^{(k)}$ satisfying Assumption 2, for every cell i in \mathcal{E} and commodity k in \mathcal{K} .

B. Multi-Commodity Dynamical Flow Networks

The system's state is a time-varying element $x = x(t)$ of the nonnegative orthant

$$\mathcal{X} = \mathbb{R}_+^{\mathcal{E} \times \mathcal{K}}, \quad (7)$$

whose entries $x_i^{(k)} = x_i^{(k)}(t)$ represent the traffic volume of each commodity k in \mathcal{K} and cell i in \mathcal{E} at time $t \geq 0$.

We shall refer to the vector of traffic volumes of the same commodity k in \mathcal{K} as $x^{(k)}$ in $\mathbb{R}_+^{\mathcal{E}}$.

The system's inputs are exogenous inflows $\lambda_i^{(k)} \geq 0$ for every on-ramp i in \mathcal{E} and commodity k in \mathcal{K} , representing the rate of traffic entering the network from the external world. For notational convenience, we shall set $\lambda_i^{(k)} = 0$ for every non on-ramp cell i in $\mathcal{E} \setminus \mathcal{R}$ and refer to $\lambda = (\lambda_i^{(k)})_{i \in \mathcal{E}, k \in \mathcal{K}}$ as the exogenous inflow array.

Mass conservation then dictates that the variation of traffic volume of a commodity k in a cell i equals the difference between the total inflow to and the total outflow from that cell

$$\dot{x}_i^{(k)} = \lambda_i^{(k)} + \sum_{j \in \mathcal{E}} f_{ji}^{(k)}(x) - z_i^{(k)}(x), \quad (8)$$

where $f_{ij}^{(k)}(x) \geq 0$ is the state-dependent direct flow of commodity k in \mathcal{K} from a cell i in \mathcal{E} to another cell j in \mathcal{E} , while

$$z_i^{(k)}(x) = \begin{cases} \sum_{j \in \mathcal{E}} f_{ij}^{(k)}(x) & i \in \mathcal{E} \setminus \mathcal{S} \\ d_i^{(k)}(x_i^{(k)}) & i \in \mathcal{S}, \end{cases} \quad (9)$$

is the total out-flow of commodity k from cell i . Notice that (8) can be rewritten in compact vector form as

$$\dot{x}^{(k)} = \lambda^{(k)} + (R^{(k)})^\top z^{(k)}(x) - z^{(k)}(x) \quad \forall k \in \mathcal{K}. \quad (10)$$

In order to fully specify the dynamics of the system, we are then left to express the functional dependence of the cell-to-cell flows $f_{ij}^{(k)}(x)$ on the state x . For this, we account for:

- the demand and routing constraints, dictating that the direct flow $f_{ij}^{(k)}(x)$ of a commodity k from a cell i to another cell j should not exceed the product of demand $d_i^{(k)}(x_i^{(k)})$ times the turning ratio $R_{ij}^{(k)}$, i.e.,

$$f_{ij}^{(k)}(x) \leq R_{ij}^{(k)} d_i^{(k)}(x_i^{(k)}), \quad \forall i, j \in \mathcal{E}, k \in \mathcal{K}. \quad (11)$$

Combined with (9), (11) implies that

$$z_i^{(k)}(x) \leq d_i^{(k)}(x_i^{(k)}), \quad \forall i \in \mathcal{E}, k \in \mathcal{K},$$

i.e., the total outflow of a commodity from a cell never exceeds the demand, while (3) and (11) together imply that

$$f_{ij}^{(k)}(x) = 0, \quad \forall (i, j) \in \mathcal{E} \times \mathcal{E} \setminus \mathcal{A},$$

so that there is no direct flow of any commodity between non-adjacent cells;

- the supply constraints, dictating that the aggregate total inflow of all commodities in a non on-ramp cell i should not exceed the supply $s_i(\sum_k x_i^{(k)})$, i.e.,

$$\sum_{k \in \mathcal{K}} \sum_{j \in \mathcal{E}} f_{ji}^{(k)}(x) \leq s_i(\sum_{k \in \mathcal{K}} x_i^{(k)}), \quad i \in \mathcal{E} \setminus \mathcal{R}. \quad (12)$$

It is convenient to identify those states x in \mathcal{X} such that

$$\sum_{k \in \mathcal{K}} \sum_{j \in \mathcal{E}} R_{ji}^{(k)} d_j^{(k)}(x_j^{(k)}) < s_i(\sum_{k \in \mathcal{K}} x_i^{(k)}), \quad (13)$$

for every i in $\mathcal{E} \setminus \mathcal{R}$, i.e., where the supply constraints are inactive, even if all demand and routing constraints are met with equality. We shall refer to the set of such states as the *free-flow region* and denote it by

$$\mathcal{F} = \{x \in \mathcal{X} : (13)\}.$$

Given all these considerations it is possible to define the *Multicommodity Dynamical Flow Network*.

Definition 2. *Given a MTN and an exogenous inflow array $\lambda = (\lambda_i^{(k)})_{i \in \mathcal{E}, k \in \mathcal{K}}$, a Multicommodity Dynamical Flow Network (MDFN) is a dynamical systems satisfying equations (8)–(12) and*

$$f_{ij}^{(k)}(x) = R_{ij}^{(k)} d_i^{(k)}(x_i^{(k)}), \quad \forall x \in \mathcal{F}, i, j \in \mathcal{E}, k \in \mathcal{K}. \quad (14)$$

Equation (14) dictates that, for every free-flow state x in \mathcal{F} , the demand and routing constraints (11) are met with equality. In particular this yields

$$z_i^{(k)}(x) = \sum_{j \in \mathcal{E}} f_{ij}^{(k)}(x) = \sum_{j \in \mathcal{E}} R_{ij}^{(k)} d_i^{(k)}(x_i^{(k)}) = d_i^{(k)}(x_i^{(k)}), \quad (15)$$

for every free-flow state x in \mathcal{F} , cell i in $\mathcal{E} \setminus \mathcal{S}$ and commodity k in \mathcal{K} .

Notice that the definition above only models the behavior of the system within the free-flow region, so it is possible to use models that act differently outside of that region. To this end, we shall introduce two relevant examples.

Example 2. *Consider the following FIFO allocation rule*

$$f_{ij}^{(k)}(x) = \gamma_i^F(x) R_{ij}^{(k)} d_i^{(k)}(x_i^{(k)}) \quad (16)$$

where $\gamma_i^F = \max\{\gamma \in [0, 1] : (17)\}$,

$$\gamma \cdot \max_{\substack{j \in \mathcal{E} \\ R_{ij}^{(k)} > 0}} \sum_{k \in \mathcal{K}} \sum_{h \in \mathcal{E}} R_{hj}^{(k)} d_h^{(k)}(x_h^{(k)}) \leq s_j(\sum_{k \in \mathcal{K}} x_j^{(k)}), \quad (17)$$

i.e., γ_i^F is the maximum value in $[0, 1]$ such that for each cell j , with (i, j) in \mathcal{A} , the supply constraint is satisfied. This means that all the flows sent to downstream cells are scaled by the same value, even if for some cells more flow could be allocated. In the literature we found examples of FIFOs models in [6], [14], [7].

Example 3. *Consider the following non-FIFO allocation rule*

$$f_{ij}^{(k)}(x) = R_{ij}^{(k)} d_i^{(k)}(x_i^{(k)}) \min \left\{ 1, \frac{s_j \left(\sum_{h \in \mathcal{K}} x_j^{(h)} \right)}{\sum_{l \in \mathcal{E}} \sum_{h \in \mathcal{K}} R_{lj}^{(h)} d_l^{(h)}(x_l^{(h)})} \right\} \quad (18)$$

which states that when the supply function cannot accommodate all the incoming flows of all commodities, each flow is properly scaled based on the total amount each cell and commodity want to send. In [5] such non-FIFO allocation rule has been studied in the single-commodity case.

We conclude this section with the following standard result

establishing well-posedness of the initial value problem associated to any MDFN.

Lemma 1. *Consider a MDFN and define \mathcal{X} be as in (7). Then, there exists a map*

$$\varphi : \mathbb{R}_+ \times \mathcal{X} \rightarrow \mathcal{X},$$

such that for every \bar{x} in \mathcal{X} , $x(t) = \varphi(t, \bar{x})$ is the unique solution of the MDFN with initial state $x(0) = \bar{x}$.

We conclude this section by recalling a few standard definitions that will be used in the next section. For a MDFN:

- for $\delta > 0$ and x^* in \mathcal{X} ,

$$\mathcal{B}_\delta(x^*) = \{x \in \mathcal{X} : \|x - x^*\|_1 < \delta\};$$

- an equilibrium point is an array x^* in \mathcal{X} such that $\varphi(t, x^*) = x^*$ for every $t \geq 0$;
- an equilibrium point x^* is stable if for every $\varepsilon > 0$ there exists some $\delta > 0$ such that, for every x in $\mathcal{B}_\delta(x^*)$, we have that $\varphi(t, x) \in \mathcal{B}_\varepsilon(x^*)$ for every $t \geq 0$;
- the region of attraction of an equilibrium point x^* is defined as $\mathcal{A}(x^*) = \{x \in \mathcal{X} : \varphi(t, x) \xrightarrow{t \rightarrow +\infty} x^*\}$;
- an equilibrium point x^* is asymptotically stable if it is stable and there exists $\delta > 0$ such that $\mathcal{B}_\delta(x^*) \subseteq \mathcal{A}(x^*)$;
- an equilibrium point x^* is globally asymptotically stable if it is stable and $\mathcal{A}(x^*) = \mathcal{X}$.

III. EXISTENCE AND ASYMPTOTIC STABILITY OF FREE-FLOW EQUILIBRIUM POINTS

In this section we study the existence and asymptotic stability of free-flow equilibrium points of MDFNs, using single-commodity studies in [8] as a foundation.

Towards this goal, we start by introducing the notions of capacity region of a cell and of stability region of an MTN.

Definition 3. *Consider a MTN with topology $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, set of commodities \mathcal{K} , supply functions s_i and demand functions $d_i^{(k)}$ satisfying Assumption 1, and routing matrices $R^{(k)}$ satisfying Assumption 2, for every i in \mathcal{E} and k in \mathcal{K} . Then:*

- (i) *the capacity region of a non on-ramp cell i in $\mathcal{E} \setminus \mathcal{R}$ is*

$$\mathcal{C}_i = \left\{ \zeta \in \mathbb{R}_+^{\mathcal{K}} : \sum_{k \in \mathcal{K}} \zeta_k < s_i \left(\sum_{k \in \mathcal{K}} (d_i^{(k)})^{-1}(\zeta_k) \right) \right\}; \quad (19)$$

- (ii) *the stability region of the MTN is the set of inflow vectors λ in $\mathbb{R}_+^{\mathcal{E} \times \mathcal{K}}$ such that*

$$\left(\left((I - (R^{(k)})^\top)^{-1} \lambda^{(k)} \right)_{i \in \mathcal{E} \setminus \mathcal{R}} \right) \in \mathcal{C}_i, \quad \forall i \in \mathcal{E} \setminus \mathcal{R}, \quad (20)$$

and will be denoted by

$$\Lambda = \{ \lambda \in \mathbb{R}_+^{\mathcal{E} \times \mathcal{K}} : (20) \}.$$

A few comments are in order. First, consider the single-commodity case, i.e., the special case when $|\mathcal{K}| = 1$. In this case, the capacity region of each non on-ramp cell i in $\mathcal{E} \setminus \mathcal{R}$ is a semi-open interval $\mathcal{C}_i = [0, c_i)$ where the capacity value

$$c_i = \sup \{ d_i(\xi) : \xi \geq 0, d_i(\xi) < s_i(\xi) \},$$




Fig. 2: Capacity region with $|\mathcal{K}| = 2$, $d_i^{(1)}(\xi) = d_i^{(2)}(\xi) = \xi$, $s_i(\xi) = 2 - \xi$.

is either the value where the cell's demand and supply curves meet, or it is equal $+\infty$, when the two curves do not meet. On the other hand, for every exogenous flow vector λ in $\mathbb{R}_+^{\mathcal{E}}$,

$$(I - R^\top)^{-1} \lambda = \lambda + R^\top \lambda + (R^\top)^2 \lambda + (R^\top)^3 \lambda + \dots, \quad (21)$$

is a nonnegative vector that accounts for both direct and indirect effects of λ , as transported by the routing matrix R . Hence, in the single-commodity case, (20) requires that every entry $((I - R^\top)^{-1} \lambda)_i$ of the vector (21) corresponding to a non on-ramp cell i in $\mathcal{E} \setminus \mathcal{R}$ is strictly below the corresponding capacity value c_i .

In the multi-commodity case, i.e., when $|\mathcal{K}| > 1$, (19) defines the capacity region \mathcal{C}_i of a non on-ramp cell i in $\mathcal{E} \setminus \mathcal{R}$ as the set of non-negative vectors ζ in $\mathbb{R}_+^{\mathcal{K}}$ whose entry sum $\sum_k \zeta_k$ is strictly below the value of the cell's supply function $s_i(\cdot)$ computed in the sum across all commodities k in \mathcal{K} of the inverse demand functions $(d_i^{(k)})^{-1}(\zeta_k)$. For every exogenous inflow vector $\lambda^{(k)}$ in $\mathbb{R}_+^{\mathcal{E}}$ of a commodity k in \mathcal{K} , each nonnegative vector $(I - (R^{(k)})^\top)^{-1} \lambda^{(k)}$ again accounts for both direct and indirect effects of $\lambda^{(k)}$, as transported by commodity k 's routing matrix $R^{(k)}$. Condition (20) requires that, for every non on-ramp cell i in $\mathcal{E} \setminus \mathcal{R}$, the nonnegative vector ζ in $\mathbb{R}_+^{\mathcal{K}}$ with entries $((I - (R^{(k)})^\top)^{-1} \lambda)_i$ for every commodity k in \mathcal{K} , belongs to the capacity region \mathcal{C}_i .

Notice that, if the demand functions $d_i^{(k)}$ of a non onramp cell i in $\mathcal{E} \setminus \mathcal{R}$ are concave, their inverses $(d_i^{(k)})^{-1}$ are convex; if, moreover, the supply function s_i is concave non-increasing, then the composition $\zeta \mapsto s_i(\sum_{k \in \mathcal{K}} (d_i^{(k)})^{-1}(\zeta_k))$ is concave, hence in this case the capacity region \mathcal{C}_i of the cell i is convex. Since (20) dictates that a linear function of the exogenous flow λ belongs to the capacity region \mathcal{C}_i for every non onramp cell i in $\mathcal{E} \setminus \mathcal{R}$, we get that a MTN whose demand and supply functions are all concave has a convex stability region Λ .

Example 1 (continued). *Recall the demand and supply functions previously defined. Here we will set $\beta = \alpha = 1$ and $\gamma = 2$, which yields $d_i^{(k)}(\xi) = \xi$ and $s_i(\xi) = 2 - \xi$. Hence for every ζ_k in \mathbb{R}_+ , this implies that $(d_i^{(k)})^{-1}(\zeta_k) = \zeta_k$. For the sake of simplicity we shall assume to have only two commodities, namely a and b . Then, for any non-onramp cell i in $\mathcal{E} \setminus \mathcal{R}$, we can compute the capacity region as $\mathcal{C}_i = \{ \zeta \in \mathbb{R}_+^2 : \zeta_a + \zeta_b < 1 \}$. The capacity region of a cell i just found can be seen in Figure 2.*

We are now ready to state our first result providing necessary and sufficient conditions for the existence and uniqueness of a free-flow equilibrium in a MDFN.

Proposition 1. *Consider a MTN satisfying Assumptions 1*

and 2, and let Λ be its stability region. Then, every MDFN with exogenous inflow array λ admits a free-flow equilibrium point if and only if $\lambda \in \Lambda$. Moreover, in this case, the free-flow equilibrium point is unique.

We shall now introduce the concept of l_1 -nonexpansiveness useful for the stability analysis.

Definition 4. The MDFN is l_1 -nonexpansive in a region $\mathcal{R} \subseteq \mathcal{X}$ if for every x and y in \mathcal{R} and for every $T \geq 0$ such that

$$\varphi(s, x), \varphi(s, y) \in \mathcal{R}, \quad \forall 0 \leq s \leq T, \quad (22)$$

we have that

$$\|\varphi(t, y) - \varphi(t, x)\|_1 \leq \|y - x\|_1 \quad (23)$$

Lemma 2. Every MDFN is l_1 -nonexpansive in every convex subset $\mathcal{D} \subseteq \mathcal{F}$ of its free-flow region.

Lemma 3. Consider a MDFN. For a free-flow equilibrium point x^* in \mathcal{F} , let

$$\delta^* = \sup\{\delta > 0 : \text{MDFN is } l_1\text{-nonexpansive on } \mathcal{B}_\delta(x^*)\}$$

If x^* is asymptotically stable, then $\mathcal{B}_{\delta^*}(x^*) \subseteq \mathcal{A}(x^*)$.

We are now ready to state and prove our main result.

Theorem 1. Consider a MTN satisfying Assumptions 1 and 2 and let λ in Λ be an exogenous inflow array within its stability region. Consider a MDFN and let x^* in \mathcal{F} be its unique free-flow equilibrium. Define

$$\bar{\delta} = \inf_{x \in \mathcal{X} \setminus \mathcal{F}} \|x - x^*\|_1 > 0. \quad (24)$$

Then, x^* is asymptotically stable and

$$\mathcal{B}_{\bar{\delta}}(x^*) \subseteq \mathcal{B}_{\delta^*}(x^*) \subseteq \mathcal{A}(x^*).$$

We now show that, as a special case, Theorem 1 recovers a result first proven in [5].

Corollary 1. Consider a MTN with $|\mathcal{K}| = 1$, satisfying Assumptions 1 and 2 and let λ in Λ be an exogenous inflow array within its stability region. Consider the MDFN with the non-FIFO allocation rule (18). Then, the free-flow equilibrium point x^* is globally asymptotically stable.

The following result concerns another special case when Theorem 1 ensures global asymptotic stability of the free-flow equilibrium point.

Corollary 2. Given $\lambda \in \Lambda$, let $x^* \in \mathcal{F}$ be such that

$$(x_i^{(k)})^* = (d_i^{(k)})^{-1} \left((\mathcal{I} - (R^{(k)})^\top)^{-1} \lambda^{(k)} \right)_i \quad \forall i \in \mathcal{E}, k \in \mathcal{K} \quad (25)$$

If for every $t \geq 0$ holds that

$$s_i \left(\sum_{k \in \mathcal{K}} x_i^{(k)} \right) > \sum_{k \in \mathcal{K}} d_i^{(k)} (x_i^{(k)}) \quad \forall i \in \mathcal{E} \quad (26)$$

then the equilibrium point x^* is GAS.

IV. AN ANALYTICAL EXAMPLE

Even though it is possible to characterize free-flow equilibrium points analytically, it does not appear clear whether




Fig. 3: Diverge junction network

some non free-flow equilibrium points may arise and, if they do so, under what circumstances. In order to address this problem, we introduce a relevant example, while keeping the dimensionality of the MDFN as low as possible.

Consider the network $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ in Figure 3 with $\{1\}$ in \mathcal{R} and $\{2, 3\}$ in \mathcal{S} . The flow is split into two commodities, namely a and b , that interact with each other in a non-FIFO manner. Assume demand and supply functions as in Example 1, where for each demand $\xi = x_i^{(k)}$ and for each supply $\xi = \sum_k x_i^{(k)}$. Commodity a is equally split between cells 2 and 3, while commodity b is sent entirely towards cell 2. Thus, the routing matrices, $R^{(a)}$ and $R^{(b)}$, can be defined such that $R_{12}^{(a)} = R_{13}^{(a)} = 0.5$, $R_{12}^{(b)} = 1$ and equal to 0 otherwise.

Once our framework has been set, we can delve into the study of the stability of the MDFN. Firstly, it is crucial to understand under what conditions an equilibrium does exist, i.e., the maximum amount of exogenous inflow that can be handled by the network. To this end, the fact that at equilibrium the difference between the total incoming and out-going flow must be zero implies the existence of a region Λ_B , defined as $\Lambda_B = \{\lambda \in \mathbb{R}^2 : \lambda_1^{(a)} + \lambda_1^{(b)} \leq 2\}$. Recall that, in (20), we defined the region for which a free-flow equilibrium point does exist. In our example, this stability region is $\Lambda_{FF} := \Lambda = \{\lambda \in \mathbb{R}^2 : \lambda_1^{(a)} + 2\lambda_1^{(b)} < 2\}$. Notice that $\Lambda_{FF} \subseteq \Lambda_B$, which follows from the fact that Λ_B is the biggest region that makes an equilibrium admissible. Moreover, this implies the existence of a third region $\Lambda_{B \setminus FF}$ such that $\Lambda_{FF} \cup \Lambda_{B \setminus FF} = \Lambda_B$.

Only four scenarios may arise: (i) free-flow, (ii) congestion on cell 2, (iii) congestion on cell 3, and (iv) congestion on both cells 2 and 3. Our analysis will then proceed by analytically finding the equilibrium points in each of those.

(i) **free-flow:** as proven, a free-flow equilibrium point exists only if λ is in Λ_{FF} and can be computed as

$$\begin{aligned} (x^{(a)})^* &= (\mathcal{I} - (R^{(a)})^\top)^{-1} \lambda^{(a)} \\ (x^{(b)})^* &= (\mathcal{I} - (R^{(b)})^\top)^{-1} \lambda^{(b)} \end{aligned}$$

Thus, we find

$$\begin{aligned} (x^{(a)})^* &= (\lambda_1^{(a)}, \frac{1}{2}\lambda_1^{(a)}, \frac{1}{2}\lambda_1^{(a)}) \\ (x^{(b)})^* &= (\lambda_1^{(b)}, \lambda_1^{(b)}) \end{aligned}$$

(ii) **Congestion only on cell 2:** in the non-FIFO model this implies that

$$0 < \frac{2 - x_2^{(a)} - x_2^{(b)}}{\frac{1}{2}x_1^{(a)} + x_1^{(b)}} < 1 \quad (27)$$

Since $x_2^{(a)} + x_2^{(b)} = 1$, because cell 2 is a congested off-ramp, we solve the equations of equilibrium, yielding




Fig. 4: Stability and bounded regions with points $A = (0.5, 0.5)$, $B = (1.2, 0.5)$ and $C = (1.5, 0.5)$

$$\begin{aligned} (x^{(a)})^* &= (2(\lambda_1^{(a)}), 1 - \lambda_1^{(b)}, \lambda_1^{(a)} + \lambda_1^{(b)} - 1) \\ (x^{(b)})^* &= \left(\frac{\lambda_1^{(b)}(\lambda_1^{(a)} + \lambda_1^{(b)} - 1)}{1 - \lambda_1^{(b)}}, \lambda_1^{(b)} \right) \end{aligned}$$

Hence, the equilibrium point is unique and by substituting it in (27) yields the inequality

$$\lambda_1^{(a)} + 2\lambda_1^{(b)} > 2 \rightarrow \lambda \in \Lambda_{B \setminus FF}$$

So, a congestion happening on cell 2 allows for an equilibrium x^* only if λ is chosen outside of the stability region.

- (iii) **Congestion only on cell 3:** in this particular setting this case never occurs. Indeed, since cell 3 always receives less flow, if it is congested so is cell 2;
- (iv) **Congestion on both cells 2 and 3:** this case can be interpreted as

$$\begin{aligned} 0 &< \frac{2 - x_2^{(a)} - x_2^{(b)}}{\frac{1}{2}x_1^{(a)} + x_1^{(b)}} < 1 \\ 0 &< \frac{2 - x_2^{(a)}}{\frac{1}{2}x_1^{(a)}} < 1 \end{aligned}$$

Again, it is possible to solve the equilibrium's equation, yielding

$$\begin{aligned} (x^{(a)})^* &= \left(c \frac{\lambda_1^{(a)} - 1}{\frac{1}{2}\lambda_1^{(b)}}, \lambda_1^{(a)} - 1, 1 \right) \\ (x^{(b)})^* &= \left(c, \lambda_1^{(b)} \right) \end{aligned}$$

where c is in \mathbb{R}_+ . So, there are infinitely many equilibrium points, that have different values of $x_1^{(a)}$ and $x_2^{(b)}$. Moreover, if we substitute an equilibrium point into the condition $x_2^{(a)} + x_2^{(b)} = 1$, we obtain $\lambda_1^{(a)} + \lambda_1^{(b)} = 2$ so that $\lambda \in \partial\Lambda_B$. To summarize, a continuum of equilibrium points can arise if λ is chosen on the boundary of Λ_B .

To validate these results, we provide simulation of the system by choosing three different combinations of exogenous inflows as shown in Figure 4. Moreover, for each combination two different initial conditions $x(0)$ and $\tilde{x}(0)$ are considered.

Given the exogenous inflows λ , it is possible to compute the equilibrium points for each case separately.

$$\begin{aligned} x_{FF}^* &= (0.5, 0.5, 0.25, 0.5, 0.25) \\ x_{B \setminus FF}^* &= (1.4, 0.7, 0.5, 0.5, 0.7) \\ x_{\partial B}^* &= (2c, c, 0.5, 0.5, 1) \end{aligned}$$

The results, shown in Figure 5, show that if λ is chosen inside or outside the stability region, the trajectories corresponding to the two initial conditions converge to the same equilibrium point. On the contrary, when λ is chosen on the

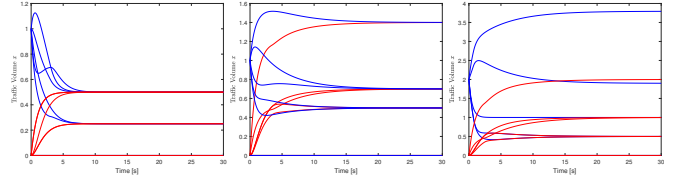


Fig. 5: Two initial conditions ($x(0)$ in red and $\tilde{x}(0)$ in blue) under different exogenous inflows: $\lambda \in \Lambda_{FF}$ (left), $\lambda \in \Lambda_{B \setminus FF}$ (middle) and $\lambda \in \Lambda_B$ (right).

boundary of Λ_B , different initial condition may converge to different equilibrium points.

V. CONCLUSIONS

This paper studies a class of dynamical systems based on dynamical flow networks led by mass conservation laws, that act similarly in the free-flow region. This allows us to analyze its stability properties and discuss the presence of equilibrium points. Moreover, through an insightful example it is shown the existence of equilibrium points not in free-flow. Future researches could focus on generalizing the presence of congested equilibrium points to any network and on studying the system's global stability.

REFERENCES

- [1] M. J. Lighthill and G. B. Whitham, "On kinematic waves i. flood movement in long rivers," *Phil. Trans. R. Soc.*, vol. A, no. 229, pp. 281–316, 1955.
- [2] M. J. Lighthill and G. B. Whitham, "On kinematic waves ii. a theory of traffic flow on long crowded roads," *Phil. Trans. R. Soc.*, vol. A, no. 229, pp. 317–345, 1955.
- [3] C. F. Daganzo, "The cell transmission model: A dynamic representation of highway traffic consistent with the hydrodynamic theory," *Transportation Research Part B: Methodological*, vol. 28, no. 4, pp. 269–287, 1994.
- [4] C. F. Daganzo, "The cell transmission model, part ii: Network traffic," *Transportation Research Part B: Methodological*, vol. 29, no. 2, pp. 79–93, 1995.
- [5] E. Lovisari, G. Como, and K. Savla, "Stability of monotone dynamical flow networks," in *53rd IEEE Conference on Decision and Control*, pp. 2384–2389, 2014.
- [6] G. Como, E. Lovisari, and K. Savla, "Convexity and robustness of dynamic traffic assignment and freeway network control," *Transportation Research Part B: Methodological*, vol. 91, pp. 446–465, 2016.
- [7] C. Rosdahl, G. Nilsson, and G. Como, "On distributed optimal control of traffic flows in transportation networks," in *2018 IEEE Conference on Control Technology and Applications (CCTA)*, pp. 903–908, Aug. 2018.
- [8] S. Coogan and M. Arcak, "A compartmental model for traffic networks and its dynamical behavior," *IEEE Transactions on Automatic Control*, vol. 60, no. 10, pp. 2698–2703, 2015.
- [9] S. Coogan, M. Arcak, and A. A. Kurzhanskiy, "Mixed monotonicity of partial first-in-first-out traffic flow models," in *2016 IEEE 55th Conference on Decision and Control (CDC)*, pp. 7611–7616, 2016.
- [10] S. Samaranayake, J. Reilly, W. Krichene, M. L. Delle Monache, P. Goatin, and A. Bayen, "Discrete-time system optimal dynamic traffic assignment (SO-DTA) with partial control for horizontal queueing networks," *Transportation Science*, vol. 52, no. 4, pp. 982–1001, 2018.
- [11] G. Nilsson, G. Como, and E. Lovisari, "On resilience of multicommodity dynamical flow networks," in *Proceedings of the 53rd IEEE Conference on Decision and Control*, pp. 5125–5130, 2014.
- [12] G. Nilsson and S. Coogan, "The strong integral input-to-state stability property in dynamical flow networks," *IEEE Transactions on Automatic Control*, vol. 69, no. 2, pp. 1179–1185, 2023.
- [13] D. Sipione and G. Como, "On the stability of dynamical multi-commodity flow networks," *arXiv preprint arXiv:2508.17804*, 2025.
- [14] G. Como, E. Lovisari, and K. Savla, "Convexity and robustness of dynamic network traffic assignment for control of freeway networks," *IFAC-PapersOnLine*, vol. 49, no. 3, pp. 335–340, 2016. 14th IFAC Symposium on Control in Transportation SystemsCTS 2016.