

Low-Velocity Impact on Composite Stiffened Panels using a Component-Wise Approach

Original

Low-Velocity Impact on Composite Stiffened Panels using a Component-Wise Approach / Petrolo, M., Franceschini, C., Filippi, M., Carrera, E.. - (2026). (V International Conference on Mechanics of Advanced Materials and Structures (ICMAMS) Toulouse, France 1-3 July 2026).

Availability:

This version is available at: 11583/3012704 since: 2026-07-04T10:05:11Z

Publisher:

JN Reddy, E. Carrera

Published

DOI:

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

Low-Velocity Impact on Composite Stiffened Panels Using a Component-Wise Approach

Marco Petrolo^{*,a}, Chiara Franceschini^b, Matteo Filippi^c, Erasmo Carrera^d

MUL2 lab, Department of Mechanical and Aerospace Engineering, Politecnico di Torino, Italy

^{*}amarco.petrolo@polito.it, ^bchiara.franceschini@polito.it, ^cmatteo.filippi@polito.it,
^derasmo.carrera@polito.it

Keywords: Low-velocity impact; Stiffened panels; CUF.

Abstract. Composite stiffened panels, widely used in the aerospace sector, are exposed to low-velocity impacts (LVI) during operation, maintenance, and transport [1]. Computational methods help predict deformation and the extent of damage under dynamic loading, reducing the need for an extensive testing campaign [2]. In this work, structural theories based on the Carrera Unified Formulation (CUF) are proposed for the analysis of low-velocity impacts on stiffened composite panels [3]. The dynamic response of both the skin and the stiffeners is described through refined 1D/2D elements with higher-order kinematic expansions, enabling an accurate evaluation of local deformation effects and stress concentrations, especially at the skin-stiffener interface. Continuum damage and delamination models are used to handle nonlinearities. The proposed approach is assessed on representative composite stiffened panels subjected to LVI, as shown in Fig. 1. The results are compared with those obtained from commercial finite element models based on full 3D discretization. The comparison shows that the CUF-based models provide accurate predictions of the structural response while reducing the computational cost in terms of Degrees of Freedom (DOFs). These features make the proposed methodology an efficient alternative to conventional 3D modelling strategies for the design and analysis of lightweight composite stiffened structures.

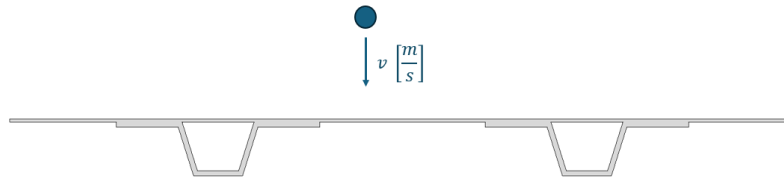


Figure 1: Schematic representation of the impact on a stiffened composite plate.

Acknowledgments

This study was carried out within the Space It Up! project funded by the Italian Space Agency, ASI, and the Ministry of University and Research, MUR, under contract n. 2024-5-E.0 - CUP n. I53D24000060005.

References

- [1] E. Greenhalgh, M. Hiley. “The assessment of novel materials and processes for the impact tolerant design of stiffened composite aerospace structures”. *Composites Part A: Applied Science and Manufacturing*, vol. 34, no. 2, pp. 151–161, 2003.
- [2] M. Rahman, E. Maravilla, S. Devaru, S. Lin, A. Waas, V. Ranatunga. “A Computational Method for Predicting the Damage and Failure Due to Impact of Double Hat Stiffened Aircraft Skin Panel”. *Aerotecnica Missili & Spazio*, 2025, doi:10.1007/s42496-025-00301-4.
- [3] E. Carrera, M. Cinefra, M. Petrolo, and E. Zappino, “Finite Element Analysis of Structures through Unified Formulation”. Hoboken, NJ, USA: Wiley, 2014.