POLITECNICO DI TORINO
Repository ISTITUZIONALE

Optimizing Thermographic Fatigue-Limit Estimation: GPR, SVR, and Stacking Ensembles within the Two Curves Method for C45 Steel

Original
Optimizing Thermographic Fatigue-Limit Estimation: GPR, SVR, and Stacking Ensembles within the Two Curves Method for C45 Steel / Sesana, R., Corsaro, L., Cura, F.M., Dehghanpour Abyaneh, M., Sadegh Javadi, M.. - In: THE E-JOURNAL OF NONDESTRUCTIVE TESTING. - ISSN 1435-4934. - ELETTRONICO. - 31:(2026), pp. 1-2. (14 European Conference on Non Destructive Testing Verona (ITA) June 15-19, 2026) [10.58286/33557].

Availability:
This version is available at: 11583/3013228 since: 2026-07-17T07:43:42Z

Publisher:
NDT.net

Published
DOI:10.58286/33557

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

08 November 2026

e-Journal of Nondestructive Testing - ISSN 1435-4934 - www.ndt.net
14th European Conference on Non-Destructive Testing, Verona, Italy (ECNDT 2026)

Optimizing Thermographic Fatigue-Limit Estimation: GPR, SVR, and Stacking Ensembles within the Two Curves Method for C45 Steel

Raffaella Sesana[1,*], Luca Corsaro[1], Francesca Cura[1],

Mohsen Dehghanpour Abyaneh[1] and Mohammad

Sadegh Javadi[2]

[1]Politecnico di Torino, Torino - 10124, Italy
[2]Amirkabir University of Technology, 424, Tehran P.O. Box - Iran
[*]*Corresponding author, raffaella.sesana@polito.it*

More info about this article: https://www.ndt.net/?id=33557

1 Abstract

Passive Infrared Thermography provides an approach to estimate fatigue limits rapidly by extracting thermal parameters during loading. However, the application of the Two Curves Method (TCM) during the fatigue resistance computation may result in sparse measurements of the thermal parameter and approximating curves adopted for analysis. Based on thermal emissions measurements of C45 steel, the current study suggests a TCM-machine-learning model enhancing continuity of the approximating curves and minimizing scatters by training continuous surrogates of the experimental thermal behavior. Three other regressors are used to model thermal parameters: (i) Gaussian Process Regression (GPR), (ii) Support Vector Regression (SVR), and (iii) a stacking ensemble combinig the use of both kernel and tree learners through a regularized meta-model. The ML-augmented thermal curves are extrapolated into TCM by use of Linear-Linear and Parabola-Power-law estimates and the fatigue-limit estimates obtained are compared to Staircase references at 50 and 1 percent failure probability. Findings indicate that the suggested surrogates reduce the between strategies variation and narrow agreement between ΔT- and A-based intersections on a regular occasion, whereas uncertainty in GPR offers a viable confidence mark of the end estimate.

Keywords: passive thermography; fatigue limit; Two Curves Method; Gaussian process regression; uncertainty quantification.

2 Introduction

This The use of IR thermography dates back to the year of around 1930, the Passive Thermography (PT) was the first IR technology to be realized through early IR cameras and was initially used in remote sensing of forest-fires but later diversified to other applications [1]. PT was used in mechanical engineering to measure the temperature of the processes in hot steel rolling and subsequently became entrenched in production and maintenance in line with the condition monitoring practices [1,2]. Since the 1970s the use of PT to fatigue testing to evaluate crack and damage has been extended, leading to the development of faster methods of estimating fatigue limits such as the One Curve Method as an alternative to traditional methods such as the Staircase Method, and subsequent iterative methods such as the Two Curves Method (TCM) [3,4,5].

More broadly, materials science increasingly benefits from datasets of material

© 2026 The Authors. Published by NDT.net under License CC-BY-4.0 https://creativecommons.org/licenses/by/4.0/
https://doi.org/10.58286/33557

properties, and integrating these resources with regression machine learning models can accelerate development and improve efficiency [6]. Gaussian Process Regression (GPR), Support Vector Regression (SVR) and stacking ensemble models are particularly suited to modelling complex non-linear relationships by learning patterns from prior observations, which supports their use across engineering and other application areas [7]. Figure 1 shows the flowchart of a sample stacking ensemble process.

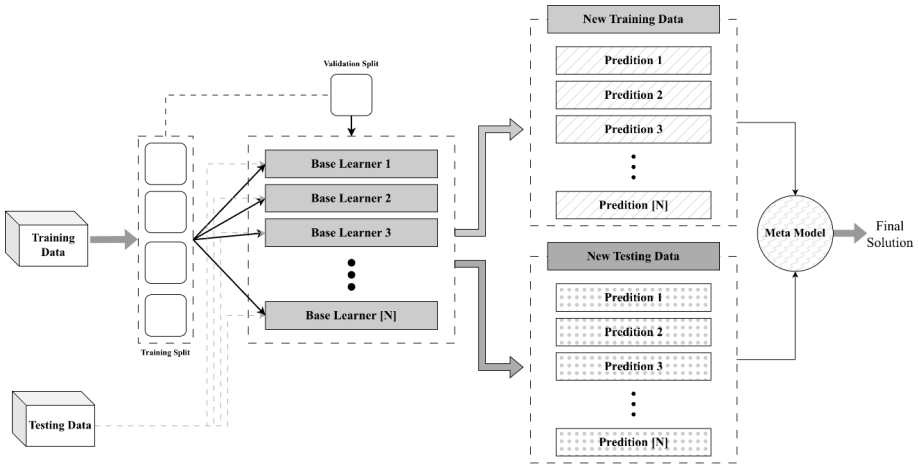

Fig. 1. Flowchart of a sample stacking ensemble process.

References

1. Maldague, X: Nondestructive evaluation of materials by infrared thermography. NDT and E International**,** 6, 396 (1996)
2. Doshvarpassand, S., Wu, C., Wang, X: An overview of corrosion defect characterization using active infrared thermography. Infrared Physics & Technology, 96, 366-389, doi:https://doi.org/10.1016/j.infrared.2018.12.006 (2019)
3. Curti, G., Geraci, A., Risitano, A: Un nuovo metodo per la determinazione rapida del limite di fatica. ATA ,10 (1989).
4. Standardization, I.O.f. Metallic Materials: Fatigue Testing: Statistical Planning and Analysis of Data; ISO (2003).
5. Curà, F., Curti, G., Sesana, R: A new iteration method for the thermographic determination of fatigue limit in steels. International Journal of Fatigue 27, 453-459, doi:https://doi.org/10.1016/j.ijfatigue.2003.12.009 (2005).
6. Stergiou, K., Ntakolia, C., Varytis, P., Koumoulos, E., Karlsson, P., Moustakidis, S: Enhancing property prediction and process optimization in building materials through machine learning: A review. Computational Materials Science, 220, 112031, doi:https://doi.org/10.1016/j.commatsci.2023.112031 (2023).
7. Basheer, I.A., Hajmeer, M: Artificial neural networks: fundamentals, computing, design, and application. Journal of Microbiological Methods, 43, 3-31, doi:https://doi.org/10.1016/S0167-7012(00)00201-3 (2000).