



POLITECNICO DI TORINO  
Repository ISTITUZIONALE

SENSITIVITY ANALYSIS OF ANALYTICAL MODELS FOR THE PREDICTION OF  
TRAILING-EDGE NOISE

*Original*

SENSITIVITY ANALYSIS OF ANALYTICAL MODELS FOR THE PREDICTION OF TRAILING-EDGE NOISE /  
ZAMPINO, GERARDO; FERRERO, ANDREA; ARINA, RENZO. - ELETTRONICO. - (2019), pp. 1-18. ((Intervento  
presentato al convegno 17th European Turbulence Conference tenutosi a Torino (Italy) nel 3 Sep 2019 - 6 Sep 2020.

*Availability:*

This version is available at: 11583/2787490 since: 2020-01-30T22:28:39Z

*Publisher:*

EuroMECH

*Published*

DOI:

*Terms of use:*

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in  
the repository

*Publisher copyright*

(Article begins on next page)


## SENSITIVITY ANALYSIS OF ANALYTICAL MODELS FOR THE PREDICTION OF TRAILING-EDGE NOISE

Gerardo Zampino, Andrea Ferrero & Renzo Arina  
*Politecnico di Torino, Torino, Italy*

Airfoil self noise occurs when an airfoil is placed in a disturbed or uniform and steady fluid flow. As in most aeroacoustic noise generation situations, noise is generated by flow unsteadiness. In the case of airfoil self noise, it is the interaction of flow unsteadiness, in form of fluid turbulence, with the airfoil surface leading to broadband noise. Though less painful than tonal noise, broadband noise is a matter of great interest in technologies that utilize airfoils and airfoil-like shapes. It may become the major contribution either because tonal noise is hidden due to its low level, or because tonal noise escapes the range of human hearing. Moreover broadband noise is the only remaining contribution for surfaces in non accelerated motion, such as structures in the wind.

There are mainly two broadband noise-generating mechanisms, namely the interaction with upstream turbulence, the *turbulence-interaction noise*, involving the breakdown of oncoming vortices on the leading edge of the airfoil, and the boundary-layer turbulence scattering at the trailing edge, referred as *trailing-edge (TE) noise*. Turbulent eddies are formed within the boundary layer and it is the interaction of these eddies with the TE that generates broadband aerodynamic noise. In acoustic terms, the edge presents itself as a sharp impedance discontinuity, scattering acoustic waves generated by fluid turbulence and creates an intensified radiated acoustic field.

The focus of the present work is on TE noise generation and its prediction. Calculating TE noise is made difficult due to the complexity of the noise source, which is a turbulent flow. Numerical approaches based on direct simulations or hybrid techniques are aimed at understanding the tiniest details of the sound generating mechanism. This is achieved at a price of time-consuming computations. On the other side, analytical methods, based on acoustic analogy and wave scattering theory, are not devoted to reproducing the details of noise generating mechanisms, but rather to provide acceptable order of magnitude of the generated sound with fast and inexpensive calculations. They provide the right trends and scaling laws which are needed for the assessment of low-noise airfoil design.

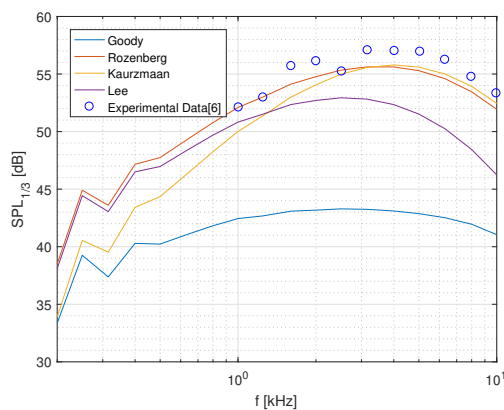

**Figure 1.** Pressure spectrum (NACA0012 airfoil,  $\alpha = 0 \text{ deg}$ ,  $U_\infty = 71.3 \text{ m/s}$ )

The TE noise radiated by aNACA0012 airfoil, at zero incidence, is studied. The mean turbulent flow past the airfoil is calculated solving the Reynolds Averaged Navier-Stokes equations with the Spalart-Allmaras turbulence model. The boundary-layer thickness at the TE, an empirical wall pressure spectral density and the correlation length, calculated introducing the Corcos hypothesis, as function of the frequency, are the inputs for the analytical models describing the acoustic radiation.

The most popular models, proposed in the literature, are compared. Namely the models of Amiet [1], Goody [2], Rozenberg [7], Kamruzzaman [5] and Lee [3]. The predicted pressure spectra are compared with the experimental data [6, 4] in Figure 1.

A sensitivity analysis will be carried out in order to understand how the output of each acoustic model is influenced by the boundary-layer parameters predicted by the RANS simulations. In particular, a Monte Carlo method will be adopted to estimate the uncertainty propagation for the different analytical models.

### References

- [1] R. K. Amiet. Acoustic radiation from an airfoil in a turbulent stream. *Journal of Sound and Vibration*, **41**:407–420, 1975.
- [2] M. Goody. Empirical spectral model of surface pressure fluctuations. *AIAA Journal, American Institute of Aeronautics and Astronautics*, **42**:1788–1794, 2004.
- [3] S. Lee and A. Villaescusa. Comparison and assessment of recent empirical models for turbulent boundary layer wall pressure spectrum. *23rd AIAA/CEAS Aeroacoustics Conference*, 2017.
- [4] Rautmann M. Kamruzzaman D. Bekiropoulos A. Iob R. Arina P. Battern S. Chakravarthy F. Bertagnolio M. Herr, R. Ewert. Broadband trailing-edge noise predictions: Overview of banc-iii results. *21st AIAA/CEAS Aeroacoustics Conference*, 2015.
- [5] Th. Lutz W. Würz M. Kamruzzaman, D. Bekiropoulos and E. Krämer. A semi-empirical surface pressure spectrum model for airfoil trailing-edge noise prediction. *Aeroacoustics*, **14**:833–882, 2015.
- [6] D. Pope T. Brooks and M. Marcolini. Airfoil self-noise and prediction. *NASA reference publication*, 1989.
- [7] Gilles Robert Y. Rozenberg and S. Moreau. Wall-pressure spectral model including the adverse pressure gradient effects. *AIAA Journal, American Institute of Aeronautics and Astronautics*, **50**:2168–2179, 2012.